DISTRIBUTION STATEMENT A
Approved for Public Release
Distribution Unlimited

BALLISTIC MISSILE
DEFENSE ORGANIZATION
7100 Defense Pentagon
Washington, D.C. 20301-7100

GEORGIA TECH GT–VNUC
VLSI DESIGN VERIFICATION DOCUMENT

VLSI DEVELOPMENT REPORT
REPORT NO. VDR–0142–90–011
JULY 5, 1991

GUIDANCE, NAVIGATION AND CONTROL
DIGITAL EMULATION TECHNOLOGY LABORATORY

Contract No. DASG60–89–C–0142
Sponsored By
The United States Army Strategic Defense Command

COMPUTER ENGINEERING RESEARCH LABORATORY

Georgia Institute of Technology
Atlanta, Georgia 30332–0540

Contract Data Requirements List Item A006
Period Covered: Not Applicable
Type Report: As Required

UL13196

20010822 060

DISCLAIMER

DISCLAIMER STATEMENT – The views, opinions, and / or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other official documentation.

DISTRIBUTION CONTROL

(1) DISTRIBUTION STATEMENT – Approved for public release; distribution is unlimited.

(2) This material may be reproduced by or for the U.S. Government pursuant to the copyright license under the clause at DFARS 252.227–7013, October 1988.

GEORGIA TECH GT–VNUC
VLSI DESIGN VERIFICATION DOCUMENT

JULY 5, 1991

Prem Pahlajrai and Toshiro Kubota

COMPUTER ENGINEERING RESEARCH LABORATORY

Georgia Institute of Technology
Atlanta, Georgia 30332–0540

Eugene L. Sanders
USASDC
Contract Monitor

Cecil O. Alford
Georgia Tech
Project Director

Copyright 1991
Georgia Tech Research Corporation (GTRC)
Centennial Research Building
Atlanta, Georgia 30332

GEORGIA TECH GT–VNUC
VLSI DESIGN VERIFICATION DOCUMENT

INTRODUCTION

There are eleven (11) Georgia Tech VLSI designs (see Table 1) in the AHAT Program. Each of these designs has been produced by Georgia Tech using the Genesil Silicon Compiler. Each design has passed the design verification process at Silicon Compiler Systems / Mentor Graphics and each has been fabricated in a bulk CMOS process (fabrication of certain chips was not complete when this document was released). Each of the Georgia Tech designs listed in Table 1 is being delivered to USASDC and to the Harris Corporation for conversion and fabrication in a rad–hard process. The program under which this work is done is AHAT (Advanced Hardened Avionics Technology). This document includes design information for the Georgia Tech non–uniformity compensation chip, GT–VNUC.

Table 1. Georgia Tech Chip Set for AHAT

Design	DV Passed	Tape Delivered	Fabricated	Tested
GT–VFPU/1A	01/17/89	08/03/90	05/19/89	04/04/90
GT–VSNI	01/17/89	05/23/90	04/14/89	04/04/90
GT–VSM8	01/17/89	06/08/90	05/06/89	04/04/90
GT–VCTR	02/08/90	07/12/90	07/13/90	07/27/90
GT–VCLS	01/26/90	07/12/90	07/13/90	07/27/90
GT–VSF	09/12/89	07/19/90	07/13/90	07/27/90
GT–VTHR	12/11/90	02/15/91	03/01/91	03/08/91
GT–VDAG	02/22/91	02/25/91	05/01/91	
GT–VIAG	03/08/91	03/11/91	05/07/91	
GT–VTF				
GT–VNUC		07/05/91		

Table 2. Georgia Tech Documents Sent for AHAT

Document Item	Date Sent
Georgia Tech GT–VFPU VLSI Design Verification Document	05/15/90
Georgia Tech GT–VSNI VLSI Design Verification Document	05/23/90
Georgia Tech GT–VSM8 VLSI Design Verification Document	06/08/90
Georgia Tech GT–VCTR VLSI Design Verification Document	07/12/90
Georgia Tech GT–VCLS VLSI Design Verification Document	07/12/90
Georgia Tech GT–VSF VLSI Design Verification Document	07/19/90
Data Address Generation GT–VDAG Programming Model Document (v.2)	01/03/91
Instruction Address Generation GT–VIAG Programming Model Document (v.1)	01/03/91
GT–EP I/O Interface Specification Note	01/17/91
EP, SNI, SM8 Interconnection Note	01/28/91
Georgia Tech GT–VTHR VLSI Design Verification Document	02/15/91
Georgia Tech GT–VDAG VLSI Design Verification Document	02/25/91
Georgia Tech GT–VIAG VLSI Design Verification Document	03/11/91
GT–FPU: Operating Speed Test Document	04/16/91
Staggered Row Focal Plane Array Analysis Document	05/01/91
GT–EP Pascal Compiler Note, Source Code, and Program Examples	05/06/91
Instruction Address Generation GT–VIAG Programming Model Document (v.2)	06/07/91
Georgia Tech GT–VNUC VLSI Design Verification Document	07/05/91

GT–VNUC : Non–Uniformity Compensation

1. Design Verification Checklist

The DV checklist is attached in Appendix A.

2. Functional Description

The GT–VNUC (call NUC) compensates non–linear responses of a FPA by up to 4 linear segments. First the FPA is exposed to known intensity values (calibration intensities) and the responses from every pixel (calibration responses) are stored in external memories. After the calibration, the NUC reads responses of FPA pixels in scan order and performs the compensation by the following equation,

$$Pixel\_out = \frac{(fpa\_pixel - O_{cn})(I_{n+1} - I_n)}{O_{cn+1} - O_{cn}} + I_n \qquad [1]$$

where *fpa_pixel* is the FPA response, O_{cn} and O_{cn+1} are the calibration response of the current pixel which the *fpa_pixel* falls between ($O_{cn} < O_{cn+1}$). I_n and I_{n+1} are the calibration intensities corresponding to O_{cn} and O_{Cn+1} respectively.

The following sections describe briefly the function of each module.

2.1. Module *state_mach*

This module preforms basically four functions: synchronizes the chip with respect to the pixel clock, preforms a binary search to determine which linear segment the current pixel response lies on (ie. find O_{cn} and O_{cn+1}), detects an invalid response during calibration and generates control signals for the rest of the chip to synchronize their operations with respect to the pixel clock.

2.1. 1. Sub–module *clock_sync*

This module synchronizes the pixel clock to the 4X chip clock.

2.1. 2. Sub–module *control*

This PLA directs the binary search. For more information about how the binary search works, see the GT–VNUC Design Document.

2.1. 3. Sub–module *cal_out_gen*

This module contains various latches to hold pixel data and memory data. The flow of the data is controlled by the signals coming out from the sub–module ***control.***

2.1. 4. Sub–module *bad_pixel*

While the chip is in the calibration mode, this module examines the incoming pixel data and checks if it is monotonically increasing as the calibration intensity increases. If not, the pixel is marked as 'bad pixel' by forcing the response of the highest calibration intensity to zero and storing zero to the corresponding memory location in the external RAMs. For information about a bad_pixel detection algorithm, see the GT–VNUC Design Document or GT–VNUC User Guide.

2.1. 5. Sub–module *subtract*

A comparator to check if the pixel data is larger than memory data. The result *gte* is one of the signals passed to the ***control*** to decide the direction of the binary search.

2.1. 6. Sub–module *glue*

Some outputs from the ***control*** are delayed one or half cycle here and fed back to the ***control***. Then this sub–module together with the ***control*** forms a state–machine. The output of the counter in the ***clock_sync*** is decoded to generate *cycle0*, *cycle1*, *cycle2* and *cycle3*. They go all over the chip so that every module is synchronized to the pixel clock. A 3–bit up–counter is used to generate *bank[2:0]* during the calibration. The *bank[2:0]* is generated in the ***control*** during the compensation. This sub–module also collects various internal signals of the ***state_mach*** and put them onto the external bus *stm_out[15:0]* through a multiplexer to increase the observability of the ***state_mach***.

2.2. Module *pre_div*

This module calculates a numerator and a denominator and gives them to the divider.

$$numerator = (fpa\_pixel - O_{cn}) * (I_{n+1} - I_n) \quad [2]$$

$$denominator = O_{cn+1} - O_{cn} \quad [3]$$

2.2. 1. Sub–module *reg_file*

This module consists of the five 16–bit registers and the control circuitry for this register file. The register file holds the calibration intensities and is accessed at *cycle2* by ***int_sub*** to calculate *delta_int* and at *cycle0* by a module ***pipe*** to preform the final addition in ***pixel_out***.

2.2. 2. Sub–module *pix_cal_sub*

Calculate $pixel\_diff = fpa\_pixel - O_{cn}$

2.2. 3. Sub–module *int_sub*

Calculate $delta\_int = I_{n+1} - I_n$

2.2. 4. Sub–module *cal_out_sub*

Calculate $denominator = O_{cn+1} - O_{cn}$

2.2. 5. Sub–module *mult*

Calculate *numerator* = *pix_diff* * *delta_int*

2.3. Module *divider*

The divider consists of three module: ***divider1***, ***divider2*** and ***overflow***. The divider performs the division of

$$q = \frac{numerator}{denominator} = \frac{(fpa\_pixel - O_{cn})(O_{cn+1} - O_{cn})}{(I_{cn+1} - I_{cn})} \qquad [4]$$

The functionalities of each modules are described below.

2.3. 1. Module *divider1*

This is the first half of the divider pipeline. The reason for the divider being spread into two is that the whole divider was too big to be logic compiled. But the size of the divider is crucial to the size of the whole chip and without logic compiling it, we could not achieve the acceptable chip size. If we spread the divider into two, then each of them could be logic compiled separately and the chip size became acceptable.

A random logic block ***probe*** consists of two 4–to–1 muxes which collect various internal signals of ***divider1*** and put them onto the external buses *divider1_out* and *divider1_out2*. These buses can be read by host at anytime through ***mem_host_if***, hence increase the observability of ***divider1***.

2.3. 2. Module *divider2*

This is the second half of the divider pipeline.

2.3. 3. Module *overflow*

This module detects an overflow of the division. Upon the occurrence of the overflow, it generates the signal, *div_ovf*, to the module ***pixel_out*** and the ***pixel_out*** sets its output to the maximum intensity value, 0xffff.

2.4. Module *pipe*

This module delays *cal_int_n* until the result of the division is available. The output is sent to the ***pixel_out*** to form the final result.

2.4. 1. Sub–module *buf_tree*

This module generates load signals for a sub–module ***shifter***.

2.4. 2. Sub–module *shifter*

This module consists of shift registers with the width of 3 and the length of 16. The index to the register file is stored here and shifted every pixel clock cycle. The output from the ***shifter*** is used to access the register file in ***pre_div/reg_file*** and the output of the register file is send to ***cal_int_n***.

2.4. 3. Sub–module *cal_int_n*

This datapath latches *cal_int_n[15:0]* from ***pre_div/reg_file*** at *cycle0* and output it at *cycle2* to synchronize with the *q[15:0]*.

2.5. Module *pixel_out*

This module performs the final addition in [5] to form the compensated output of the FPA response.

$$Pixel\_out = q + I_n = \frac{(fpa\_pixel - O_{cn})(I_{n+1} - I_n)}{O_{cn+1} - O_{cn}} + I_n \qquad [5]$$

In case of an overflow in the divider, the result is set to 0xffff. In case of a bad pixel response, the result is set to the previous value of the same row or zero if the pixel is the first element of the row.

2.6. Module *pix_counter*

The chip sees the FPA as an one–dimensional linear array and this module keeps track of which pixel is currently supplying the input by using 20–bit up–counter. This module also flags data between *End_row_in* and *Begin_row_in* as dead pixel data.

2.7. Module *frame_sync*

This module delays frame sync signals (*Beg_frame_in, Beg_row_in, End_frame_in* and *End_row_in)* until the compensated result (*Pixel_out*) is available so that the NUC outputs *Pixel_out* together with proper frame sync signals (*Beg_frame_out, Beg_row_out, End_frame_out* and *End_row_out*) to the next SP chip.

2.8. Module *mem_host_if*

This module handles interfaces to the external RAMs and to the host.

2.8. 1. Sub–module *mem_ctrl*

This sub module generates an output enable signal for the external RAMs. During the calibration mode, the chip writes to the external RAMs at cycle2. Thus the output is disabled during the cycle. During the compensation mode, the outputs from the external RAMs are always enabled.

2.8. 2. Sub–module *mem_addr*

This sub module generates a memory address(*Mem_addr*) and chip select signals (*Cs32k* and *Cs16k*) for the external RAMs. It contains various decoding circuitries to generate those signals.

2.8. 3. Sub–module *mem_data*

This sub module supplies the data to the external RAMs during calibration. Normally the data is coming out from the bad pixel detection circuitry (***state_mach/bad_pixel***), but the host can also write data

directly to the RAMs. When *host_mem_wr_en* in *control_word* is set to 1, the host has the direct control of *Mem_data[15:0]*.

2.8. 4. Sub–module *host_ctrl*

This sub module handles a handshaking between the chip and the host. When a device select signal from the host (*Dev_sel[3:0]*) matches with *Chip_id[3:0]* which are hard wired , the **NUC** pull the *Dr* low to tell the host that the **NUC** is ready for accepting a request from the host. Now the host can write/read to the internal registers of the chip. This module also contains the *control_word* register which have to be configured by the host prior to the regular operations.

2.8. 5. Sub–module *host_data*

All the data from/to the host go through this sub module. Data from the host is latched here at phase A and data to the host is muxed here. *Host_addr[4:0]* selects which data to be read by the host or which register to be written by the host.

2.8. 6. Sub–module *strob*

This module generates a write pulse to the external RAMs.

3. Signal Descriptions

Table 3.1 Pin Summary Table

Pin Name	Function	Active State	Type	Timing
Clk_in	Chip Clock		Input	Clk
Pixel_clk_in	SP clock, 4X		Input	Prop
Fpa_pixel[15:0]	Input from FPA	Data	Input	V_B
Beg_frame_in	Precede start of input frame	High	Input	V_B
Beg_row_in	Precede start of input row	High	Input	V_B
End_row_in	Precede end of input row	High	Input	V_B
End_frame_in	Precede end of input frame	High	Input	V_B
N_reset	Chip reset	Low	Input	V_B
Chip_id[3:0]	Chip identification bits	Data	Input	V_A
Dev_sel[3:0]	Device select	Data	Input	V_A, V_B
Ode	Output data enable	Low	Input	V_A, V_B
Host_addr[4:0]	Host address	Data	Input	V_A, V_B
Host_data[15:0]	Host data	Data	Input–Output	V_A, V_B
Dr	Device ready	High	Output	V_A, V_B
Mem_data[15:0]	Memory data	Data	Input–Output	V_B
Mem_addr[22:0]	Memory address	Data	Output	S_A
N_mem_we	Memory write enable	Low	Output	V_B
N_mem_oe	Memory output enable	Low	Output	V_B

Pixel_out[15:0]	Compensated *Fpa_pixel*	Data	Output	S_B
Beg_frame_out	Precede start of output frame	High	Output	S_B
Beg_row_out	Precede start of output row	High	Output	S_B
End_row_out	Precede end of output row	High	Output	S_B
End_frame_out	Precede end of output frame	High	Output	S_B
Pixel_clk_out	Synchronized *Pixel_clk_in*		Output	S_B
Cs32k[2:0]	Chip select for external rams	Low	Output	S_A
Cs16k[4:0]	Chip select for external rams	Low	Output	S_A

4. Final Notes

The compile build all in DV preparation was done in 2 passes. First 'COMPILE FORCE BUILD_ALL' was issued but the command failed at 'COMPILE LAYOUT: /divider1' due to some internal faults of genesil. Then 'COMPILE BUILD_ALL' was issued to pick up the rest of the commands including the 'COMPILE LAYOUT: /divider1'. This time all the commands were executed successfully.

To restore the database of the GT_VNUC from the DV tape, first read the compressed database by

tar xvf /dev/rst8

This creates a file called 'nuc.tar.Z'. Then uncompress it by

zcat nuc.tar.Z | tar xvpBf –

5. Block Diagrams and Schematics

All the diagrams and schematics are attached in Appendix B.

6. Pin Description

Pin#	Loc.	Signal Name	Abbrev. Name	Pad Type	Strength	Timing
1	B1					
2	C1	corner_vss	crnr_vss	VSS CORNER		
3	D1	Host_data[1]	Hdata_1	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
4	E1	Host_data[2]	Hdata_2	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
5	F1	Host_data[3]	Hdata_3	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
6	G1	Host_data[4]	Hdata_4	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
7	H1	Host_data[5]	Hdata_5	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
8	C2	Host_data[6]	Hdata_6	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
9	D2	Host_data[7]	Hdata_7	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
10	E2	Host_data[8]	Hdata_8	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
11	F2	Host_data[9]	Hdata_9	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
12	G2	Host_data[10]	Hdata_10	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
13	H2	Host_data[11]	Hdata_11	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
14	D3	Ring_vss[0]	Rvss_0	RING VSS		
15	E3	Ring_vdd[0]	Rvdd_0	RING VDD		
16	F3	Host_data[12]	Hdata_12	DATA IO	NORM/DRV2	$V_A/S_{A,B}$

18	H3	Host_data[14]	Hdata_14	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
19	E4	Host_data[15]	Hdata_15	DATA IO	NORM/DRV2	$V_A/S_{A,B}$
20	F4	Beg_frame_in	Beg_f_in	DATA IN	NORMAL	V_B
21	G4	Beg_row_in	Beg_r_in	DATA IN	NORMAL	V_B
22	H4	End_row_in	End_r_in	DATA IN	NORMAL	V_B
23	H5	End_frame_in	End_f_in	DATA IN	NORMAL	V_B
24	J4	Pixel_clk_in	Pclk_in	DATA IN	NORMAL	PROP
25	K4	core_vdd	core_vdd	CORE VDD		
26	L4	Fpa_pixel[0]	Fpain_0	DATA IN	NORMAL	V_B
27	M4	Fpa_pixel[1]	Fpain_1	DATA IN	NORMAL	V_B
28	J3	Fpa_pixel[2]	Fpain_2	DATA IN	NORMAL	V_B
29	K3	Fpa_pixel[3]	Fpain_3	DATA IN	NORMAL	V_B
30	L3	Fpa_pixel[4]	Fpain_4	DATA IN	NORMAL	V_B
31	M3	Fpa_pixel[5]	Fpain_5	DATA IN	NORMAL	V_B
32	N3	Fpa_pixel[6]	Fpain_6	DATA IN	NORMAL	V_B
33	J2	Fpa_pixel[8]	Fpain_8	DATA IN	NORMAL	V_B
34	K2	Fpa_pixel[7]	Fpain_7	DATA IN	NORMAL	V_B
35	L2	Ring_vdd[1]	Rvdd_1	RING VDD		
36	M2	Ring_vss[1]	Rvss_1	RING VSS		
37	N2	Fpa_pixel[10]	Fpain_10	DATA IN	NORMAL	V_B
38	P2	Fpa_pixel[9]	Fpain_9	DATA IN	NORMAL	V_B
39	J1					
40	K1	Fpa_pixel[11]	Fpain_11	DATA IN	NORMAL	V_B
41	L1					
42	M1					
43	N1					
44	P1					
45	Q1					
46	M5					
47	M6					
48	M7	corner_vdd[0]	crnr_vdd	CORNER VDD		
49	Q2					
50	Q3	Fpa_pixel[12]	Fpain_12	DATA IN	NORMAL	V_B
51	Q4	Fpa_pixel[13]	Fpain_13	DATA IN	NORMAL	V_B
52	Q5	Fpa_pixel[14]	Fpain_14	DATA IN	NORMAL	V_B
53	Q6	Fpa_pixel[15]	Fpain_15	DATA IN	NORMAL	V_B
54	Q7	Mem_data[0]	Mdata_0	DATA IO	NORM/DRV2	V_B/S_A
55	P3	Mem_data[1]	Mdata_1	DATA IO	NORM/DRV2	V_B/S_A
56	P4	Mem_data[2]	Mdata_2	DATA IO	NORM/DRV2	V_B/S_A
57	P5	Mem_data[3]	Mdata_3	DATA IO	NORM/DRV2	V_B/S_A
58	P6	Mem_data[4]	Mdata_4	DATA IO	NORM/DRV2	V_B/S_A
59	P7	Mem_data[5]	Mdata_5	DATA IO	NORM/DRV2	V_B/S_A
60	N4	Mem_data[6]	Mdata_6	DATA IO	NORM/DRV2	V_B/S_A
61	N5	Mem_data[7]	Mdata_7	DATA IO	NORM/DRV2	V_B/S_A
62	N6	Mem_data[8]	Mdata_8	DATA IO	NORM/DRV2	V_B/S_A
63	N7	Mem_data[9]	Mdata_9	DATA IO	NORM/DRV2	V_B/S_A
64	M8	Mem_data[10]	Mdata_10	DATA IO	NORM/DRV2	V_B/S_A
65	M9	Mem_data[11]	Mdata_11	DATA IO	NORM/DRV2	V_B/S_A
66	M10	Ring_vss[2]	Rvss_2	RING VSS		
67	M11	Ring_vdd[2]	Rvdd_2	RING VSS		
68	L8	Mem_data[12]	Mdata_12	DATA IO	NORM/DRV2	V_B/S_A

69	M12					
70	N8	Mem_data[13]	Mdata_13	DATA IO	NORM/DRV2	V_B/S_A
71	N9	Mem_data[14]	Mdata_14	DATA IO	NORM/DRV2	V_B/S_A
72	N10	Mem_data[15]	Mdata_15	DATA IO	NORM/DRV2	V_B/S_A
73	N11	N_we	N_we	DATA OUT	DRVSPEED2	V_B
74	N12	N_oe	N_oe	DATA OUT	DRVSPEED2	S_A
75	N13	Mem_addr[0]	Maddr_0	DATA OUT	DRVSPEED3	S_A
76	P8	Mem_addr[1]	Maddr_1	DATA OUT	DRVSPEED3	S_A
77	P9	Ring_vss[3]	Rvss_3	RING VSS		
78	P10	Mem_addr[2]	Maddr_2	DATA OUT	DRVSPEED3	S_A
79	P11	Mem_addr[3]	Maddr_3	DATA OUT	DRVSPEED3	S_A
80	P12	Ring_vdd[3]	Rvdd_3	RING VDD		
81	P13	Mem_addr[5]	Maddr_5	DATA OUT	DRVSPEED3	S_A
82	P14	Mem_addr[4]	Maddr_4	DATA OUT	DRVSPEED3	S_A
83	Q8	Mem_addr[7]	Maddr_7	DATA OUT	DRVSPEED3	S_A
84	Q9	Mem_addr[6]	Maddr_6	DATA OUT	DRVSPEED3	S_A
85	Q10	Ring_vss[4]	Rvss_4	RING VSS		
86	Q11	Mem_addr[8]	Maddr_8	DATA OUT	DRVSPEED3	S_A
87	Q12					
88	Q13	Ring_vdd[4]	Rvdd_4	RING VSS		
89	Q14					
90	Q15					
91	P15					
92	N15					
93	M15					
94	L15	Mem_addr[10]	Maddr_10	DATA OUT	DRVSPEED3	S_A
95	K15	Mem_addr[9]	Maddr_9	DATA OUT	DRVSPEED3	S_A
96	J15	Mem_addr[12]	Maddr_12	DATA OUT	DRVSPEED3	S_A
97	H15	Mem_addr[11]	Maddr_11	DATA OUT	DRVSPEED3	S_A
98	N14	Mem_addr[14]	Maddr_14	DATA OUT	DRVSPEED3	S_A
99	M14	Mem_addr[13]	Maddr_13	DATA OUT	DRVSPEED3	S_A
100	L14	Ring_vdd[5]	Rvdd_5	RING VDD		
101	K14	Ring_vss[5]	Rvss_5	RING VSS		
102	J14	Mem_addr[16]	Maddr_16	DATA OUT	DRVSPEED3	S_A
103	H14	Mem_addr[15]	Maddr_15	DATA OUT	DRVSPEED3	S_A
104	M13	Mem_addr[18]	Maddr_18	DATA OUT	DRVSPEED3	S_A
105	L13	Mem_addr[17]	Maddr_17	DATA OUT	DRVSPEED3	S_A
106	K13	Mem_addr[19]	Maddr_19	DATA OUT	DRVSPEED3	S_A
107	J13	Mem_addr[20]	Maddr_20	DATA OUT	DRVSPEED3	S_A
108	H13	Ring_vss[6]	Rvss_6	RING VSS		
109	L12	Ring_vdd[6]	Rvdd_6	RING VDD		
110	K12	Mem_addr[21]	Maddr_21	DATA OUT	DRVSPEED3	S_A
111	J12	Mem_addr[22]	Maddr_22	DATA OUT	DRVSPEED3	S_A
112	H12	core_vss	core_vss	CORE VSS		
113	H11	Cs16k[0]	Cs16k_0	DATA OUT	DRVSPEED3	S_A
114	G12	Cs16k[1]	Cs16k_1	DATA OUT	DRVSPEED3	S_A
115	F12	Cs16k[2]	Cs16k_2	DATA OUT	DRVSPEED3	S_A
116	E12	Cs16k[3]	Cs16k_3	DATA OUT	DRVSPEED3	S_A
117	D12	Ring_vss[7]	Rvss_7	RING VSS		
118	G13	Ring_vdd[7]	Rvdd_7	RING VDD		
119	F13	Cs16k[4]	Cs16k_4	DATA OUT	DRVSPEED3	S_A

120	E13	Cs32k[0]	Cs32k_0	DATA OUT	DRVSPEED3	S_A
121	D13	Cs32k[1]	Cs32k_1	DATA OUT	DRVSPEED3	S_A
122	C13	Cs32k[2]	Cs32k_2	DATA OUT	DRVSPEED3	S_A
123	G14	N_reset	N_reset	DATA IN	NORMAL	V_A,V_B
124	F14	Pixel_out[0]	Pout_0	DATA OUT	DRVSPEED2	S_B
125	E14	Ring_vdd[10]	Rvdd_10	RING VDD		
126	D14	Ring_vss[10]	Rvss_10	RING VSS		
127	C14	Chip_id[0]	Chip_id0	DATA IN	NORMAL	V_A
128	B14	Chip_id[1]	Chip_id1	DATA IN	NORMAL	V_A
129	G15	Chip_id[2]	Chip_id2	DATA IN	NORMAL	V_A
130	F15	Chip_id[3]	Chip_id3	DATA IN	NORMAL	V_A
131	E15					
132	D15					
133	C15					
134	B15					
135	A15					
136	D11	corner_vdd[1]	crnr_vdd	CORNER VDD		
137	D10					
138	D9	Pixel_out[1]	Pout_1	DATA OUT	DRVSPEED2	S_B
139	A14					
140	A13	Pixel_out[3]	Pout_3	DATA OUT	DRVSPEED2	S_B
141	A12	Pixel_out[2]	Pout_2	DATA OUT	DRVSPEED2	S_B
142	A11	Pixel_out[5]	Pout_5	DATA OUT	DRVSPEED2	S_B
143	A10	Pixel_out[4]	Pout_4	DATA OUT	DRVSPEED2	S_B
144	A9	Pixel_out[6]	Pout_6	DATA OUT	DRVSPEED2	S_B
145	B13	Pixel_out[7]	Pout_7	DATA OUT	DRVSPEED2	S_B
146	B12	Pixel_out[8]	Pout_8	DATA OUT	DRVSPEED2	S_B
147	B11	Pixel_out[9]	Pout_9	DATA OUT	DRVSPEED2	S_B
148	B10	Pixel_out[10]	Pout_10	DATA OUT	DRVSPEED2	S_B
149	B9	Ring_vss[9]	Rvss_9	RING VSS		
150	C12	Ring_vdd[9]	Rvdd_9	RING VDD		
151	C11	Pixel_out[11]	Pout_11	DATA OUT	DRVSPEED2	S_B
152	C10	Pixel_out[12]	Pout_12	DATA OUT	DRVSPEED2	S_B
153	C9	Pixel_out[13]	Pout_13	DATA OUT	DRVSPEED2	S_B
154	D8	Pixel_out[14]	Pout_14	DATA OUT	DRVSPEED2	S_B
155	D7	Pixel_out[15]	Pout_15	DATA OUT	DRVSPEED2	S_B
156	D6	clk_pad_vcc	clk_vdd	CLK VDD		
157	D5	clk_pad_vss	clk_vss	CLK VSS		
158	E8	clk_pad_clk	clk	CLK		
159	D4					
160	C8	Pixel_clk_out	Pclk_out	DATA OUT	DRVSPEED2	S_B
161	C7	Beg_frame_out	B_f_out	DATA OUT	DRVSPEED2	S_B
162	C6	Beg_row_out	B_r_out	DATA OUT	DRVSPEED2	S_B
163	C5	End_row_out	E_r_out	DATA OUT	DRVSPEED2	S_B
164	C4	End_frame_out	E_f_out	DATA OUT	DRVSPEED2	S_B
165	C3	Dev_sel[0]	Dev_sel0	DATA IN	NORMAL	V_A,V_B
166	B8	Dev_sel[1]	Dev_sel1	DATA IN	NORMAL	V_A,V_B
167	B7	Dev_sel[2]	Dev_sel2	DATA IN	NORMAL	V_A,V_B
168	B6	Dev_sel[3]	Dev_sel3	DATA IN	NORMAL	V_A,V_B
169	B5	Host_addr[4]	Haddr_4	DATA IN	NORMAL	V_A,V_B
170	B4	Host_addr[3]	Haddr_3	DATA IN	NORMAL	V_A,V_B

171	B3	Host_addr[2]	Haddr_2	DATA IN	NORMAL	V_A,V_B
172	B2	Host_addr[1]	Haddr_1	DATA IN	NORMAL	V_A,V_B
173	A8	Ring_vss[8]	Rvss_8	RING VSS		
174	A7	Ring_vdd[8]	Rvdd_8	RING VDD		
175	A6	Host_addr[0]	Haddr_0	DATA IN	NORMAL	V_A,V_B
176	A5	Dr	Dr	DATA IN	DRVSPEED2	S_A,S_B
177	A4	Ode	Ode	DATA IN	NORMAL	V_A,V_B
178	A3	Host_data[0]	Hdata_0	DATA IO	NORM/DRV2	V_A/$S_{A,B}$
179	A2					
180	A1					

7. Key Parameters

```
)
) Key Parameters for Chip /mntb/nuc/nuc/gt_nuc/nuc
) ================================================================================
)
) TIME = Thu May 30 14:51:39 1991
)
) ROUTE_VERSION = 8.00
) HEIGHT = 399.2 MILS
)    ( = 10139.6 u )
) WIDTH = 403.2 MILS
)    ( = 10241.2 u )
) ROUTED = 1 (0=NO,1=YES)
) TOTAL_WIRE_LENGTH = 1324581 MILS
)    ( = 33644357. u )
) CORE_AREA = 125560.2 SQUARE_MILS
)    ( = 81006422.1 u2 )
) PADRING_AREA = 35382.1 SQUARE_MILS
)    ( = 22827117. u2 )
) PAD_AREA = 27829.2 SQUARE_MILS
)    ( = 17954286. u2 )
) ROUTE_AREA = 62035.6 SQUARE_MILS
)    ( = 40022889. u2 )
) PERCENT_ROUTING_OF_CORE = 49 %
) PERCENT_ROUTING_OF_CHIP = 38 %
) PERCENT_CORE_OF_CHIP = 78 %
) PERCENT_PADRING_OF_CHIP = 21 %
) PERCENT_PAD_OF_PADRING = 78 %
)
) NETLIST_VERSION = 2.0
) NETLIST_EXISTS = 1 (0=NO,1=YES)
)
) PHASE_A_TIME = 35.4 NANOSECONDS
) PHASE_B_TIME = 36.2 NANOSECONDS
) SYMMETRIC_TIME = 74.2 NANOSECONDS
)
)
) ROUTE_ESTIMATE_LVL = 0
) FLAT_ROUTE = 0 (0=NO,1=YES)
) TECHNOLOGY_NAME = CMOS-1
) PACKAGE_SPECIFIED = 1 (0=NO,1=YES)
) PACKAGE_NAME = CPGA180f
) FABLINE_NAME = HP2_CN10B
) COMPILER_TYPE = GCX
)
) FLOORPLAN_VERSION = 8.0
```

```
) BOND_PAD_CNT = 153
) HEIGHT_ESTIMATE = 433.52 MILS
)    ( = 11011.40 u )
) WIDTH_ESTIMATE = 440.53 MILS
)    ( = 11189.46 u )
) FUSED = 1 (0=NO,1=YES)
) FUSION_REQUIRED = 1 (0=NO,1=YES)
) PINOUT = 1 (0=NO,1=YES)
) PINOUT_REQUIRED = 1 (0=NO,1=YES)
) PLACED = 1 (0=NO,1=YES)
) PLACEMENT_REQUIRED = 1 (0=NO,1=YES)
)
)
) DOWN_BONDS_ALLOWED = 1 (0=NO,1=YES)
) PKG_PIN_COUNT = 180
) PKG_WELL_HEIGHT = 472.00 MILS
)    ( = 11988.80 u )
) PKG_WELL_WIDTH = 472.00 MILS
)    ( = 11988.80 u )
) AREA = 160957.4 SQUARE_MILS
)    ( = 103843282. u2 )
) OBJECT_TYPE = Chip
) PHYSICAL_IMPLEMENTATIONS_EXIST = 0 (0=NO,1=YES)
) CHECKPOINTS_EXIST = 0 (0=NO,1=YES)
) CAN_SET_FABLINE = 1 (0=NO,1=YES)
)
) Key Parameter Listing Complete
```

8. PADRING.033

OUTPUT RINGS REPORT Version 1

Noise contribution:(ma/nh) Speed0: 2.50 Speed1: 5.00 Speed2: 8.33 Speed3: 16.66
Limits: Maximum noise level: 100. Unacceptable level: 150

Combined power pads do not supply clean power to the core.
Their use is discouraged

Ring under analysis: VDD

PAD NAME	EDGE	SPEED	DRIVE TYPE	PAD SUPPLY	COMMENT
Pixel_out[15]	SOUTH	2	CMOS	1	OK
Pixel_out[14]	SOUTH	2	CMOS	1	OK
Pixel_out[13]	SOUTH	2	CMOS	1	OK
Pixel_out[12]	SOUTH	2	CMOS	1	OK
Pixel_out[11]	SOUTH	2	CMOS	1	OK
Ring_vdd[9]	SOUTH		POWER		
Pixel_out[10]	SOUTH	2	CMOS	1	OK
Pixel_out[9]	SOUTH	2	CMOS	1	OK
Pixel_out[8]	SOUTH	2	CMOS	1	OK
Pixel_out[7]	SOUTH	2	CMOS	1	OK
Pixel_out[6]	SOUTH	2	CMOS	1	OK
Pixel_out[5]	SOUTH	2	CMOS	3	OK
Pixel_out[4]	SOUTH	2	CMOS	3	OK
Pixel_out[3]	SOUTH	2	CMOS	2	OK
Pixel_out[2]	SOUTH	2	CMOS	2	OK
Pixel_out[1]	SOUTH	2	CMOS	2	OK
corner_vdd[1]	SOUTH		POWER		

Ring_vdd[10]	WEST		POWER		
Pixel_out[0]	WEST	2	CMOS	2	OK
Cs32k[2]	WEST	3	CMOS	2	OK
Cs32k[1]	WEST	3	CMOS	3	OK
Cs32k[0]	WEST	3	CMOS	3	OK
Cs16k[4]	WEST	3	CMOS	1	OK
Ring_vdd[7]	WEST		POWER		
Cs16k[3]	WEST	3	CMOS	1	OK
Cs16k[2]	WEST	3	CMOS	1	OK
Cs16k[1]	WEST	3	CMOS	1	OK
Cs16k[0]	WEST	3	CMOS	1	OK
Mem_addr[22]	WEST	3	CMOS	1	OK
Mem_addr[21]	WEST	3	CMOS	1	OK
Ring_vdd[6]	WEST		POWER		
Mem_addr[20]	WEST	3	CMOS	1	OK
Mem_addr[19]	WEST	3	CMOS	1	OK
Mem_addr[18]	WEST	3	CMOS	1	OK
Mem_addr[17]	WEST	3	CMOS	1	OK
Mem_addr[16]	WEST	3	CMOS	1	OK
Mem_addr[15]	WEST	3	CMOS	1	OK
Ring_vdd[5]	WEST		POWER		
Mem_addr[14]	WEST	3	CMOS	1	OK
Mem_addr[13]	WEST	3	CMOS	1	OK
Mem_addr[12]	WEST	3	CMOS	1	OK
Mem_addr[11]	WEST	3	CMOS	1	OK
Mem_addr[10]	WEST	3	CMOS	1	OK
Mem_addr[9]	WEST	3	CMOS	1	OK
Ring_vdd[4]	NORTH		POWER		
Mem_addr[8]	NORTH	3	CMOS	1	OK
Mem_addr[7]	NORTH	3	CMOS	1	OK
Mem_addr[6]	NORTH	3	CMOS	1	OK
Mem_addr[5]	NORTH	3	CMOS	1	OK
Mem_addr[4]	NORTH	3	CMOS	1	OK
Mem_addr[3]	NORTH	3	CMOS	1	OK
Ring_vdd[3]	NORTH		POWER		
Mem_addr[2]	NORTH	3	CMOS	1	OK
Mem_addr[1]	NORTH	3	CMOS	1	OK
Mem_addr[0]	NORTH	3	CMOS	1	OK
N_oe	NORTH	2	CMOS	1	OK
N_we	NORTH	2	CMOS	1	OK
Mem_data[15]	NORTH	2	CMOS	1	OK
Mem_data[14]	NORTH	2	CMOS	1	OK
Mem_data[13]	NORTH	2	CMOS	1	OK
Mem_data[12]	NORTH	2	CMOS	1	OK
Ring_vdd[2]	NORTH		POWER		
Mem_data[11]	NORTH	2	CMOS	1	OK
Mem_data[10]	NORTH	2	CMOS	1	OK
Mem_data[9]	NORTH	2	CMOS	1	OK
Mem_data[8]	NORTH	2	CMOS	1	OK
Mem_data[7]	NORTH	2	CMOS	1	OK
Mem_data[6]	NORTH	2	CMOS	1	OK
Mem_data[5]	NORTH	2	CMOS	2	OK
Mem_data[4]	NORTH	2	CMOS	2	OK
Mem_data[3]	NORTH	2	CMOS	2	OK
Mem_data[2]	NORTH	2	CMOS	2	OK
Mem_data[1]	NORTH	2	CMOS	3	OK
Mem_data[0]	NORTH	2	CMOS	3	OK
corner_vdd[0]	NORTH		POWER		
Ring_vdd[1]	EAST		POWER		
Host_data[15]	EAST	2	CMOS	3	OK

Host_data[14]	EAST	2	CMOS	3	OK
Host_data[13]	EAST	2	CMOS	3	OK
Host_data[12]	EAST	2	CMOS	3	OK
Ring_vdd[0]	EAST		POWER		
Host_data[11]	EAST	2	CMOS	3	OK
Host_data[10]	EAST	2	CMOS	3	OK
Host_data[9]	EAST	2	CMOS	1	OK
Host_data[8]	EAST	2	CMOS	1	OK
Host_data[7]	EAST	2	CMOS	1	OK
Host_data[6]	EAST	2	CMOS	1	OK
Host_data[5]	EAST	2	CMOS	1	OK
Host_data[4]	EAST	2	CMOS	1	OK
Host_data[3]	EAST	2	CMOS	1	OK
Host_data[2]	EAST	2	CMOS	1	OK
Host_data[1]	EAST	2	CMOS	1	OK
Host_data[0]	SOUTH	2	CMOS	1	OK
Dr	SOUTH	2	CMOS	1	OK
Ring_vdd[8]	SOUTH		POWER		
End_frame_out	SOUTH	2	CMOS	1	OK
End_row_out	SOUTH	2	CMOS	1	OK
Beg_row_out	SOUTH	2	CMOS	1	OK
Beg_frame_out	SOUTH	2	CMOS	1	OK
Pixel_clk_out	SOUTH	2	CMOS	1	OK

This ring has 3 more VDD pads than it needs
Ring under analysis: VSS

PAD NAME	EDGE	SPEED	DRIVE	PAD TYPE	SUPPLY	COMMENT
Pixel_out[15]	SOUTH	2	CMOS		1	OK
Pixel_out[14]	SOUTH	2	CMOS		1	OK
Pixel_out[13]	SOUTH	2	CMOS		1	OK
Pixel_out[12]	SOUTH	2	CMOS		1	OK
Pixel_out[11]	SOUTH	2	CMOS		1	OK
Ring_vss[9]	SOUTH		POWER			
Pixel_out[10]	SOUTH	2	CMOS		1	OK
Pixel_out[9]	SOUTH	2	CMOS		1	OK
Pixel_out[8]	SOUTH	2	CMOS		1	OK
Pixel_out[7]	SOUTH	2	CMOS		1	OK
Pixel_out[6]	SOUTH	2	CMOS		1	OK
Pixel_out[5]	SOUTH	2	CMOS		2	OK
Pixel_out[4]	SOUTH	2	CMOS		2	OK
Pixel_out[3]	SOUTH	2	CMOS		1	OK
Pixel_out[2]	SOUTH	2	CMOS		1	OK
Pixel_out[1]	SOUTH	2	CMOS		1	OK
Ring_vss[10]	WEST		POWER			
Pixel_out[0]	WEST	2	CMOS		1	OK
Cs32k[2]	WEST	3	CMOS		1	OK
Cs32k[1]	WEST	3	CMOS		2	OK
Cs32k[0]	WEST	3	CMOS		2	OK
Cs16k[4]	WEST	3	CMOS		1	OK
Ring_vss[7]	WEST		POWER			
Cs16k[3]	WEST	3	CMOS		1	OK
Cs16k[2]	WEST	3	CMOS		1	OK
Cs16k[1]	WEST	3	CMOS		1	OK
Cs16k[0]	WEST	3	CMOS		1	OK
Mem_addr[22]	WEST	3	CMOS		1	OK
Mem_addr[21]	WEST	3	CMOS		1	OK
Ring_vss[6]	WEST		POWER			

Mem_addr[20]	WEST	3	CMOS	1	OK
Mem_addr[19]	WEST	3	CMOS	1	OK
Mem_addr[18]	WEST	3	CMOS	1	OK
Mem_addr[17]	WEST	3	CMOS	1	OK
Mem_addr[16]	WEST	3	CMOS	1	OK
Mem_addr[15]	WEST	3	CMOS	1	OK
Ring_vss[5]	WEST		POWER		
Mem_addr[14]	WEST	3	CMOS	1	OK
Mem_addr[13]	WEST	3	CMOS	1	OK
Mem_addr[12]	WEST	3	CMOS	1	OK
Mem_addr[11]	WEST	3	CMOS	1	OK
Mem_addr[10]	WEST	3	CMOS	1	OK
Mem_addr[9]	WEST	3	CMOS	1	OK
Ring_vss[4]	NORTH		POWER		
Mem_addr[8]	NORTH	3	CMOS	1	OK
Mem_addr[7]	NORTH	3	CMOS	1	OK
Mem_addr[6]	NORTH	3	CMOS	1	OK
Mem_addr[5]	NORTH	3	CMOS	1	OK
Mem_addr[4]	NORTH	3	CMOS	1	OK
Mem_addr[3]	NORTH	3	CMOS	1	OK
Ring_vss[3]	NORTH		POWER		
Mem_addr[2]	NORTH	3	CMOS	1	OK
Mem_addr[1]	NORTH	3	CMOS	1	OK
Mem_addr[0]	NORTH	3	CMOS	1	OK
N_oe	NORTH	2	CMOS	1	OK
N_we	NORTH	2	CMOS	1	OK
Mem_data[15]	NORTH	2	CMOS	1	OK
Mem_data[14]	NORTH	2	CMOS	1	OK
Mem_data[13]	NORTH	2	CMOS	1	OK
Mem_data[12]	NORTH	2	CMOS	1	OK
Ring_vss[2]	NORTH		POWER		
Mem_data[11]	NORTH	2	CMOS	1	OK
Mem_data[10]	NORTH	2	CMOS	1	OK
Mem_data[9]	NORTH	2	CMOS	1	OK
Mem_data[8]	NORTH	2	CMOS	1	OK
Mem_data[7]	NORTH	2	CMOS	1	OK
Mem_data[6]	NORTH	2	CMOS	1	OK
Mem_data[5]	NORTH	2	CMOS	1	OK
Mem_data[4]	NORTH	2	CMOS	1	OK
Mem_data[3]	NORTH	2	CMOS	1	OK
Mem_data[2]	NORTH	2	CMOS	1	OK
Mem_data[1]	NORTH	2	CMOS	2	OK
Mem_data[0]	NORTH	2	CMOS	2	OK
Ring_vss[1]	EAST		POWER		
Host_data[15]	EAST	2	CMOS	2	OK
Host_data[14]	EAST	2	CMOS	2	OK
Host_data[13]	EAST	2	CMOS	2	OK
Host_data[12]	EAST	2	CMOS	2	OK
Ring_vss[0]	EAST		POWER		
Host_data[11]	EAST	2	CMOS	2	OK
Host_data[10]	EAST	2	CMOS	2	OK
Host_data[9]	EAST	2	CMOS	1	OK
Host_data[8]	EAST	2	CMOS	1	OK
Host_data[7]	EAST	2	CMOS	1	OK
Host_data[6]	EAST	2	CMOS	2	OK
Host_data[5]	EAST	2	CMOS	2	OK
Host_data[4]	EAST	2	CMOS	2	OK
Host_data[3]	EAST	2	CMOS	2	OK
Host_data[2]	EAST	2	CMOS	2	OK

```
Host_data[1]    EAST    2  CMOS      2   OK
corner_vss      EAST       POWER

Host_data[0]    SOUTH   2  CMOS      2   OK
Dr              SOUTH   2  CMOS      2   OK
Ring_vss[8]     SOUTH      POWER
End_frame_out   SOUTH   2  CMOS      2   OK
End_row_out     SOUTH   2  CMOS      2   OK
Beg_row_out     SOUTH   2  CMOS      2   OK
Beg_frame_out   SOUTH   2  CMOS      2   OK
Pixel_clk_out   SOUTH   2  CMOS      1   OK

This ring has 2 more VSS pads than it needs
```

9. Power Dissipation

```
) Clock Clk_in [clock=-9999]
) Reading Routing Data . . .
) INFO: longest net delay: 17.0ns
)    Nets with delay longer than 10.0ns are recorded in ancilLary file LONG_NET STD
) INFO: Nets loading, driving information can be found in ancillary file TA_NET STD
) Back-annotating route capacitance for block power calculation. . .
)  Power for block math/strob: 0.00mW(DC) 0.89mW(AC)
)  Power for block math/state_mach/subtract: 0.00mW(DC) 3.40mW(AC)
)  Power for block math/state_mach/glue: 0.00mW(DC) 22.85mW(AC)
) W: Node math/state_mach/control/n[2] is not routed
)  Power for block math/state_mach/control: 0.00mW(DC) 2.07mW(AC)
)  Power for block math/state_mach/clock_sync: 0.00mW(DC) 1.50mW(AC)
)  Power for block math/state_mach/cal_out_gen: 0.00mW(DC) 31.08mW(AC)
) W: Node math/state_mach/bad_pixel/sel_pixelin/ADDSUB1_COUT is not routed
) W: Node math/state_mach/bad_pixel/sel_pixelin/PORT7_EXT1[16] is not routed
)  Power for block math/state_mach/bad_pixel/sel_pixelin: 0.00mW(DC) 2.42mW(AC)
)  Power for block math/state_mach/bad_pixel/control: 4.50mW(DC) 0.58mW(AC)
)  Power for block math/pre_div/reg_file/reg_sel: 0.00mW(DC) 1.86mW(AC)
)  Power for block math/pre_div/reg_file/reg: 0.00mW(DC) 4.45mW(AC)
)  Power for block math/pre_div/pix_cal_sub: 0.00mW(DC) 6.77mW(AC)
)  Power for block math/pre_div/mult/mult_out: 0.00mW(DC) 21.84mW(AC)
)  Power for block math/pre_div/mult/mult_block/mult1: 0.00mW(DC) 14.58mW(AC)
)  Power for block math/pre_div/mult/mult_block/mult0: 0.00mW(DC) 15.13mW(AC)
)  Power for block math/pre_div/mult/mult_block/ms_add1: 0.00mW(DC) 3.68mW(AC)
)  Power for block math/pre_div/mult/mult_block/ms_add0: 0.00mW(DC) 3.62mW(AC)
)  Power for block math/pre_div/mult/mult_block/gate_m1: 0.00mW(DC) 3.44mW(AC)
)  Power for block math/pre_div/mult/mult_block/gate_m0: 0.00mW(DC) 3.41mW(AC)
)  Power for block math/pre_div/mult/mult_block/final_add: 0.00mW(DC) 6.38mW(AC)
)  Power for block math/pre_div/int_sub: 0.00mW(DC) 4.34mW(AC)
)  Power for block math/pre_div/cal_out_sub: 0.00mW(DC) 5.45mW(AC)
)  Power for block math/pixel_out/datapath: 0.00mW(DC) 3.67mW(AC)
)  Power for block math/pixel_out/control: 0.00mW(DC) 0.14mW(AC)
)  Power for block math/pix_counter: 0.00mW(DC) 16.34mW(AC)
)  Power for block math/pipe/shifter: 0.00mW(DC) 6.02mW(AC)
)  Power for block math/pipe/cal_int_n: 0.00mW(DC) 4.51mW(AC)
)  Power for block math/pipe/buf_tree: 0.00mW(DC) 0.56mW(AC)
)  Power for block math/overflow: 0.00mW(DC) 8.31mW(AC)
)  Power for block math/mem_host_if: 0.00mW(DC) 58.97mW(AC)
)  Power for block math/frame_sync: 0.00mW(DC) 38.82mW(AC)
)  Power for block math/divider2: 0.00mW(DC) 153.65mW(AC)
)  Power for block math/divider1: 0.00mW(DC) 190.09mW(AC)
)  Power for block corner_vss: 0.00mW(DC) 0.00mW(AC)
)  Power for block corner_vdd: 0.00mW(DC) 0.00mW(AC)
)  Power for block corner_test: 0.00mW(DC) 0.12mW(AC)
```

```
)  Power for block core_vss: 0.00mW(DC) 0.00mW(AC)
)  Power for block core_vdd: 0.00mW(DC) 0.00mW(AC)
)  Power for block clk_pad: 0.00mW(DC) 33.88mW(AC)
)  Power for block Ring_vss: 0.00mW(DC) 0.00mW(AC)
)  Power for block Ring_vdd: 0.00mW(DC) 0.00mW(AC)
)  Power for block Pixel_out[9]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[8]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[7]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[6]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[5]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[4]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[3]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[2]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[1]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[15]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[14]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[13]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[12]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[11]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[10]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_out[0]: 0.00mW(DC) 4.26mW(AC)
)  Power for block Pixel_clk_out: 0.00mW(DC) 4.50mW(AC)
)  Power for block Pixel_clk_in: 0.00mW(DC) 0.22mW(AC)
)  Power for block Ode: 0.00mW(DC) 0.54mW(AC)
)  Power for block N_we: 0.00mW(DC) 4.26mW(AC)
)  Power for block N_reset: 0.00mW(DC) 0.91mW(AC)
)  Power for block N_oe: 0.00mW(DC) 4.26mW(AC)
)  Power for block Mem_data[9]: 0.00mW(DC) 4.56mW(AC)
)  Power for block Mem_data[8]: 0.00mW(DC) 4.63mW(AC)
)  Power for block Mem_data[7]: 0.00mW(DC) 4.58mW(AC)
)  Power for block Mem_data[6]: 0.00mW(DC) 4.63mW(AC)
)  Power for block Mem_data[5]: 0.00mW(DC) 4.60mW(AC)
)  Power for block Mem_data[4]: 0.00mW(DC) 4.64mW(AC)
)  Power for block Mem_data[3]: 0.00mW(DC) 4.68mW(AC)
)  Power for block Mem_data[2]: 0.00mW(DC) 4.67mW(AC)
)  Power for block Mem_data[1]: 0.00mW(DC) 4.70mW(AC)
)  Power for block Mem_data[15]: 0.00mW(DC) 4.62mW(AC)
)  Power for block Mem_data[14]: 0.00mW(DC) 4.58mW(AC)
)  Power for block Mem_data[13]: 0.00mW(DC) 4.58mW(AC)
)  Power for block Mem_data[12]: 0.00mW(DC) 4.59mW(AC)
)  Power for block Mem_data[11]: 0.00mW(DC) 4.57mW(AC)
)  Power for block Mem_data[10]: 0.00mW(DC) 4.57mW(AC)
)  Power for block Mem_data[0]: 0.00mW(DC) 4.69mW(AC)
)  Power for block Mem_addr[9]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[8]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[7]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[6]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[5]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[4]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[3]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[2]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[22]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[21]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[20]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[1]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[19]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[18]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[17]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[16]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[15]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[14]: 0.00mW(DC) 4.50mW(AC)
)  Power for block Mem_addr[13]: 0.00mW(DC) 4.50mW(AC)
```

```
)  Power for block Mem_addr[12]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Mem_addr[11]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Mem_addr[10]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Mem_addr[0]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Host_data[9]: 0.00mW(DC)  4.80mW(AC)
)  Power for block Host_data[8]: 0.00mW(DC)  4.79mW(AC)
)  Power for block Host_data[7]: 0.00mW(DC)  4.81mW(AC)
)  Power for block Host_data[6]: 0.00mW(DC)  4.79mW(AC)
)  Power for block Host_data[5]: 0.00mW(DC)  4.81mW(AC)
)  Power for block Host_data[4]: 0.00mW(DC)  4.81mW(AC)
)  Power for block Host_data[3]: 0.00mW(DC)  4.84mW(AC)
)  Power for block Host_data[2]: 0.00mW(DC)  4.84mW(AC)
)  Power for block Host_data[1]: 0.00mW(DC)  4.86mW(AC)
)  Power for block Host_data[15]: 0.00mW(DC)  4.75mW(AC)
)  Power for block Host_data[14]: 0.00mW(DC)  4.77mW(AC)
)  Power for block Host_data[13]: 0.00mW(DC)  4.75mW(AC)
)  Power for block Host_data[12]: 0.00mW(DC)  4.79mW(AC)
)  Power for block Host_data[11]: 0.00mW(DC)  4.78mW(AC)
)  Power for block Host_data[10]: 0.00mW(DC)  4.79mW(AC)
)  Power for block Host_data[0]: 0.00mW(DC)  4.88mW(AC)
)  Power for block Host_addr[4]: 0.00mW(DC)  0.51mW(AC)
)  Power for block Host_addr[3]: 0.00mW(DC)  0.51mW(AC)
)  Power for block Host_addr[2]: 0.00mW(DC)  0.52mW(AC)
)  Power for block Host_addr[1]: 0.00mW(DC)  0.52mW(AC)
)  Power for block Host_addr[0]: 0.00mW(DC)  0.56mW(AC)
)  Power for block Fpa_pixel[9]: 0.00mW(DC)  0.26mW(AC)
)  Power for block Fpa_pixel[8]: 0.00mW(DC)  0.26mW(AC)
)  Power for block Fpa_pixel[7]: 0.00mW(DC)  0.25mW(AC)
)  Power for block Fpa_pixel[6]: 0.00mW(DC)  0.25mW(AC)
)  Power for block Fpa_pixel[5]: 0.00mW(DC)  0.23mW(AC)
)  Power for block Fpa_pixel[4]: 0.00mW(DC)  0.23mW(AC)
)  Power for block Fpa_pixel[3]: 0.00mW(DC)  0.23mW(AC)
)  Power for block Fpa_pixel[2]: 0.00mW(DC)  0.23mW(AC)
)  Power for block Fpa_pixel[1]: 0.00mW(DC)  0.22mW(AC)
)  Power for block Fpa_pixel[15]: 0.00mW(DC)  0.31mW(AC)
)  Power for block Fpa_pixel[14]: 0.00mW(DC)  0.32mW(AC)
)  Power for block Fpa_pixel[13]: 0.00mW(DC)  0.33mW(AC)
)  Power for block Fpa_pixel[12]: 0.00mW(DC)  0.34mW(AC)
)  Power for block Fpa_pixel[11]: 0.00mW(DC)  0.29mW(AC)
)  Power for block Fpa_pixel[10]: 0.00mW(DC)  0.29mW(AC)
)  Power for block Fpa_pixel[0]: 0.00mW(DC)  0.24mW(AC)
)  Power for block End_row_out: 0.00mW(DC)  4.26mW(AC)
)  Power for block End_row_in: 0.00mW(DC)  0.35mW(AC)
)  Power for block End_frame_out: 0.00mW(DC)  4.26mW(AC)
)  Power for block End_frame_in: 0.00mW(DC)  0.20mW(AC)
)  Power for block Dr: 0.00mW(DC)  4.20mW(AC)
)  Power for block Dev_sel[3]: 0.00mW(DC)  0.52mW(AC)
)  Power for block Dev_sel[2]: 0.00mW(DC)  0.51mW(AC)
)  Power for block Dev_sel[1]: 0.00mW(DC)  0.51mW(AC)
)  Power for block Dev_sel[0]: 0.00mW(DC)  0.51mW(AC)
)  Power for block Cs32k[2]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Cs32k[1]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Cs32k[0]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Cs16k[4]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Cs16k[3]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Cs16k[2]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Cs16k[1]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Cs16k[0]: 0.00mW(DC)  4.50mW(AC)
)  Power for block Chip_id[3]: 0.00mW(DC)  0.35mW(AC)
)  Power for block Chip_id[2]: 0.00mW(DC)  0.34mW(AC)
)  Power for block Chip_id[1]: 0.00mW(DC)  0.33mW(AC)
)  Power for block Chip_id[0]: 0.00mW(DC)  0.33mW(AC)
```

```
)  Power for block Beg_row_out: 0.00mW(DC) 4.26mW(AC)
)  Power for block Beg_row_in: 0.00mW(DC) 0.36mW(AC)
)  Power for block Beg_frame_out: 0.00mW(DC) 4.26mW(AC)
)  Power for block Beg_frame_in: 0.00mW(DC) 0.47mW(AC)
) Total power consumption (5.5V, 0 DegC 50pf/out_pad):
)       DC:        4.50mW [4.50(core)+0.00(ring)]
)       AC@10MHz:  1080.85mW [654.19(core)+426.66(ring)]
```

10. Timing Setup Files

10.1. reg_room.040

```
LABEL Jn temp 63.0, 5.0V Power=1.07
TEMP_VOLT 63 5.00
HOLDTIME_MARGIN 2.00
SELECT_EXT_CLOCK Clk_in
BIND math/mem_host_if/calibrate 0 1
BIND N_reset/N_reset 1 1
IGNORE_PATH math/mem_host_if/order[0] math/state_mach/control/order[0]
IGNORE_PATH math/mem_host_if/order[1] math/state_mach/control/order[1]
IGNORE_PATH math/mem_host_if/order[2] math/state_mach/control/order[2]
IGNORE_PATH math/mem_host_if/test_int_sub math/pre_div/int_sub/test_int_sub
IGNORE_PATH math/mem_host_if/test math/pre_div/mult/mult_out/test
IGNORE_PATH math/mem_host_if/host_pix_sel math/state_mach/cal_out_gen/host_pix_sel
IGNORE_PATH math/mem_host_if/calibrate math/state_mach/bad_pixel/sel_pixelin/calibrate
IGNORE_PATH math/mem_host_if/calibrate math/state_mach/glue/calibrate
```

10.2. reg_worst.040

```
LABEL Jn temp 113, 4.5V Power=1.07W
TEMP_VOLT 113 4.50
HOLDTIME_MARGIN 2.00
SELECT_EXT_CLOCK Clk_in
BIND N_reset/N_reset 1 1
IGNORE_PATH math/mem_host_if/order[0] math/state_mach/control/order[0]
IGNORE_PATH math/mem_host_if/order[1] math/state_mach/control/order[1]
IGNORE_PATH math/mem_host_if/order[2] math/state_mach/control/order[2]
IGNORE_PATH math/mem_host_if/test_int_sub math/pre_div/int_sub/test_int_sub
IGNORE_PATH math/mem_host_if/test math/pre_div/mult/mult_out/test
IGNORE_PATH math/mem_host_if/host_pix_sel math/state_mach/cal_out_gen/host_pix_sel
IGNORE_PATH math/mem_host_if/calibrate math/state_mach/bad_pixel/sel_pixelin/calibrate
IGNORE_PATH math/mem_host_if/calibrate math/state_mach/glue/calibrate
```

11. Timing Reports

11.1. <Clk_in>, GUARANTEED, Max T, Min V

```
*******************************************************************************
              Genesil Version v8.0.3 -- Thu May 30 14:16:54 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
*******************************************************************************
CLOCK REPORT MODE
-------------------------------------------------------------------------------
Fabline: HP2_CN10B---------------------Corner: GUARANTEED
  Junction Temperature:113 deg C        Voltage:4.50v
  External Clock: Clk_in
 Included setup files:
  #0  reg_worst              (Jn temp 113, 4.5V Power=1.07W)
-------------------------------------------------------------------------------
-------------------------------------------------     CLOCK TIMES (minimum)
Phase 1 High:    55.1   ns             Phase 2 High:    57.2   ns
              ----------                                ----------
Cycle (from Ph1):   115.8   ns         Cycle (from Ph2):    90.5   ns
                  ----------                                ----------
Minimum Cycle Time:   115.8   ns       Symmetric Cycle Time:    115.8   ns
                    ----------                                ----------
-------------------------------------------------------------------------------
-------------------------------------------------    CLOCK WORST CASE PATHS
Minimum Phase 1 high time is    55.1   ns set by:
                               ----------

  ** Clock delay: 4.4ns (59.5-55.1)
   Node                            Cumulative Delay      Transition
   math/divider1/(internal)              59.5                fall
   math/divider1/n[28]                   58.2                rise
   <v/mult/mult_out/numerator[28]        58.0                rise
   </mult/mult_out/numerator[28]'        56.6                rise
   <th/pre_div/mult/mult_out/_N23        56.2                fall
   <h/pre_div/mult/mult_out/n[28]        54.8                rise
   <block/final_add/final_sum[20]        54.8                rise
   <lock/final_add/final_sum[20]'        51.6                rise
   </mult_block/final_add/sum0[8]        39.2                rise
   <lt/mult_block/ms_add0/sum0[8]        39.2                rise
   <t/mult_block/ms_add0/sum0[8]'        38.3                rise
   <t/mult_block/ms_add0/m0_ms[0]        25.9                fall
   </mult_block/gate_m0/and_ms[0]        25.8                fall
   <mult_block/gate_m0/and_ms[0]'        25.3                fall
   <mult_block/gate_m0/disable_ms        20.4                rise
   math/mem_host_if/disable_ms           19.9                rise
   math/mem_host_if/disable_ms'          17.4                rise
   math/mem_host_if/_N389                17.1                fall
   <f/host_ctrl.ctrlword.out_x[9]        16.2                rise
   math/mem_host_if/PHASE_A              11.2                rise
   clk_pad/PHASE_A                       10.4                rise
   Clk_in                                 0.0                rise

Minimum Phase 2 high time is    57.2   ns set by:
                               ----------

  ** Clock delay: 5.3ns (62.5-57.2)
   Node                            Cumulative Delay      Transition
   <_div/mult/mult_out/(internal)        62.5                fall
   <e_div/mult/mult_out/ld_num_hi        61.3                rise
   <h/mem_host_if/ld_numerator_hi        61.0                rise
   </mem_host_if/ld_numerator_hi'        59.3                rise
```

```
   math/mem_host_if/_N385              59.0              fall
   math/mem_host_if/_N455              57.7              rise
   <host_if/host_data.mux1.SEL_1_      55.4              fall
   math/mem_host_if/_N250              41.1              rise
   math/mem_host_if/host_addr[1]        9.9              fall
   Host_addr[1]/host_addr               8.3              fall
   Host_addr[1]/host_addr'              4.2              fall
   Host_addr[1]                         0.0              fall

Minimum cycle time (from Ph1) is  115.8    ns set by:
                                  ----------
  ** Clock delay: 10.8ns (126.7-115.8)
   Node                          Cumulative Delay      Transition
   </Row15.fft15.SHIFT2.mout_y[3]     126.7              rise
   </Row16.row16.csx_3.NAND10.OUT     125.0              rise
   math/divider1/_N1584               123.6              fall
   math/divider1/_N206                123.0              rise
   math/divider1/_N205                122.0              fall
   math/divider1/_N70                 121.3              rise
   math/divider1/_N1692               106.0              fall
   </Row16.row16.csx_14.NAND4.OUT     105.4              rise
   math/divider1/_N81                 104.1              fall
   math/divider1/_N80                 103.5              rise
   math/divider1/_N1677               102.9              fall
   math/divider1/_N1339               101.3              rise
   math/divider1/_N493                100.5              fall
   </Row16.row16.csx_12.NAND4.OUT      99.8              rise
   math/divider1/_N35                  98.5              fall
   math/divider1/_N34                  97.9              rise
   math/divider1/_N1647                97.2              fall
   math/divider1/_N404                 96.0              rise
   math/divider1/_N1632                94.9              fall
   math/divider1/_N372                 93.7              rise
   math/divider1/_N374                 92.9              fall
   <1/Row16.row16.csx_9.NAND4.OUT      92.1              rise
   math/divider1/_N125                 88.9              fall
   <1/Row16.row16.csx_8.NAND4.OUT      88.1              rise
   math/divider1/_N96                  87.0              fall
   math/divider1/_N95                  86.4              rise
   math/divider1/_N1585                85.6              fall
   math/divider1/_N339                 84.4              rise
   math/divider1/_N1570                83.2              fall
   <1/Row16.row16.csx_5.NAND4.OUT      81.7              rise
   math/divider1/_N1555                80.1              fall
   <1/Row16.row16.csx_4.NAND4.OUT      78.9              rise
   math/divider1/_N1540                77.0              fall
   math/divider1/_N1448                76.0              rise
   math/divider1/_N1525                74.5              fall
   <1/Row16.row16.csx_2.NAND4.OUT      72.7              rise
   math/divider1/_N1510                71.0              fall
   math/divider1/_N927                 70.2              rise
   math/divider1/_N1495                68.3              fall
   <1/Row16.row16.csx_1.NAND4.OUT      67.4              rise
   math/divider1/_N110                 64.5              fall
   math/divider1/_N1483                64.0              rise
   math/divider1/n16[16]               61.9              fall
   math/divider1/n16[16]'              57.0              fall
   *<6.INTER0.std2.latch_data[16]      53.2              fall
   math/divider1/n[16]                 50.3              fall
   <v/mult/mult_out/numerator[16]      50.1              fall
   </mult/mult_out/numerator[16]'      49.6              fall
   <th/pre_div/mult/mult_out/_N49      49.2              rise
```

<h/pre_div/mult/mult_out/n[16]	46.6	fall
<_block/final_add/final_sum[8]	46.6	fall
<block/final_add/final_sum[8]'	45.7	fall
</mult_block/final_add/sum0[1]	33.8	fall
<lt/mult_block/ms_add0/sum0[1]	33.8	fall
<t/mult_block/ms_add0/sum0[1]'	33.4	fall
<t/mult_block/ms_add0/m0_ms[0]	25.9	fall
</mult_block/gate_m0/and_ms[0]	25.8	fall
<mult_block/gate_m0/and_ms[0]'	25.3	fall
<mult_block/gate_m0/disable_ms	20.4	rise
math/mem_host_if/disable_ms	19.9	rise
math/mem_host_if/disable_ms'	17.4	rise
math/mem_host_if/_N389	17.1	fall
<f/host_ctrl.ctrlword.out_x[9]	16.2	rise
math/mem_host_if/PHASE_A	11.2	rise
clk_pad/PHASE_A	10.4	rise
Clk_in	0.0	rise

Minimum cycle time (from Ph2) is 90.5 ns set by:

** Clock delay: 12.3ns (102.8-90.5)

Node	Cumulative Delay	Transition
math/pre_div/pix_cal_sub/28	102.8	fall
*<e_div/pix_cal_sub/(internal)	101.0	rise
math/pre_div/pix_cal_sub/n_ovf	97.0	fall
<th/pre_div/pix_cal_sub/n_ovf'	96.8	fall
<v/pix_cal_sub/invert_2_IV2[0]	74.9	fall
</pre_div/pix_cal_sub/BUS_B[0]	73.9	rise
<mach/cal_out_gen/cal_out_n[0]	73.3	rise
<ach/cal_out_gen/cal_out_n[0]'	70.6	rise
<h/state_mach/cal_out_gen/_N95	70.1	fall
<h/state_mach/cal_out_gen/_N64	68.7	rise
<state_mach/cal_out_gen/swapBC	56.4	fall
math/state_mach/glue/swapBC	55.7	fall
math/state_mach/glue/swapBC'	54.1	fall
math/state_mach/glue/_N139	53.7	rise
<th/state_mach/glue/swapBC_out	52.1	fall
math/state_mach/control/swapBC	52.0	fall
<th/state_mach/control/swapBC'	51.6	fall
math/state_mach/control/_N36	51.2	rise
math/state_mach/control/_N21	50.5	fall
math/state_mach/control/_N69	49.1	rise
math/state_mach/control/_N33	45.7	fall
math/state_mach/control/_N39	45.0	rise
math/state_mach/control/_N66	44.6	fall
math/state_mach/control/_N32	43.8	rise
math/state_mach/control/gte	43.0	fall
<th/state_mach/subtract/borrow	42.9	fall
<h/state_mach/subtract/borrow'	41.5	fall
</state_mach/subtract/BUS_A[0]	19.3	fall
<h/state_mach/cal_out_gen/a[0]	19.0	fall
</state_mach/cal_out_gen/a[0]'	18.0	fall
</state_mach/cal_out_gen/_N191	17.6	rise
</cal_out_gen/LATCH_A.out_x[0]	16.1	fall
<h/cal_out_gen/LATCH_A.clock_x	13.3	rise
<tate_mach/cal_out_gen/PHASE_B	10.5	rise
clk_pad/PHASE_B	9.7	rise
Clk_in	0.0	fall

```
*******************************************************************************
              Genesil Version v8.0.3 -- Thu May 30 14:16:56 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
*******************************************************************************
OUTPUT DELAY MODE
-------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: GUARANTEED
  Junction Temperature:113 deg C        Voltage:4.50v
  External Clock: Clk_in
 Included setup files:
  #0  reg_worst              (Jn temp 113, 4.5V Power=1.07W)
-------------------------------------------------------------------------------
-------------------------------------------------      OUTPUT DELAYS (ns)
Output                        Ph1(r) Delay      Ph2(r) Delay      Loading(pf)
                              Min      Max      Min      Max
Beg_frame_out                 24.5     26.6     ---      ---      50.00   PATH
Beg_row_out                   24.6     26.7     ---      ---      50.00   PATH
Cs16k[0]                      ---      ---      18.7     22.8     50.00   PATH
Cs16k[1]                      ---      ---      18.7     22.7     50.00   PATH
Cs16k[2]                      ---      ---      18.7     22.7     50.00   PATH
Cs16k[3]                      ---      ---      18.7     22.7     50.00   PATH
Cs16k[4]                      ---      ---      18.6     22.7     50.00   PATH
Cs32k[0]                      ---      ---      18.6     22.7     50.00   PATH
Cs32k[1]                      ---      ---      18.6     22.7     50.00   PATH
Cs32k[2]                      ---      ---      18.6     22.7     50.00   PATH
Dr                            23.4     28.5     23.4     28.5     50.00   PATH
End_frame_out                 24.2     26.4     ---      ---      50.00   PATH
End_row_out                   24.3     26.5     ---      ---      50.00   PATH
Host_data[0]                  24.1    121.3     24.1    111.9     50.00   PATH
Host_data[10]                 24.0    120.3     24.0    113.8     50.00   PATH
Host_data[11]                 24.0    121.1     24.0    115.5     50.00   PATH
Host_data[12]                 24.0    120.2     24.0    112.0     50.00   PATH
Host_data[13]                 23.9    119.9     23.9    116.9     50.00   PATH
Host_data[14]                 23.9    122.3     23.9    116.8     50.00   PATH
Host_data[15]                 23.9    121.5     23.9    113.3     50.00   PATH
Host_data[1]                  24.1    120.3     24.1    113.1     50.00   PATH
Host_data[2]                  24.1    120.7     24.1    113.8     50.00   PATH
Host_data[3]                  24.1    120.2     24.1    112.4     50.00   PATH
Host_data[4]                  24.1    122.0     24.1    113.9     50.00   PATH
Host_data[5]                  24.1    122.6     24.1    113.1     50.00   PATH
Host_data[6]                  24.1    121.4     24.1    113.3     50.00   PATH
Host_data[7]                  24.1    123.7     24.1    115.6     50.00   PATH
Host_data[8]                  24.1    122.2     24.1    114.0     50.00   PATH
Host_data[9]                  24.1    122.1     24.1    112.7     50.00   PATH
Mem_addr[0]                   ---      ---      19.0     23.0     50.00   PATH
Mem_addr[10]                  ---      ---      18.9     23.0     50.00   PATH
Mem_addr[11]                  ---      ---      18.9     23.0     50.00   PATH
Mem_addr[12]                  ---      ---      18.9     23.0     50.00   PATH
Mem_addr[13]                  ---      ---      18.9     23.0     50.00   PATH
Mem_addr[14]                  ---      ---      18.9     23.0     50.00   PATH
Mem_addr[15]                  ---      ---      18.9     22.9     50.00   PATH
Mem_addr[16]                  ---      ---      18.9     22.9     50.00   PATH
Mem_addr[17]                  ---      ---      18.8     22.9     50.00   PATH
Mem_addr[18]                  ---      ---      18.8     22.9     50.00   PATH
Mem_addr[19]                  ---      ---      18.8     22.9     50.00   PATH
Mem_addr[1]                   ---      ---      19.0     23.0     50.00   PATH
Mem_addr[20]                  ---      ---      18.8     22.9     50.00   PATH
Mem_addr[21]                  ---      ---      18.8     22.8     50.00   PATH
Mem_addr[22]                  ---      ---      18.7     22.8     50.00   PATH
Mem_addr[2]                   ---      ---      19.0     23.0     50.00   PATH
Mem_addr[3]                   ---      ---      19.0     23.0     50.00   PATH
```

Mem_addr[4]	---	---	19.0	23.0	50.00	PATH
Mem_addr[5]	---	---	19.0	23.0	50.00	PATH
Mem_addr[6]	---	---	19.0	23.0	50.00	PATH
Mem_addr[7]	---	---	19.0	23.0	50.00	PATH
Mem_addr[8]	---	---	19.0	23.0	50.00	PATH
Mem_addr[9]	---	---	18.9	23.0	50.00	PATH
Mem_data[0]	---	---	25.4	27.9	50.00	PATH
Mem_data[10]	---	---	24.2	27.3	50.00	PATH
Mem_data[11]	---	---	24.6	27.9	50.00	PATH
Mem_data[12]	---	---	24.3	27.5	50.00	PATH
Mem_data[13]	---	---	24.2	27.2	50.00	PATH
Mem_data[14]	---	---	24.1	27.2	50.00	PATH
Mem_data[15]	---	---	24.4	27.7	50.00	PATH
Mem_data[1]	---	---	24.5	27.4	50.00	PATH
Mem_data[2]	---	---	24.7	27.5	50.00	PATH
Mem_data[3]	---	---	24.5	27.4	50.00	PATH
Mem_data[4]	---	---	25.1	27.8	50.00	PATH
Mem_data[5]	---	---	24.8	27.6	50.00	PATH
Mem_data[6]	---	---	24.8	27.6	50.00	PATH
Mem_data[7]	---	---	24.6	27.5	50.00	PATH
Mem_data[8]	---	---	24.5	27.4	50.00	PATH
Mem_data[9]	---	---	24.3	27.3	50.00	PATH
N_mem_oe	---	---	22.5	24.7	50.00	PATH
N_mem_we	28.2	28.2	36.1	40.2	50.00	PATH
Pixel_clk_out	19.3	23.4	---	---	50.00	PATH
Pixel_out[0]	34.3	68.5	41.1	66.8	50.00	PATH
Pixel_out[10]	33.6	68.0	40.5	66.3	50.00	PATH
Pixel_out[11]	33.2	67.6	40.1	66.0	50.00	PATH
Pixel_out[12]	33.3	67.7	40.1	66.0	50.00	PATH
Pixel_out[13]	33.1	67.5	40.0	65.9	50.00	PATH
Pixel_out[14]	32.8	67.3	39.6	65.6	50.00	PATH
Pixel_out[15]	34.0	68.2	40.9	66.5	50.00	PATH
Pixel_out[1]	35.8	69.9	42.7	68.2	50.00	PATH
Pixel_out[2]	36.6	70.3	43.5	68.7	50.00	PATH
Pixel_out[3]	36.3	70.2	43.2	68.6	50.00	PATH
Pixel_out[4]	36.4	70.3	43.3	68.7	50.00	PATH
Pixel_out[5]	35.4	69.3	42.3	67.7	50.00	PATH
Pixel_out[6]	35.4	69.4	42.3	67.7	50.00	PATH
Pixel_out[7]	34.6	68.7	41.5	67.1	50.00	PATH
Pixel_out[8]	37.1	70.9	44.0	69.2	50.00	PATH
Pixel_out[9]	34.0	68.3	40.9	66.6	50.00	PATH

```
*******************************************************************************
              Genesil Version v8.0.3 -- Thu May 30 14:19:37 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
*******************************************************************************
SETUP AND HOLD MODE
-------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: GUARANTEED
  Junction Temperature:113 deg C        Voltage:4.50v
  External Clock: Clk_in
 Included setup files:
  #0  reg_worst              (Jn temp 113, 4.5V Power=1.07W)
-------------------------------------------------------------------------------
-------------------------------------------------INPUT SETUP AND HOLD TIMES (ns)
```

Input	Setup Time		Hold Time		
	Ph1(f)	Ph2(f)	Ph1(f)	Ph2(f)	
Beg_frame_in	---	6.6	---	-2.2	PATH
Beg_row_in	---	3.7	---	-0.7	PATH
Chip_id[0]	48.8	---	-4.5	---	PATH
Chip_id[1]	48.9	---	-3.8	---	PATH
Chip_id[2]	48.1	---	-3.5	---	PATH
Chip_id[3]	49.5	---	-5.1	---	PATH
Dev_sel[0]	51.9	---	-8.0	---	PATH
Dev_sel[1]	52.6	---	-7.1	---	PATH
Dev_sel[2]	51.5	---	-7.1	---	PATH
Dev_sel[3]	52.5	---	-8.4	---	PATH
End_frame_in	---	1.3	---	1.7	PATH
End_row_in	---	3.6	---	-0.6	PATH
Fpa_pixel[0]	---	0.8	---	2.1	PATH
Fpa_pixel[10]	---	0.8	---	2.1	PATH
Fpa_pixel[11]	---	0.9	---	2.1	PATH
Fpa_pixel[12]	---	2.6	---	0.5	PATH
Fpa_pixel[13]	---	2.8	---	0.4	PATH
Fpa_pixel[14]	---	2.8	---	0.4	PATH
Fpa_pixel[15]	---	2.4	---	0.7	PATH
Fpa_pixel[1]	---	0.6	---	2.4	PATH
Fpa_pixel[2]	---	0.7	---	2.2	PATH
Fpa_pixel[3]	---	1.1	---	1.8	PATH
Fpa_pixel[4]	---	1.3	---	1.7	PATH
Fpa_pixel[5]	---	1.1	---	1.8	PATH
Fpa_pixel[6]	---	1.5	---	1.5	PATH
Fpa_pixel[7]	---	1.5	---	1.5	PATH
Fpa_pixel[8]	---	1.8	---	1.3	PATH
Fpa_pixel[9]	---	1.7	---	1.3	PATH
Host_addr[0]	23.4	---	-5.5	---	PATH
Host_addr[1]	47.6	58.4	-4.6	-20.8	PATH
Host_addr[2]	42.9	45.6	-4.7	-19.2	PATH
Host_addr[3]	33.7	29.1	-4.5	-10.9	PATH
Host_addr[4]	27.6	23.0	-4.6	-8.1	PATH
Host_data[0]	31.9	---	-8.5	---	PATH
Host_data[10]	17.1	---	-6.3	---	PATH
Host_data[11]	16.7	---	-5.9	---	PATH
Host_data[12]	16.4	---	-6.1	---	PATH
Host_data[13]	16.1	---	-5.2	---	PATH
Host_data[14]	16.5	---	-5.7	---	PATH
Host_data[15]	16.0	---	-5.2	---	PATH
Host_data[1]	31.4	---	-7.8	---	PATH
Host_data[2]	22.5	---	-7.4	---	PATH
Host_data[3]	18.4	---	-7.5	---	PATH
Host_data[4]	17.7	---	-6.6	---	PATH
Host_data[5]	17.7	---	-6.8	---	PATH
Host_data[6]	17.5	---	-6.2	---	PATH

Host_data[7]	17.5	---	-6.6	---	PATH
Host_data[8]	17.4	---	-6.3	---	PATH
Host_data[9]	17.1	---	-6.4	---	PATH
Mem_data[0]	---	5.6	---	-0.2	PATH
Mem_data[10]	---	3.4	---	2.1	PATH
Mem_data[11]	---	3.5	---	2.0	PATH
Mem_data[12]	---	4.0	---	1.5	PATH
Mem_data[13]	---	3.8	---	1.7	PATH
Mem_data[14]	---	3.8	---	1.7	PATH
Mem_data[15]	---	4.4	---	1.1	PATH
Mem_data[1]	---	5.8	---	-0.4	PATH
Mem_data[2]	---	5.4	---	0.1	PATH
Mem_data[3]	---	5.6	---	-0.1	PATH
Mem_data[4]	---	4.9	---	0.6	PATH
Mem_data[5]	---	4.2	---	1.3	PATH
Mem_data[6]	---	4.6	---	0.8	PATH
Mem_data[7]	---	3.6	---	1.9	PATH
Mem_data[8]	---	4.6	---	0.9	PATH
Mem_data[9]	---	3.4	---	2.1	PATH
N_reset	14.6	17.8	-9.6	-11.1	PATH
Ode	45.2	---	-1.6	---	PATH
Pixel_clk_in	---	-5.6	---	7.8	PATH

```
*******************************************************************************
              Genesil Version v8.0.3 -- Thu May 30 14:19:41 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
*******************************************************************************
VIOLATION MODE
-------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: GUARANTEED
  Junction Temperature:113 deg C        Voltage:4.50v
  External Clock: Clk_in
 Included setup files:
  #0  reg_worst              (Jn temp 113, 4.5V Power=1.07W)
-------------------------------------------------------------------------------
-------------------------------------------------         NO VIOLATIONS
  Hold time check margin: 2.0ns
 ******************************************************************************
```

11.2. <Clk_in>, GUARANTEED, Room T, 5.0 V

```
 Genesil Version v8.0.3 -- Thu May 30 14:20:05 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
********************************************************************************
CLOCK REPORT MODE
--------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: GUARANTEED
  Junction Temperature:63 deg C         Voltage:5.00v
  External Clock: Clk_in
 Included setup files:
  #0  reg_room               (Jn temp 63.0, 5.0V Power=1.07)
--------------------------------------------------------------------------------
-------------------------------------------------     CLOCK TIMES (minimum)
Phase 1 High:    44.6   ns             Phase 2 High:    46.1   ns
              ----------                                ----------
Cycle (from Ph1):    93.5   ns         Cycle (from Ph2):    73.1   ns
                  ----------                                ----------
Minimum Cycle Time:    93.5   ns       Symmetric Cycle Time:     93.5   ns
                     ----------                                ----------
--------------------------------------------------------------------------------
-------------------------------------------------    CLOCK WORST CASE PATHS
Minimum Phase 1 high time is    44.6   ns set by:
                              ----------

  ** Clock delay: 3.5ns (48.1-44.6)
   Node                              Cumulative Delay      Transition
   math/divider1/(internal)               48.1                fall
   math/divider1/n[28]                    47.1                rise
   <v/mult/mult_out/numerator[28]         46.9                rise
   </mult/mult_out/numerator[28]'         45.8                rise
   <th/pre_div/mult/mult_out/_N23         45.5                fall
   <h/pre_div/mult/mult_out/n[28]         44.4                rise
   <block/final_add/final_sum[20]         44.3                rise
   <lock/final_add/final_sum[20]'         41.8                rise
   </mult_block/final_add/sum0[8]         31.7                rise
   <lt/mult_block/ms_add0/sum0[8]         31.7                rise
   <t/mult_block/ms_add0/sum0[8]'         31.0                rise
   <t/mult_block/ms_add0/m0_ms[0]         20.9                fall
   </mult_block/gate_m0/and_ms[0]         20.8                fall
   <mult_block/gate_m0/and_ms[0]'         20.4                fall
   <mult_block/gate_m0/disable_ms         16.4                rise
   math/mem_host_if/disable_ms            16.0                rise
   math/mem_host_if/disable_ms'           14.0                rise
   math/mem_host_if/_N389                 13.8                fall
   <f/host_ctrl.ctrlword.out_x[9]         13.0                rise
   math/mem_host_if/PHASE_A                8.9                rise
   clk_pad/PHASE_A                         8.3                rise
   Clk_in                                  0.0                rise


Minimum Phase 2 high time is    46.1   ns set by:
                              ----------

  ** Clock delay: 4.3ns (50.4-46.1)
   Node                              Cumulative Delay      Transition
   <_div/mult/mult_out/(internal)         50.4                fall
   <e_div/mult/mult_out/ld_num_hi         49.4                rise
   <h/mem_host_if/ld_numerator_hi         49.2                rise
   </mem_host_if/ld_numerator_hi'         47.8                rise
   math/mem_host_if/_N385                 47.5                fall
   math/mem_host_if/_N455                 46.4                rise
   <host_if/host_data.mux1.SEL_1_         44.6                fall
   math/mem_host_if/_N250                 32.7                rise
```

math/mem_host_if/host_addr[1]	7.9	fall
Host_addr[1]/host_addr	6.6	fall
Host_addr[1]/host_addr'	3.3	fall
Host_addr[1]	0.0	fall

Minimum cycle time (from Ph1) is 93.5 ns set by:

** Clock delay: 8.7ns (102.2-93.5)

Node	Cumulative Delay	Transition
</Row15.fft15.SHIFT2.mout_y[3]	102.2	rise
</Row16.row16.csx_3.NAND10.OUT	100.8	rise
math/divider1/_N1584	99.7	fall
math/divider1/_N206	99.2	rise
math/divider1/_N205	98.4	fall
math/divider1/_N70	97.9	rise
math/divider1/_N1692	85.6	fall
</Row16.row16.csx_14.NAND4.OUT	85.2	rise
math/divider1/_N81	84.2	fall
math/divider1/_N80	83.7	rise
math/divider1/_N1677	83.2	fall
math/divider1/_N1339	81.8	rise
math/divider1/_N493	81.2	fall
</Row16.row16.csx_12.NAND4.OUT	80.6	rise
math/divider1/_N35	79.6	fall
math/divider1/_N34	79.1	rise
math/divider1/_N1647	78.5	fall
math/divider1/_N404	77.5	rise
math/divider1/_N1632	76.7	fall
math/divider1/_N372	75.6	rise
math/divider1/_N374	75.0	fall
<1/Row16.row16.csx_9.NAND4.OUT	74.4	rise
math/divider1/_N125	71.8	fall
<1/Row16.row16.csx_8.NAND4.OUT	71.2	rise
math/divider1/_N96	70.2	fall
math/divider1/_N95	69.7	rise
math/divider1/_N1585	69.1	fall
math/divider1/_N339	68.1	rise
math/divider1/_N1570	67.2	fall
<1/Row16.row16.csx_5.NAND4.OUT	66.0	rise
math/divider1/_N1555	64.7	fall
<1/Row16.row16.csx_4.NAND4.OUT	63.7	rise
math/divider1/_N1540	62.2	fall
math/divider1/_N1448	61.3	rise
math/divider1/_N1525	60.1	fall
<1/Row16.row16.csx_2.NAND4.OUT	58.6	rise
math/divider1/_N1510	57.3	fall
math/divider1/_N927	56.6	rise
math/divider1/_N1495	55.1	fall
<1/Row16.row16.csx_1.NAND4.OUT	54.4	rise
math/divider1/_N110	52.1	fall
math/divider1/_N1483	51.6	rise
math/divider1/n16[16]	50.0	fall
math/divider1/n16[16]'	46.0	fall
*<6.INTER0.std2.latch_data[16]	43.0	fall
math/divider1/n[16]	40.7	fall
<v/mult/mult_out/numerator[16]	40.5	fall
</mult/mult_out/numerator[16]'	40.1	fall
<th/pre_div/mult/mult_out/_N49	39.8	rise
<h/pre_div/mult/mult_out/n[16]	37.7	fall
<_block/final_add/final_sum[8]	37.7	fall
<block/final_add/final_sum[8]'	37.0	fall
</mult_block/final_add/sum0[1]	27.3	fall

```
   <lt/mult_block/ms_add0/sum0[1]      27.2              fall
   <t/mult_block/ms_add0/sum0[1]'      27.0              fall
   <t/mult_block/ms_add0/m0_ms[0]      20.9              fall
   </mult_block/gate_m0/and_ms[0]      20.8              fall
   <mult_block/gate_m0/and_ms[0]'      20.4              fall
   <mult_block/gate_m0/disable_ms      16.4              rise
   math/mem_host_if/disable_ms         16.0              rise
   math/mem_host_if/disable_ms'        14.0              rise
   math/mem_host_if/_N389              13.8              fall
   <f/host_ctrl.ctrlword.out_x[9]      13.0              rise
   math/mem_host_if/PHASE_A             8.9              rise
   clk_pad/PHASE_A                      8.3              rise
   Clk_in                               0.0              rise

Minimum cycle time (from Ph2) is   73.1    ns set by:
                                  ----------
  ** Clock delay: 9.8ns (82.9-73.1)
   Node                          Cumulative Delay      Transition
  .math/pre_div/pix_cal_sub/28         82.9              fall
   *<e_div/pix_cal_sub/(internal)      81.5              rise
   math/pre_div/pix_cal_sub/n_ovf      78.3              fall
   <th/pre_div/pix_cal_sub/n_ovf'      78.1              fall
   <v/pix_cal_sub/invert_2_IV2[0]      60.3              fall
   </pre_div/pix_cal_sub/BUS_B[0]      59.5              rise
   <mach/cal_out_gen/cal_out_n[0]      59.0              rise
   <ach/cal_out_gen/cal_out_n[0]'      56.8              rise
   <h/state_mach/cal_out_gen/_N95      56.5              fall
   <h/state_mach/cal_out_gen/_N64      55.3              rise
   <state_mach/cal_out_gen/swapBC      45.5              fall
   math/state_mach/glue/swapBC         44.9              fall
   math/state_mach/glue/swapBC'        43.7              fall
   math/state_mach/glue/_N139          43.3              rise
   <th/state_mach/glue/swapBC_out      42.1              fall
   math/state_mach/control/swapBC      42.0              fall
   <th/state_mach/control/swapBC'      41.6              fall
   math/state_mach/control/_N36        41.3              rise
   math/state_mach/control/_N21        40.8              fall
   math/state_mach/control/_N69        39.6              rise
   math/state_mach/control/_N33        36.9              fall
   math/state_mach/control/_N39        36.3              rise
   math/state_mach/control/_N66        36.0              fall
   math/state_mach/control/_N32        35.3              rise
   math/state_mach/control/gte         34.7              fall
   <th/state_mach/subtract/borrow      34.6              fall
   <h/state_mach/subtract/borrow'      33.5              fall
   </state_mach/subtract/BUS_A[0]      15.5              fall
   <h/state_mach/cal_out_gen/a[0]      15.3              fall
   </state_mach/cal_out_gen/a[0]'      14.5              fall
   </state_mach/cal_out_gen/_N191      14.1              rise
   </cal_out_gen/LATCH_A.out_x[0]      12.9              fall
   <h/cal_out_gen/LATCH_A.clock_x      10.7              rise
   <tate_mach/cal_out_gen/PHASE_B       8.4              rise
   clk_pad/PHASE_B                      7.8              rise
   Clk_in                               0.0              fall
 ------------------------------------------------------------------------------
```

```
*******************************************************************************
            Genesil Version v8.0.3 -- Thu May 30 14:20:07 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
*******************************************************************************
OUTPUT DELAY MODE
-------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: GUARANTEED
  Junction Temperature:63 deg C         Voltage:5.00v
  External Clock: Clk_in
 Included setup files:
  #0  reg_room          (Jn temp 63.0, 5.0V Power=1.07)
-------------------------------------------------------------------------------
                                                OUTPUT DELAYS (ns)
Output                      Ph1(r) Delay      Ph2(r) Delay      Loading(pf)
                            Min    Max        Min    Max
Beg_frame_out               19.6   21.4       ---    ---        50.00   PATH
Beg_row_out                 19.7   21.4       ---    ---        50.00   PATH
Cs16k[0]                    ---    ---        15.0   18.3       50.00   PATH
Cs16k[1]                    ---    ---        15.0   18.3       50.00   PATH
Cs16k[2]                    ---    ---        15.0   18.3       50.00   PATH
Cs16k[3]                    ---    ---        14.9   18.3       50.00   PATH
Cs16k[4]                    ---    ---        14.9   18.2       50.00   PATH
Cs32k[0]                    ---    ---        14.9   18.2       50.00   PATH
Cs32k[1]                    ---    ---        14.9   18.2       50.00   PATH
Cs32k[2]                    ---    ---        14.9   18.2       50.00   PATH
Dr                          18.7   22.8       18.7   22.8       50.00   PATH
End_frame_out               19.4   21.2       ---    ---        50.00   PATH
End_row_out                 19.5   21.3       ---    ---        50.00   PATH
Host_data[0]                19.3   97.7       19.3   90.1       50.00   PATH
Host_data[10]               19.2   96.9       19.2   91.3       50.00   PATH
Host_data[11]               19.2   97.5       19.2   92.7       50.00   PATH
Host_data[12]               19.1   96.8       19.1   90.1       50.00   PATH
Host_data[13]               19.1   96.6       19.1   93.8       50.00   PATH
Host_data[14]               19.1   98.5       19.1   93.8       50.00   PATH
Host_data[15]               19.1   97.8       19.1   91.2       50.00   PATH
Host_data[1]                19.3   96.9       19.3   90.9       50.00   PATH
Host_data[2]                19.3   97.2       19.3   91.3       50.00   PATH
Host_data[3]                19.3   96.8       19.3   90.2       50.00   PATH
Host_data[4]                19.3   98.3       19.3   91.6       50.00   PATH
Host_data[5]                19.3   98.7       19.3   91.1       50.00   PATH
Host_data[6]                19.2   97.8       19.2   91.1       50.00   PATH
Host_data[7]                19.2   99.6       19.2   93.0       50.00   PATH
Host_data[8]                19.2   98.4       19.2   91.7       50.00   PATH
Host_data[9]                19.2   98.4       19.2   90.8       50.00   PATH
Mem_addr[0]                 ---    ---        15.2   18.5       50.00   PATH
Mem_addr[10]                ---    ---        15.2   18.5       50.00   PATH
Mem_addr[11]                ---    ---        15.2   18.5       50.00   PATH
Mem_addr[12]                ---    ---        15.2   18.5       50.00   PATH
Mem_addr[13]                ---    ---        15.1   18.5       50.00   PATH
Mem_addr[14]                ---    ---        15.1   18.5       50.00   PATH
Mem_addr[15]                ---    ---        15.1   18.4       50.00   PATH
Mem_addr[16]                ---    ---        15.1   18.4       50.00   PATH
Mem_addr[17]                ---    ---        15.1   18.4       50.00   PATH
Mem_addr[18]                ---    ---        15.1   18.4       50.00   PATH
Mem_addr[19]                ---    ---        15.1   18.4       50.00   PATH
Mem_addr[1]                 ---    ---        15.2   18.5       50.00   PATH
Mem_addr[20]                ---    ---        15.1   18.4       50.00   PATH
Mem_addr[21]                ---    ---        15.0   18.3       50.00   PATH
Mem_addr[22]                ---    ---        15.0   18.3       50.00   PATH
Mem_addr[2]                 ---    ---        15.2   18.5       50.00   PATH
Mem_addr[3]                 ---    ---        15.2   18.5       50.00   PATH
```

Mem_addr[4]	---	---	15.2	18.5	50.00	PATH
Mem_addr[5]	---	---	15.2	18.5	50.00	PATH
Mem_addr[6]	---	---	15.2	18.5	50.00	PATH
Mem_addr[7]	---	---	15.2	18.5	50.00	PATH
Mem_addr[8]	---	---	15.2	18.5	50.00	PATH
Mem_addr[9]	---	---	15.2	18.5	50.00	PATH
Mem_data[0]	---	---	20.4	22.4	50.00	PATH
Mem_data[10]	---	---	19.4	21.9	50.00	PATH
Mem_data[11]	---	---	19.8	22.3	50.00	PATH
Mem_data[12]	---	---	19.5	22.0	50.00	PATH
Mem_data[13]	---	---	19.5	21.8	50.00	PATH
Mem_data[14]	---	---	19.4	21.8	50.00	PATH
Mem_data[15]	---	---	19.6	22.2	50.00	PATH
Mem_data[1]	---	---	19.7	22.0	50.00	PATH
Mem_data[2]	---	---	19.9	22.1	50.00	PATH
Mem_data[3]	---	---	19.7	22.0	50.00	PATH
Mem_data[4]	---	---	20.2	22.2	50.00	PATH
Mem_data[5]	---	---	19.9	22.1	50.00	PATH
Mem_data[6]	---	---	19.9	22.1	50.00	PATH
Mem_data[7]	---	---	19.8	22.1	50.00	PATH
Mem_data[8]	---	---	19.6	21.9	50.00	PATH
Mem_data[9]	---	---	19.5	21.9	50.00	PATH
N_mem_oe	---	---	18.0	19.8	50.00	PATH
N_mem_we	22.7	22.7	29.0	32.3	50.00	PATH
Pixel_clk_out	15.5	18.8	---	---	50.00	PATH
Pixel_out[0]	27.5	55.1	33.0	53.8	50.00	PATH
Pixel_out[10]	27.0	54.7	32.5	53.4	50.00	PATH
Pixel_out[11]	26.7	54.5	32.2	53.2	50.00	PATH
Pixel_out[12]	26.7	54.5	32.2	53.2	50.00	PATH
Pixel_out[13]	26.6	54.4	32.1	53.1	50.00	PATH
Pixel_out[14]	26.3	54.2	31.8	52.9	50.00	PATH
Pixel_out[15]	27.3	54.9	32.8	53.6	50.00	PATH
Pixel_out[1]	28.8	56.3	34.3	55.0	50.00	PATH
Pixel_out[2]	29.4	56.6	34.9	55.3	50.00	PATH
Pixel_out[3]	29.1	56.5	34.6	55.2	50.00	PATH
Pixel_out[4]	29.2	56.6	34.7	55.3	50.00	PATH
Pixel_out[5]	28.4	55.8	33.9	54.5	50.00	PATH
Pixel_out[6]	28.4	55.8	34.0	54.5	50.00	PATH
Pixel_out[7]	27.8	55.3	33.3	54.0	50.00	PATH
Pixel_out[8]	29.8	57.1	35.3	55.8	50.00	PATH
Pixel_out[9]	27.3	55.0	32.8	53.7	50.00	PATH

```
*******************************************************************************
              Genesil Version v8.0.3 -- Thu May 30 14:22:27 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
*******************************************************************************
SETUP AND HOLD MODE
-------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: GUARANTEED
  Junction Temperature:63 deg C         Voltage:5.00v
  External Clock: Clk_in
 Included setup files:
  #0  reg_room               (Jn temp 63.0, 5.0V Power=1.07)
-------------------------------------------------------------------------------
-----------------------------------------------INPUT SETUP AND HOLD TIMES (ns)
Input                      Setup Time          Hold Time
                          Ph1(f)   Ph2(f)     Ph1(f)   Ph2(f)
Beg_frame_in                ---      5.4        ---      -1.8       PATH
Beg_row_in                  ---      3.0        ---      -0.6       PATH
Chip_id[0]                 39.1      ---       -3.7       ---       PATH
Chip_id[1]                 39.3      ---       -3.1       ---       PATH
Chip_id[2]                 38.6      ---       -2.9       ---       PATH
Chip_id[3]                 39.7      ---       -4.2       ---       PATH
Dev_sel[0]                 41.6      ---       -6.4       ---       PATH
Dev_sel[1]                 42.2      ---       -5.7       ---       PATH
Dev_sel[2]                 41.3      ---       -5.8       ---       PATH
Dev_sel[3]                 42.1      ---       -6.8       ---       PATH
End_frame_in                ---      1.1        ---       1.3       PATH
End_row_in                  ---      3.0        ---      -0.6       PATH
Fpa_pixel[0]                ---      0.7        ---       1.7       PATH
Fpa_pixel[10]               ---      0.7        ---       1.7       PATH
Fpa_pixel[11]               ---      0.8        ---       1.6       PATH
Fpa_pixel[12]               ---      2.1        ---       0.4       PATH
Fpa_pixel[13]               ---      2.3        ---       0.3       PATH
Fpa_pixel[14]               ---      2.3        ---       0.3       PATH
Fpa_pixel[15]               ---      2.0        ---       0.6       PATH
Fpa_pixel[1]                ---      0.5        ---       1.9       PATH
Fpa_pixel[2]                ---      0.6        ---       1.7       PATH
Fpa_pixel[3]                ---      1.0        ---       1.4       PATH
Fpa_pixel[4]                ---      1.1        ---       1.3       PATH
Fpa_pixel[5]                ---      1.0        ---       1.4       PATH
Fpa_pixel[6]                ---      1.2        ---       1.2       PATH
Fpa_pixel[7]                ---      1.2        ---       1.2       PATH
Fpa_pixel[8]                ---      1.5        ---       1.0       PATH
Fpa_pixel[9]                ---      1.4        ---       1.0       PATH
Host_addr[0]               18.8      ---       -4.4       ---       PATH
Host_addr[1]               38.1     47.0       -3.7     -17.1       PATH
Host_addr[2]               34.3     36.6       -3.8     -15.8       PATH
Host_addr[3]               26.9     23.3       -3.6      -8.9       PATH
Host_addr[4]               22.0     18.4       -3.7      -6.6       PATH
Host_data[0]               25.5      ---       -6.8       ---       PATH
Host_data[10]              13.7      ---       -5.0       ---       PATH
Host_data[11]              13.5      ---       -4.8       ---       PATH
Host_data[12]              13.2      ---       -4.9       ---       PATH
Host_data[13]              12.9      ---       -4.2       ---       PATH
Host_data[14]              13.3      ---       -4.6       ---       PATH
Host_data[15]              12.8      ---       -4.2       ---       PATH
Host_data[1]               25.2      ---       -6.3       ---       PATH
Host_data[2]               18.1      ---       -5.9       ---       PATH
Host_data[3]               14.8      ---       -6.0       ---       PATH
Host_data[4]               14.2      ---       -5.3       ---       PATH
Host_data[5]               14.2      ---       -5.4       ---       PATH
Host_data[6]               14.1      ---       -5.0       ---       PATH
```

Host_data[7]	14.0	---	-5.3	---	PATH
Host_data[8]	14.0	---	-5.0	---	PATH
Host_data[9]	13.7	---	-5.1	---	PATH
Mem_data[0]	---	4.6	---	-0.2	PATH
Mem_data[10]	---	2.8	---	1.6	PATH
Mem_data[11]	---	2.8	---	1.6	PATH
Mem_data[12]	---	3.2	---	1.2	PATH
Mem_data[13]	---	3.1	---	1.3	PATH
Mem_data[14]	---	3.1	---	1.3	PATH
Mem_data[15]	---	3.6	---	0.8	PATH
Mem_data[1]	---	4.7	---	-0.3	PATH
Mem_data[2]	---	4.3	---	0.1	PATH
Mem_data[3]	---	4.5	---	-0.1	PATH
Mem_data[4]	---	3.9	---	0.4	PATH
Mem_data[5]	---	3.4	---	1.0	PATH
Mem_data[6]	---	3.8	---	0.6	PATH
Mem_data[7]	---	3.0	---	1.4	PATH
Mem_data[8]	---	3.7	---	0.7	PATH
Mem_data[9]	---	2.8	---	1.7	PATH
N_reset	11.7	14.3	-7.7	-8.9	PATH
Ode	36.3	---	-1.4	---	PATH
Pixel_clk_in	---	-4.4	---	6.2	PATH

```
*******************************************************************************
              Genesil Version v8.0.3 -- Thu May 30 14:22:30 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
*******************************************************************************
VIOLATION MODE
-------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: GUARANTEED
  Junction Temperature:63 deg C         Voltage:5.00v
  External Clock: Clk_in
 Included setup files:
  #0  reg_room               (Jn temp 63.0, 5.0V Power=1.07)
-------------------------------------------------------------------------------
------------------------------------------------         NO VIOLATIONS
  Hold time check margin: 2.0ns
*******************************************************************************
```

11.3. <Clk_in>, TYPICAL, Max T, Min V

```
   Genesil Version v8.0.3 -- Thu May 30 14:23:58 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                      Timing Analyzer
********************************************************************************
CLOCK REPORT MODE
--------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: TYPICAL
  Junction Temperature:113 deg C        Voltage:4.50v
  External Clock: Clk_in
 Included setup files:
  #0  reg_worst              (Jn temp 113, 4.5V Power=1.07W)
--------------------------------------------------------------------------------
------------------------------------------------     CLOCK TIMES (minimum)
Phase 1 High:    35.4   ns             Phase 2 High:    36.2   ns
              ----------                             ----------
Cycle (from Ph1):    74.2   ns         Cycle (from Ph2):    57.2   ns
                  ----------                             ----------
Minimum Cycle Time:    74.2   ns       Symmetric Cycle Time:     74.2   ns
                    ----------                                 ----------
--------------------------------------------------------------------------------
------------------------------------------------    CLOCK WORST CASE PATHS
Minimum Phase 1 high time is    35.4   ns set by:
                             ----------
  ** Clock delay: 2.5ns (37.9-35.4)
   Node                              Cumulative Delay      Transition
   math/divider1/(internal)               37.9                rise
   math/divider1/n[28]                    36.3                fall
   <v/mult/mult_out/numerator[28]         36.3                fall
   </mult/mult_out/numerator[28]'         35.9                fall
   <th/pre_div/mult/mult_out/_N23         35.7                rise
   <h/pre_div/mult/mult_out/n[28]         33.9                fall
   <block/final_add/final_sum[20]         33.9                fall
   <lock/final_add/final_sum[20]'         33.2                fall
   </mult_block/final_add/sum0[8]         24.8                rise
   <lt/mult_block/ms_add0/sum0[8]         24.8                rise
   <t/mult_block/ms_add0/sum0[8]'         24.2                rise
   <t/mult_block/ms_add0/m0_ms[0]         15.9                fall
   </mult_block/gate_m0/and_ms[0]         15.9                fall
   <mult_block/gate_m0/and_ms[0]'         15.5                fall
   <mult_block/gate_m0/disable_ms         12.3                rise
   math/mem_host_if/disable_ms            12.3                rise
   math/mem_host_if/disable_ms'           10.9                rise
   math/mem_host_if/_N389                 10.7                fall
   <f/host_ctrl.ctrlword.out_x[9]         10.1                rise
   math/mem_host_if/PHASE_A                6.7                rise
   clk_pad/PHASE_A                         6.7                rise
   Clk_in                                  0.0                rise

Minimum Phase 2 high time is    36.2   ns set by:
                             ----------
  ** Clock delay: 3.0ns (39.2-36.2)
   Node                              Cumulative Delay      Transition
   math/pix_counter/(internal)            39.2                rise
   <h/pix_counter/wr_pix_count_hi         37.6                fall
   <h/mem_host_if/wr_pix_count_hi         37.6                fall
   </mem_host_if/wr_pix_count_hi'         37.2                fall
   math/mem_host_if/_N270                 36.9                rise
   math/mem_host_if/_N455                 35.8                fall
   <host_if/host_data.mux1.SEL_1_         35.1                rise
   math/mem_host_if/_N250                 13.9                fall
```

```
   math/mem_host_if/host_addr[1]          5.3              rise
   Host_addr[1]/host_addr                 5.3              rise
   Host_addr[1]/host_addr'                2.4              rise
   Host_addr[1]                           0.0              rise

Minimum cycle time (from Ph1) is   74.2    ns set by:
                                  ----------
  ** Clock delay: 6.7ns (80.9-74.2)
   Node                              Cumulative Delay      Transition
   </Row15.fft15.SHIFT2.mout_y[3]         80.9              rise
   </Row16.row16.csx_3.NAND10.OUT         79.9              rise
   math/divider1/_N1584                   78.9              fall
   math/divider1/_N206                    78.6              rise
   math/divider1/_N205                    77.9              fall
   math/divider1/_N70                     77.5              rise
   math/divider1/_N1692                   67.9              fall
   </Row16.row16.csx_14.NAND4.OUT         67.5              rise
   math/divider1/_N81                     66.7              fall
   math/divider1/_N80                     66.3              rise
   math/divider1/_N1677                   65.9              fall
   math/divider1/_N1339                   64.8              rise
   math/divider1/_N493                    64.4              fall
   </Row16.row16.csx_12.NAND4.OUT         63.9              rise
   math/divider1/_N35                     63.0              fall
   math/divider1/_N34                     62.7              rise
   math/divider1/_N1647                   62.2              fall
   math/divider1/_N404                    61.4              rise
   math/divider1/_N1632                   60.7              fall
   math/divider1/_N372                    59.9              rise
   math/divider1/_N374                    59.4              fall
   <1/Row16.row16.csx_9.NAND4.OUT         58.9              rise
   math/divider1/_N125                    56.8              fall
   <1/Row16.row16.csx_8.NAND4.OUT         56.3              rise
   math/divider1/_N96                     55.6              fall
   math/divider1/_N95                     55.2              rise
   math/divider1/_N1585                   54.7              fall
   math/divider1/_N339                    53.9              rise
   math/divider1/_N1570                   53.1              fall
   <1/Row16.row16.csx_5.NAND4.OUT         52.2              rise
   math/divider1/_N1555                   51.1              fall
   <1/Row16.row16.csx_4.NAND4.OUT         50.3              rise
   math/divider1/_N1540                   49.1              fall
   math/divider1/_N1448                   48.5              rise
   math/divider1/_N1525                   47.4              fall
   <1/Row16.row16.csx_2.NAND4.OUT         46.3              rise
   math/divider1/_N1510                   45.2              fall
   math/divider1/_N927                    44.7              rise
   math/divider1/_N1495                   43.4              fall
   <1/Row16.row16.csx_1.NAND4.OUT         42.8              rise
   math/divider1/_N110                    41.0              fall
   math/divider1/_N1483                   40.6              rise
   math/divider1/n16[16]                  39.3              fall
   math/divider1/n16[16]'                 36.3              fall
   *<6.INTER0.std2.latch_data[16]         33.8              fall
   math/divider1/n[16]                    31.9              fall
   <v/mult/mult_out/numerator[16]         31.9              fall
   </mult/mult_out/numerator[16]'         31.6              fall
   <th/pre_div/mult/mult_out/_N49         31.3              rise
   <h/pre_div/mult/mult_out/n[16]         29.6              fall
   <_block/final_add/final_sum[8]         29.6              fall
   <block/final_add/final_sum[8]'         29.1              fall
   </mult_block/final_add/sum0[1]         21.0              fall
```

```
   <lt/mult_block/ms_add0/sum0[1]      21.0              fall
   <t/mult_block/ms_add0/sum0[1]'      20.8              fall
   <t/mult_block/ms_add0/m0_ms[0]      15.9              fall
   </mult_block/gate_m0/and_ms[0]      15.9              fall
   <mult_block/gate_m0/and_ms[0]'      15.5              fall
   <mult_block/gate_m0/disable_ms      12.3              rise
   math/mem_host_if/disable_ms         12.3              rise
   math/mem_host_if/disable_ms'        10.9              rise
   math/mem_host_if/_N389              10.7              fall
   <f/host_ctrl.ctrlword.out_x[9]      10.1              rise
   math/mem_host_if/PHASE_A             6.7              rise
   clk_pad/PHASE_A                      6.7              rise
   Clk_in                               0.0              rise

Minimum cycle time (from Ph2) is   57.2    ns set by:
                                  ----------

  ** Clock delay: 7.5ns (64.7-57.2)
   Node                              Cumulative Delay      Transition
   math/pre_div/pix_cal_sub/28             64.7              fall
   *<e_div/pix_cal_sub/(internal)          63.5              rise
   math/pre_div/pix_cal_sub/n_ovf          61.0              fall
   <th/pre_div/pix_cal_sub/n_ovf'          60.8              fall
   <v/pix_cal_sub/invert_2_IV2[0]          46.7              fall
   </pre_div/pix_cal_sub/BUS_B[0]          46.1              rise
   <mach/cal_out_gen/cal_out_n[0]          46.1              rise
   <ach/cal_out_gen/cal_out_n[0]'          44.5              rise
   <h/state_mach/cal_out_gen/_N95          44.2              fall
   <h/state_mach/cal_out_gen/_N64          43.2              rise
   <state_mach/cal_out_gen/swapBC          35.2              fall
   math/state_mach/glue/swapBC             35.2              fall
   math/state_mach/glue/swapBC'            34.2              fall
   math/state_mach/glue/_N139              33.9              rise
   <th/state_mach/glue/swapBC_out          32.9              fall
   math/state_mach/control/swapBC          32.9              fall
   <th/state_mach/control/swapBC'          32.6              fall
   math/state_mach/control/_N36            32.4              rise
   math/state_mach/control/_N21            31.9              fall
   math/state_mach/control/_N69            31.0              rise
   math/state_mach/control/_N33            28.9              fall
   math/state_mach/control/_N39            28.4              rise
   math/state_mach/control/_N66            28.2              fall
   math/state_mach/control/_N32            27.6              rise
   math/state_mach/control/gte             27.1              fall
   <th/state_mach/subtract/borrow          27.1              fall
   <h/state_mach/subtract/borrow'          26.2              fall
   </state_mach/subtract/BUS_A[0]          11.9              fall
   <h/state_mach/cal_out_gen/a[0]          11.9              fall
   </state_mach/cal_out_gen/a[0]'          11.3              fall
   </state_mach/cal_out_gen/_N191          11.0              rise
   </cal_out_gen/LATCH_A.out_x[0]          10.0              fall
   <h/cal_out_gen/LATCH_A.clock_x           8.1              rise
   <tate_mach/cal_out_gen/PHASE_B           6.3              rise
   clk_pad/PHASE_B                          6.3              rise
   Clk_in                                   0.0              fall
 ------------------------------------------------------------------------------
```

```
********************************************************************************
              Genesil Version v8.0.3 -- Thu May 30 14:24:00 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
********************************************************************************
OUTPUT DELAY MODE
--------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: TYPICAL
  Junction Temperature:113 deg C        Voltage:4.50v
  External Clock: Clk_in
 Included setup files:
  #0  reg_worst              (Jn temp 113, 4.5V Power=1.07W)
--------------------------------------------------------------------------------
-------------------------------------------------      OUTPUT DELAYS (ns)
Output                          Ph1(r) Delay      Ph2(r) Delay      Loading(pf)
                                Min      Max      Min      Max
Beg_frame_out                   16.8     18.8     ---      ---      50.00   PATH
Beg_row_out                     16.9     18.8     ---      ---      50.00   PATH
Cs16k[0]                        ---      ---      13.4     16.6     50.00   PATH
Cs16k[1]                        ---      ---      13.4     16.6     50.00   PATH
Cs16k[2]                        ---      ---      13.4     16.6     50.00   PATH
Cs16k[3]                        ---      ---      13.4     16.6     50.00   PATH
Cs16k[4]                        ---      ---      13.4     16.6     50.00   PATH
Cs32k[0]                        ---      ---      13.4     16.6     50.00   PATH
Cs32k[1]                        ---      ---      13.4     16.6     50.00   PATH
Cs32k[2]                        ---      ---      13.4     16.6     50.00   PATH
Dr                              15.9     18.4     15.9     18.4     50.00   PATH
End_frame_out                   16.6     18.7     ---      ---      50.00   PATH
End_row_out                     16.7     18.8     ---      ---      50.00   PATH
Host_data[0]                    13.7     77.8     13.7     71.9     50.00   PATH
Host_data[10]                   13.7     77.7     13.7     72.7     50.00   PATH
Host_data[11]                   13.7     78.2     13.7     73.6     50.00   PATH
Host_data[12]                   13.7     77.8     13.7     72.2     50.00   PATH
Host_data[13]                   13.7     77.2     13.7     74.4     50.00   PATH
Host_data[14]                   13.7     79.2     13.7     74.5     50.00   PATH
Host_data[15]                   13.7     78.6     13.7     73.0     50.00   PATH
Host_data[1]                    13.7     77.4     13.7     72.3     50.00   PATH
Host_data[2]                    13.7     77.7     13.7     72.4     50.00   PATH
Host_data[3]                    13.7     77.2     13.7     71.8     50.00   PATH
Host_data[4]                    13.7     78.6     13.7     73.0     50.00   PATH
Host_data[5]                    13.7     78.4     13.7     72.2     50.00   PATH
Host_data[6]                    13.7     78.3     13.7     72.7     50.00   PATH
Host_data[7]                    13.7     79.8     13.7     74.2     50.00   PATH
Host_data[8]                    13.7     78.8     13.7     73.2     50.00   PATH
Host_data[9]                    13.7     78.3     13.7     72.1     50.00   PATH
Mem_addr[0]                     ---      ---      13.4     16.6     50.00   PATH
Mem_addr[10]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[11]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[12]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[13]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[14]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[15]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[16]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[17]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[18]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[19]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[1]                     ---      ---      13.4     16.6     50.00   PATH
Mem_addr[20]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[21]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[22]                    ---      ---      13.4     16.6     50.00   PATH
Mem_addr[2]                     ---      ---      13.4     16.6     50.00   PATH
Mem_addr[3]                     ---      ---      13.4     16.6     50.00   PATH
```

Mem_addr[4]	---	---	13.4	16.6	50.00	PATH
Mem_addr[5]	---	---	13.4	16.6	50.00	PATH
Mem_addr[6]	---	---	13.4	16.6	50.00	PATH
Mem_addr[7]	---	---	13.4	16.6	50.00	PATH
Mem_addr[8]	---	---	13.4	16.6	50.00	PATH
Mem_addr[9]	---	---	13.4	16.6	50.00	PATH
Mem_data[0]	---	---	17.1	19.4	50.00	PATH
Mem_data[10]	---	---	16.6	19.2	50.00	PATH
Mem_data[11]	---	---	16.8	19.5	50.00	PATH
Mem_data[12]	---	---	16.7	19.3	50.00	PATH
Mem_data[13]	---	---	16.6	19.2	50.00	PATH
Mem_data[14]	---	---	16.6	19.1	50.00	PATH
Mem_data[15]	---	---	16.7	19.4	50.00	PATH
Mem_data[1]	---	---	16.8	19.2	50.00	PATH
Mem_data[2]	---	---	16.8	19.3	50.00	PATH
Mem_data[3]	---	---	16.8	19.3	50.00	PATH
Mem_data[4]	---	---	17.0	19.4	50.00	PATH
Mem_data[5]	---	---	16.9	19.3	50.00	PATH
Mem_data[6]	---	---	16.9	19.3	50.00	PATH
Mem_data[7]	---	---	16.8	19.3	50.00	PATH
Mem_data[8]	---	---	16.7	19.2	50.00	PATH
Mem_data[9]	---	---	16.6	19.2	50.00	PATH
N_mem_oe	---	---	15.5	17.6	50.00	PATH
N_mem_we	19.0	19.0	24.8	27.5	50.00	PATH
Pixel_clk_out	13.9	17.0	---	---	50.00	PATH
Pixel_out[0]	22.2	44.4	24.0	43.8	50.00	PATH
Pixel_out[10]	21.9	44.2	23.7	43.6	50.00	PATH
Pixel_out[11]	21.7	44.1	23.5	43.5	50.00	PATH
Pixel_out[12]	21.8	44.1	23.6	43.5	50.00	PATH
Pixel_out[13]	21.7	44.1	23.5	43.5	50.00	PATH
Pixel_out[14]	21.5	43.9	23.3	43.3	50.00	PATH
Pixel_out[15]	22.2	44.5	24.0	43.9	50.00	PATH
Pixel_out[1]	22.7	44.8	24.5	44.2	50.00	PATH
Pixel_out[2]	23.3	45.2	25.1	44.6	50.00	PATH
Pixel_out[3]	22.9	45.0	24.7	44.4	50.00	PATH
Pixel_out[4]	22.9	45.0	24.7	44.4	50.00	PATH
Pixel_out[5]	22.8	44.9	24.6	44.3	50.00	PATH
Pixel_out[6]	22.8	44.9	24.6	44.3	50.00	PATH
Pixel_out[7]	22.4	44.6	24.2	44.0	50.00	PATH
Pixel_out[8]	23.3	45.2	25.1	44.7	50.00	PATH
Pixel_out[9]	22.1	44.4	23.9	43.8	50.00	PATH

```
*******************************************************************************
              Genesil Version v8.0.3 -- Thu May 30 14:26:19 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
*******************************************************************************
SETUP AND HOLD MODE
-------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: TYPICAL
  Junction Temperature:113 deg C        Voltage:4.50v
  External Clock: Clk_in
 Included setup files:
  #0  reg_worst              (Jn temp 113, 4.5V Power=1.07W)
-------------------------------------------------------------------------------
-------------------------------------------------INPUT SETUP AND HOLD TIMES (ns)
Input                    Setup Time          Hold Time
                        Ph1(f)   Ph2(f)     Ph1(f)   Ph2(f)
Beg_frame_in              ---      4.5        ---      -1.7       PATH
Beg_row_in                ---      2.7        ---      -0.7       PATH
Chip_id[0]               30.2      ---       -3.1       ---       PATH
Chip_id[1]               30.1      ---       -2.6       ---       PATH
Chip_id[2]               29.7      ---       -2.4       ---       PATH
Chip_id[3]               30.6      ---       -3.4       ---       PATH
Dev_sel[0]               31.4      ---       -4.7       ---       PATH
Dev_sel[1]               31.9      ---       -4.0       ---       PATH
Dev_sel[2]               31.2      ---       -4.0       ---       PATH
Dev_sel[3]               31.7      ---       -4.9       ---       PATH
End_frame_in              ---      1.3        ---       0.7       PATH
End_row_in                ---      2.6        ---      -0.7       PATH
Fpa_pixel[0]              ---      1.0        ---       1.0       PATH
Fpa_pixel[10]             ---      0.9        ---       1.0       PATH
Fpa_pixel[11]             ---      1.0        ---       1.0       PATH
Fpa_pixel[12]             ---      1.9        ---       0.1       PATH
Fpa_pixel[13]             ---      2.0        ---      -0.0       PATH
Fpa_pixel[14]             ---      2.0        ---      -0.0       PATH
Fpa_pixel[15]             ---      1.8        ---       0.2       PATH
Fpa_pixel[1]              ---      0.9        ---       1.1       PATH
Fpa_pixel[2]              ---      0.9        ---       1.0       PATH
Fpa_pixel[3]              ---      1.2        ---       0.8       PATH
Fpa_pixel[4]              ---      1.3        ---       0.7       PATH
Fpa_pixel[5]              ---      1.2        ---       0.8       PATH
Fpa_pixel[6]              ---      1.4        ---       0.6       PATH
Fpa_pixel[7]              ---      1.4        ---       0.6       PATH
Fpa_pixel[8]              ---      1.6        ---       0.4       PATH
Fpa_pixel[9]              ---      1.5        ---       0.5       PATH
Host_addr[0]             13.3      ---       -2.7       ---       PATH
Host_addr[1]             28.7     36.8       -2.4     -12.7       PATH
Host_addr[2]             25.6     28.3       -2.4     -11.5       PATH
Host_addr[3]             19.8     18.0       -2.4      -6.4       PATH
Host_addr[4]             16.0     13.0       -2.4      -4.6       PATH
Host_data[0]             15.2      ---       -3.9       ---       PATH
Host_data[10]             9.8      ---       -3.1       ---       PATH
Host_data[11]             9.7      ---       -3.0       ---       PATH
Host_data[12]             9.5      ---       -3.0       ---       PATH
Host_data[13]             9.4      ---       -2.7       ---       PATH
Host_data[14]             9.6      ---       -2.9       ---       PATH
Host_data[15]             9.3      ---       -2.7       ---       PATH
Host_data[1]             14.7      ---       -3.7       ---       PATH
Host_data[2]             12.8      ---       -3.5       ---       PATH
Host_data[3]             10.3      ---       -3.6       ---       PATH
Host_data[4]             10.1      ---       -3.2       ---       PATH
Host_data[5]             10.0      ---       -3.3       ---       PATH
Host_data[6]             10.1      ---       -3.1       ---       PATH
```

Host_data[7]	10.0	---	-3.2	---	PATH
Host_data[8]	10.0	---	-3.1	---	PATH
Host_data[9]	9.8	---	-3.1	---	PATH
Mem_data[0]	---	3.7	---	-0.1	PATH
Mem_data[10]	---	2.6	---	1.1	PATH
Mem_data[11]	---	2.6	---	1.1	PATH
Mem_data[12]	---	2.8	---	0.8	PATH
Mem_data[13]	---	2.7	---	0.9	PATH
Mem_data[14]	---	2.7	---	1.0	PATH
Mem_data[15]	---	3.1	---	0.6	PATH
Mem_data[1]	---	3.8	---	-0.2	PATH
Mem_data[2]	---	3.6	---	0.1	PATH
Mem_data[3]	---	3.7	---	-0.0	PATH
Mem_data[4]	---	3.3	---	0.3	PATH
Mem_data[5]	---	2.9	---	0.7	PATH
Mem_data[6]	---	3.2	---	0.4	PATH
Mem_data[7]	---	2.7	---	1.0	PATH
Mem_data[8]	---	3.2	---	0.4	PATH
Mem_data[9]	---	2.5	---	1.1	PATH
N_reset	6.9	8.9	-5.0	-4.4	PATH
Ode	27.0	---	-0.5	---	PATH
Pixel_clk_in	---	-3.2	---	4.7	PATH

```
*******************************************************************************
            Genesil Version v8.0.3 -- Thu May 30 14:26:23 1991
Chip: /mntb/nuc/nuc/gt_nuc/nuc
                        Timing Analyzer
*******************************************************************************
VIOLATION MODE
-------------------------------------------------------------------------------
Fabline: HP2_CN10B----------------------Corner: TYPICAL
  Junction Temperature:113 deg C        Voltage:4.50v
  External Clock: Clk_in
 Included setup files:
  #0  reg_worst              (Jn temp 113, 4.5V Power=1.07W)
-------------------------------------------------------------------------------
-------------------------------------------------         NO VIOLATIONS
  Hold time check margin: 2.0ns
```

Appendix A DV Checklist

DV CHECKLIST

1. DV CONTROL NUMBER : _____

2. CUSTOMER INFORMATION

Customer Name : Georgia Tech / CERL Chip Name : GT–VNUC

Address : 400 Tenth Street FAX : (404) 894–3120

CRB Room 377

Atlanta, GA 30332–0540

Project Manager : Dr. C. O. Alford Phone : (404) 894–2505

Design Engineer : Toshiro Kubota Phone : (404) 894–2506

_____ Phone : _____

Test Engineer : Joseph I. Chamdani Phone : (404) 894–2527

3. SERVICES INFORMATION

xx Design Verification Service only. PO #_____

_____ Prototype Service and Design Verification. PO #_____

_____ 1.8% Maintenance

_____ SCS Test _____ Foundry Test _____ Customer Test

When DV is complete, send verified physical database tape to

Customer Y N Silicon Vendor Y N

4. DV CONTACT : Wallace Wai Phone : (408) 371–2900

5. REGRESSION

5.1. GENESIL Version : 8.0.3

5.2. Name of Session Log from recompile : rebuild.LOG

5.3. Include DV regression.CMD : DV_regression.001 (simulation and timing)

5.4. Size of database (MB) : 242 Guess ___ Density : 6250 ___ 1600 ___ TK50 ___
Tar xx wbak ___ Apollo Cartridge ____
(compressed) Sun Cartridge xx

6. FUNCTIONAL INFORMATION (check when included)

6.1. Number of Transistors : ____

6.2. Key Parameters : xx Testing ____

6.3. DV pin description : xx Testing ____

6.4. Block Diagram : xx Testing ____

6.5. Functional Description : xx Testing ____

6.6. Timing Diagrams at Pins : ____ Testing ____

6.7. Annotated Views : xx Testing ____ Annotated Schematics : xx Testing ____

6.8. Chip Text Specification on tape : xx (nuc.012) Density: 6250____ 1600____ TK50____
Apollo Cartridge____
Sun Cartridge xx

7. PHYSICAL INFORMATION

7.1. Fabline Name : HP2_CN10B
Customer–Specific : Y N Fabline GENECAL Directory on tape : Y N
Fabline GENESIL Directory on tape : Y N
Fabline Calibration Status : Production : xx Beta : ____ Alpha : ____
NOTE: If not a production fabline, then approval from SCS is required.

7.2. Plots: (check when included or indicate filename)
Chip Route (D size) : xx Bonding Diagram (B size) : xx
Route Filename : route_d.031 Bonding Filename : bond_b.031

7.3. Die Size : Reported Die Size : 403.2 x 399.2 square–mils
Maximum Acceptable Die Size (+/– 2%) : 432 x 432 square–mils
Minimum Acceptable Die Size (+/– 2%) : 272 x 272 square–mils

7.4. GENESIL Package Name : CPGA180f Spec included? Y N
Cavity/Well Size : 472 mils by 472 mils
Non–GENESIL Supplied Package? Y N Text Spec included on tape? Y N
Vendor Name/Part # : KYOCERA KD–84143A Foundry Approval? Y N

7.5. External Block: none

7.6. LRAM: Y N LROM: Y N LPLA: Y N LogicCompiler Blocks: Y N

7.7. Test Pad (PM Pad) is included? Y N (Required for PS)

7.8. Power Pad : VCC: Core 1 VSS: Core 1
Ring 11 Ring 11

NP protection for nwell pad? Y N

TTL output pads or N Protection for inputs? Y N
If yes, have you received silicon vendor approval? Y N

Error in PADRING.033 (PADRING.DRC)? Y N Hardcopy attached? Y N

ESD requirements _____ Approved by SCS? Y N

8. ELECTRICAL INFORMATION

8.1. Chip Frequency Specified in netlist : 10 MHz Target frequency : 6.67MHz
8.2. Power Dissipation: GENESIL = 1.07 W at 10 MHz Spec = _____ W at _____ MHz
8.3. Operating Voltage: from 4.5 Volts to 5.5 Volts

9. SIMULATION

9.1. Number of Clocking Regimes : 1

	Clock Pad Name	DIV/NO DIV	Ext Clock Name	Int PHASE A/PHASE B Name
1.	clk_pad	NO_DIV	Clk_in	PHASE_A / PHASE_B
2.				
3.				
4.				
5.				

9.2. Simulation Setup Files:
Name : none / default Listings attached : _____
Description : _____

Affected Tests : _____

9.3. Test Vector Set:
Total No. of Vectors : 37667

NOTE : Test vectors written one phase per vector have a maximum test frequency on the IMS Tester of 10 MHz. Test vectors written one cycle per vector have a maximum test frequency on the IMS Tester of 20 MHz.

1. Name : cal_int_n_tr.083 No of vectors : 575
Description : tests register files in *pre_div*

Portions of Chip Tested : *pre_div/reg_file*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

2. Name : cal_out_tr.083 No of vectors : 102
Description : tests an adder in *pre_div/cal_out_sub*

Portions of Chip Tested : *pre_div/cal_out_sub*

-

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

3. Name : cal_out2_tr.083 No of vectors : 102
Description : tests an adder in *pre_div/cal_out_sub*

Portions of Chip Tested : *pre_div/cal_out_sub*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

4. Name : calibration_tr.083 No of vectors : 504
Description : tests the calibration mode with a short address format

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

5. Name : calibration2_tr.083 No of vectors : 504
Description : tests the calibration mode with a long address format

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

6. Name : div_tr.083 No of vectors : 892
Description : tests the divider

Portions of Chip Tested : divider

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

7. Name : div2_tr.083 No of vectors : 732
Description : tests the divider using its scan out feature

Portions of Chip Tested : divider

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

8. Name : div3.083 No of vectors : 2820
Description : tests the divider using its scan out feature

Portions of Chip Tested : divider

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

9. Name : div4.083 No of vectors : 2820
Description : tests the divider using its scan out feature

Portions of Chip Tested : divider

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

10. Name : div5.083 No of vectors : 2820
Description : tests the divider using its scan out feature

Portions of Chip Tested : divider

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

11. Name : div6.083 No of vectors : 2820
Description : tests the divider using its scan out feature

Portions of Chip Tested : divider

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

12. Name : ext_add_tr.083 No of vectors : 206
Description : tests the adder following the multiplier in *pre_div/mult*

Portions of Chip Tested : *pre_div/mult*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

13. Name : ext_add_cin_tr.083 No of vectors : 206
Description : tests the adder following the multiplier in *pre_div/mult*

Portions of Chip Tested : *pre_div/mult*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

14.Name : extern_ram1_tr.083 No of vectors : 746
Description : tests the overall functionality (calibration and compensation) of the first order linear approximation in conjunction with external RAMs

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

15.Name : extern_ram2_tr.083 No of vectors : 874
Description : tests the overall functionality (calibration and compensation) of the second order linear approximation in conjunction with external RAMs

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

16.Name : extern_ram3_tr.083 No of vectors : 1010
Description : tests the overall functionality (calibration and compensation) of the third order linear approximation in conjunction with external RAMs

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

17.Name : extern_ram4_tr.083 No of vectors : 1130
Description : tests the overall functionality (calibration and compensation) of the forth order linear approximation in conjunction with external RAMs.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

18.Name : extern_ram1b_tr.083 No of vectors : 834
Description : tests the overall functionality (calibration and compensation) of the first order linear approximation in conjunction with external RAMs. Bad pixels and dead pixels are included.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

19.Name : extern_ram2b_tr.083 No of vectors : 994
Description : tests the overall functionality (calibration and compensation) of the second order linear approximation in conjunction with external RAMs. Bad pixels and dead pixels are included.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

20.Name : extern_ram3b_tr.083 No of vectors : 1154
Description : tests the overall functionality (calibration and compensation) of the third order linear approximation in conjunction with external RAMs. Bad pixels and dead pixels are included.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

21.Name : extern_ram4b_tr.083 No of vectors : 1314
Description : tests the overall functionality (calibration and compensation) of the forth order linear approximation in conjunction with external RAMs. Bad pixels and dead pixels are included.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

22.Name : extern_ram1c_tr.083 No of vectors : 994
Description : tests the overall functionality (calibration and compensation) of the first order linear approximation in conjunction with external RAMs. Bad pixels and dead pixels are included.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

23.Name : extern_ram2c_tr.083 No of vectors : 1154
Description : tests the overall functionality (calibration and compensation) of the second order linear approximation in conjunction with external RAMs. Bad pixels and dead pixels are included.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

24. Name : extern_ram3c_tr.083 No of vectors : 1314
Description : tests the overall functionality (calibration and compensation) of the third order linear approximation in conjunction with external RAMs. Bad pixels and dead pixels are included.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

25. Name : extern_ram4c_tr.083 No of vectors : 1474
Description : tests the overall functionality (calibration and compensation) of the forth order linear approximation in conjunction with external RAMs. Bad pixels and dead pixels are included.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

26. Name : fadd_tr.083 No of vectors : 310
Description : tests the final adder in the *pre_div/mult*

Portions of Chip Tested : *pre_div/mult*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

27. Name : frame_shift_tr.083 No of vectors : 740
Description : tests the *frame_sync*

Portions of Chip Tested : *frame_sync*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

28. Name : host_mem_wr_tr.083 No of vectors : 184
Description : tests the capability of the host to write/read data to/from the external RAM.

Portions of Chip Tested : memory–to–host interface

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

29. Name : host_mem_wr2_tr.083 No of vectors : 184
Description : tests the capability of the host to write/read data to/from the external RAM.

Portions of Chip Tested : memory–to–host interface

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

30. Name : int_sub_tr.083 No of vectors : 102
Description : tests the adder in *pre_div/int_sub*

Portions of Chip Tested : *pre_div/int_sub*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

31. Name : mult_tr.083 No of vectors : 2438
Description : tests the multiplier in *pre_div/mult*

Portions of Chip Tested : *pre_div/mult*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

32. Name : mathnew_tr.083 No of vectors : 332
Description : tests the functionality of the forth order compensation with bad pixels and dead pixels

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

33. Name : new_tr.083 No of vectors : 360
Description : tests the functionality of the forth order compensation with bad pixels and dead pixels

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

34. Name : new_clk_tr.083 No of vectors : 360
Description : tests the functionality of the forth order compensation with bad pixels and dead pixels

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

35. Name : nuc_tr.083 No of vectors : 330
Description : tests the functionality of the forth order compensation with bad pixels and dead pixels

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

36. Name : order1_tr.083 No of vectors : 358
Description : tests the functionality of the 1st order compensation with bad pixels and dead pixels

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

37. Name : order2_tr.083 No of vectors : 358
Description : tests the functionality of the 2nd order compensation with bad pixels and dead pixels

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

38. Name : order3_tr.083 No of vectors : 358
Description : tests the functionality of the 3rd order compensation with bad pixels and dead pixels

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

39. Name : overflow_tr.083 No of vectors : 406
Description : tests the overflow detection module and check if the final result (Pixel_out) is set to the maximum intensity value.

Portions of Chip Tested : *overflow* and *pixel_out*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

40. Name : pix_cal_tr.083 No of vectors : 114
Description : tests the adder in *pre_div/pix_cal_sub*

Portions of Chip Tested : *pre_div/pix_cal_sub*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

41. Name : pix_counter_tr.083 No of vectors : 464
Description : tests the 16bit and 4bit up counter in *pix_counter*.

Portions of Chip Tested : *pix_counter*

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

42. Name : trans1_tr.083 No of vectors : 968
Description : tests the compensation mode with data from the transputer model.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

43. Name : trans2_tr.083 No of vectors : 968
Description : tests the compensation mode with data from the transputer model.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

44. Name : underflow_tr.083 No of vectors : 238
Description : tests the underflow detection and check if the final result (*Pixel_out*) is set to the least calibration sample intensity.

Portions of Chip Tested : all

Pass with GFL model? yes
Pass with GSL model? yes Use for PS testing? Y N
Pass Fight Test? yes

9.4. IMS Grouping within limitation? Y N (Required for PS only)
9.5. Tester clock frequency = 6.67 MHz
9.6. Signals that must be glitch free: Y N

	Signal Name	Ran GSL with glitch detection feature on?
1.	N_mem_we	Y N
2.		Y N
3.		Y N
4.		Y N
5.		Y N

10. TIMING ANALYSIS

10.1. System Environment

Temperature Coefficient: 35 Degrees C / Watt (theta JA)
Operating Temp : from 0 ^{0} C (min) to 70 ^{0} C (max)
Operating Voltage : from 4.5 V (min) to 5.5 V (max)
room junction temp = 25 + (theta JA * Power) = 63 degrees C
maximum junction temp = maximum ambient temp + (theta JA * Power) = 113 degrees C

10.2. Reports (Include the following reports)

(required for PS)* guaranteed corner 5.0V room junc temp		(required for PS)* guaranteed corner min operating V max junction temp		typical corner min operating V max junction temp	
Cycle	: xx	Cycle	: xx	Cycle	: xx
Setup/Hold	: xx	Setup/Hold	: xx	Setup/Hold	: xx
Output Delay	: xx	Output Delay	: xx	Output Delay	: xx
Violation	: xx	Violation	: xx	Violation	: xx

10.3. Timing Setup Files:

Name : reg_worst.040 Listings attached : yes
Temperature : 113 degrees C Voltage : 4.50 V
Description : worst case condition, maximum junction temperature, minimum operating voltage

Name : reg_room.040 Listings attached : yes
Temperature : 63 degrees C Voltage : 5.00 V
Description : nominal condition, room junction temperature, 5.0 V operating voltage

10.4. Critical Boundary Conditions:

List critical paths here or annotate the timing report.
Attach additional pages if needed.

Clock Name : Clk_in

	report	limit (+/–5%)	report	limit (+/–5%)
1. Phase 1 High	55.1 ns	75.0 ns		
2. Phase 2 High	57.2 ns	75.0ns		
3. Symmetric Cycle	115.8 ns	150.0 ns		
4. Minimum Cycle	115.8 ns	150.0 ns		

Outputs

Signal Name	load (pF)	delay	limit
1. Mem_addr[22:0]	50.00	23.0 ns	27 ns
2. Cs16k[4:0]	50.00	22.8 ns	27 ns
3. Cs32k[2:0]	50.00	22.7 ns	27 ns

4.				
5.				
6.				
7.				

Inputs

	Signal Name	setup report / limit	hold report / limit
1.	Mem_data[15:0]	5.8nsec /8.0nsec	/
2.		/	/
3.		/	/
4.		/	/
5.		/	/
6.		/	/
7.		/	/
8.		/	/
9.		/	/

10.5. Hold Time Violations : none (At 2.0 nsec.)

11. DC CHARACTERISTICS

PARA-METERS	DESCRIPTION	CONDITIONS 0 to 70	CONDITIONS -55 to +125	MIN	MAX
DATA PAD INPUT ONLY					
VIH	Input High Voltage			2.0V	
VIL	Input Low Voltage				0.8V
IIL	Input Leakage	VSS<Vin<VDD	VSS<Vin<VDD	-10uA	10uA
CIN	Input Capacitance				6.0pf
DATA PAD OUTPUT ONLY					
VOH	Output High Voltage	VDD= 4.5V IOH=-2.2	VDD= 4.5V IOH=-2mA	2.4V	
VOL	Output Low Voltage	VDD= 4.5V IOL= 6mA	VDD= 4.5V IOL= 5mA		0.4V
IOZ	Output Leakage current(high Z)	VSS<Vout<VDD	VSS<Vout<VDD	-10uA	10uA
COUT	Output Capacitance				7.0pf
DATA PAD INPUT/OUTPUT					
VOH	Output High Voltage	VDD= 4.5V IOH=-2.2	VDD= 4.5V IOH=-2mA	2.4V	
VOL	Output Low Voltage	VDD= 4.5V IOL= 6mA	VDD= 4.5V IOL= 5mA		0.4V
VIH	Input High Voltage			2.0V	
VIL	Input Low Voltage				0.8V
IOZ	Output leakage current (high Z)	VSS<Vout<VDD	VSS<Vout<VDD	-10uA	10uA
CIO	Input/Output Capacitance				7.0pf
CLOCK PAD					
VIH	Input High Voltage			3.9V	
VIL	Input Low Voltage				0.6V
IIL	Input Leakage	VSS<Vin<VDD	VSS<Vin<VDD	-10uA	10uA
CIN	Input Capacitance				15pf

NOTE: All parameters at a supply voltage of VDD = 5V (+/- 10%).

12. CUSTOMER COMMENTS

Pre–Verification Comments

COMPILE FORCE BUILD ALL always fails at compile–layout of some logic–compiled blocks or some ndp adders. We believe it is due to some internal faults of genesil since the remaining commands including the one just failed can be done successfully by COMPILE BUILD ALL following immidiately after the COMPILE FORCE BUILD ALL has failed. The session log from recompile (rebuild.LOG) contains this two step processes. In the first COMPILE BUILD ALL, COMPILE:LAYOUT at divider1 failed, but in the second COMPILE BUILD ALL, the remaining commands including COMPILE:LAYOUT at divider1 ran successfully.

13. CUSTOMER APPROVAL

The undersigned understands that if any design changes are initiated by the Customer subsequent to this sign–off, the Customer is liable for any charges imposed by Silicon Compiler Systems as agreed to in either the Design Verification Terms & Conditions or the Prototype Services Terms & Conditions. In addition, such changes require the DV process to be started from the beginning, which results in extended DV schedules.

Customer Approval : _____ Date 5 / 31 / 91

Title : Research Assistant

14. SCS APPROVAL

Pre–Verification Comments

_____

_____

_____

_____

SCS Approval : _____ Date ___/___/___
Regional Field Application Consultant

SCS Approval : _____ Date ___/___/___
Technical Support Team Leader

Appendix B Block Diagrams And Schematics

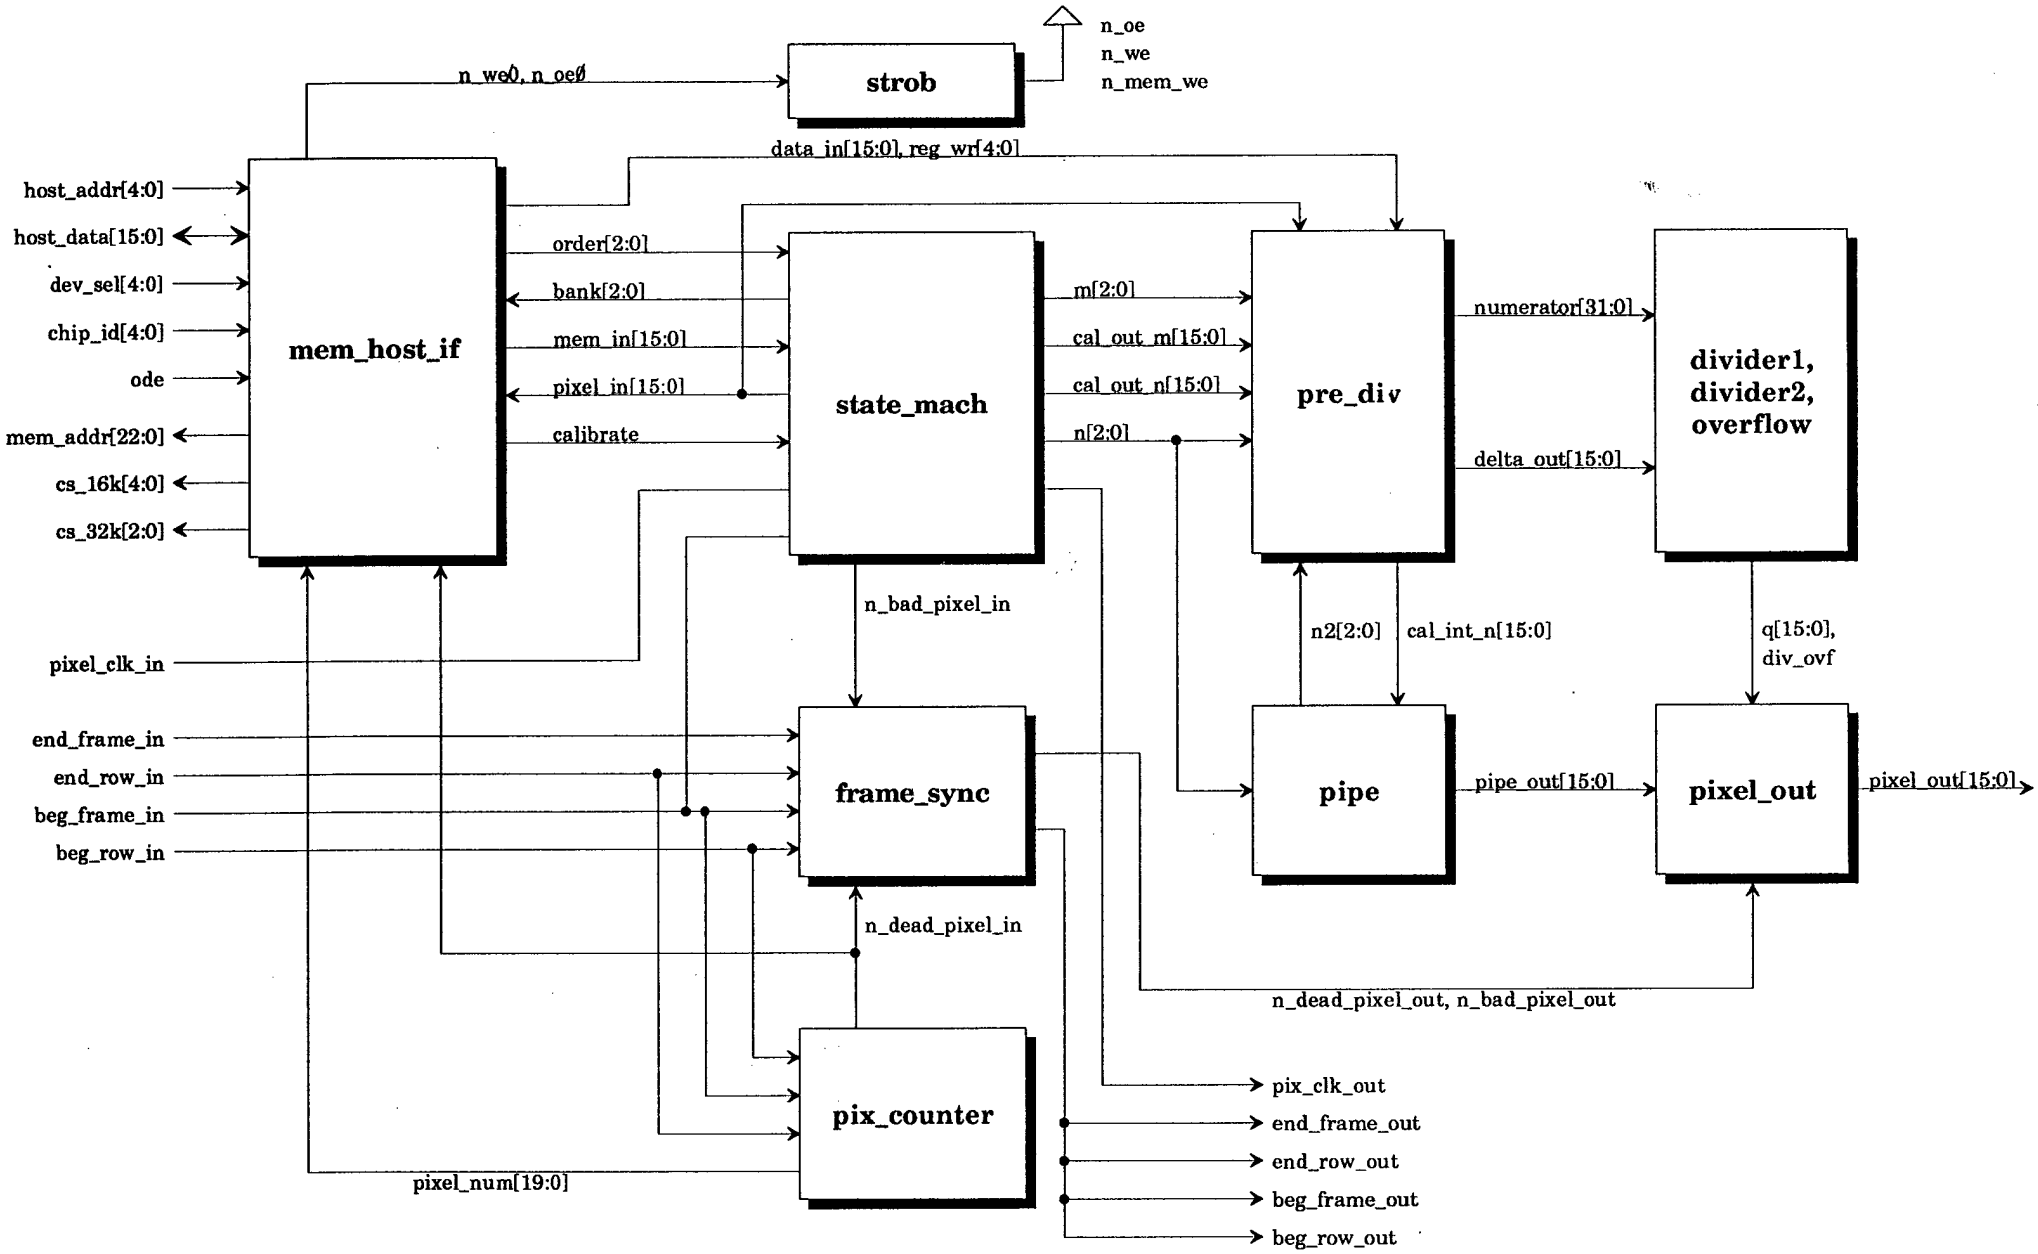

nuc/math (simplified dataflow)

Doc: d:\jackson\prem\block\mathsim.drw
Gen: <chip>/

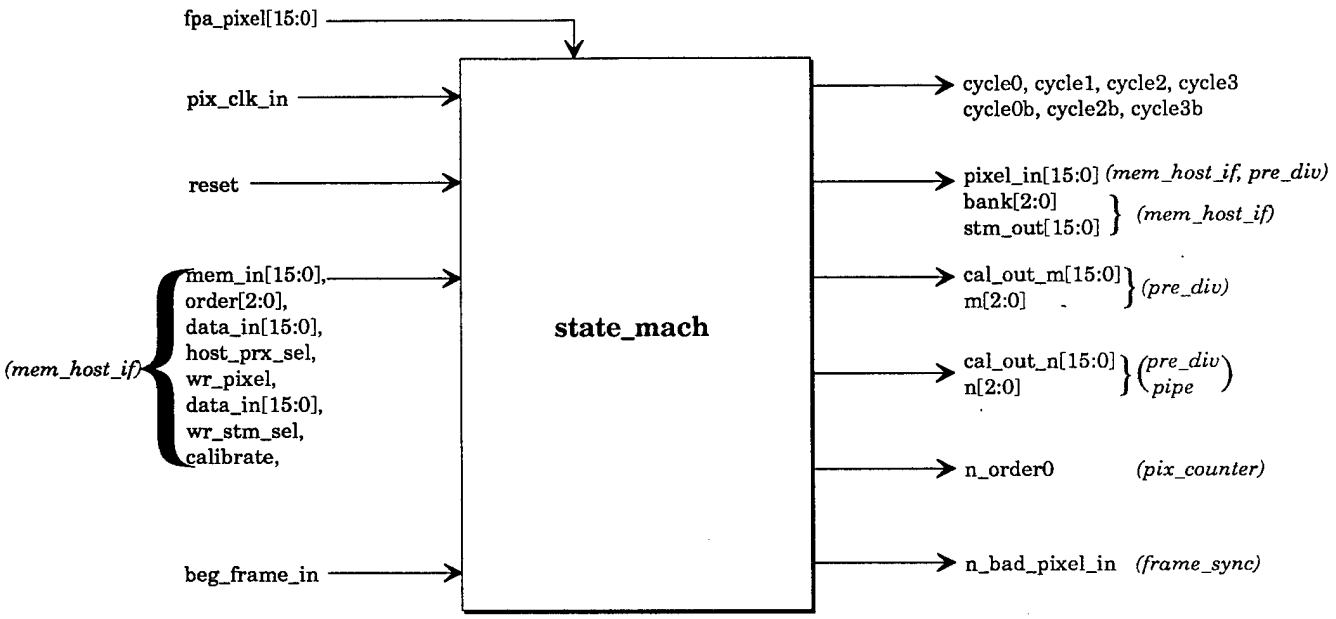

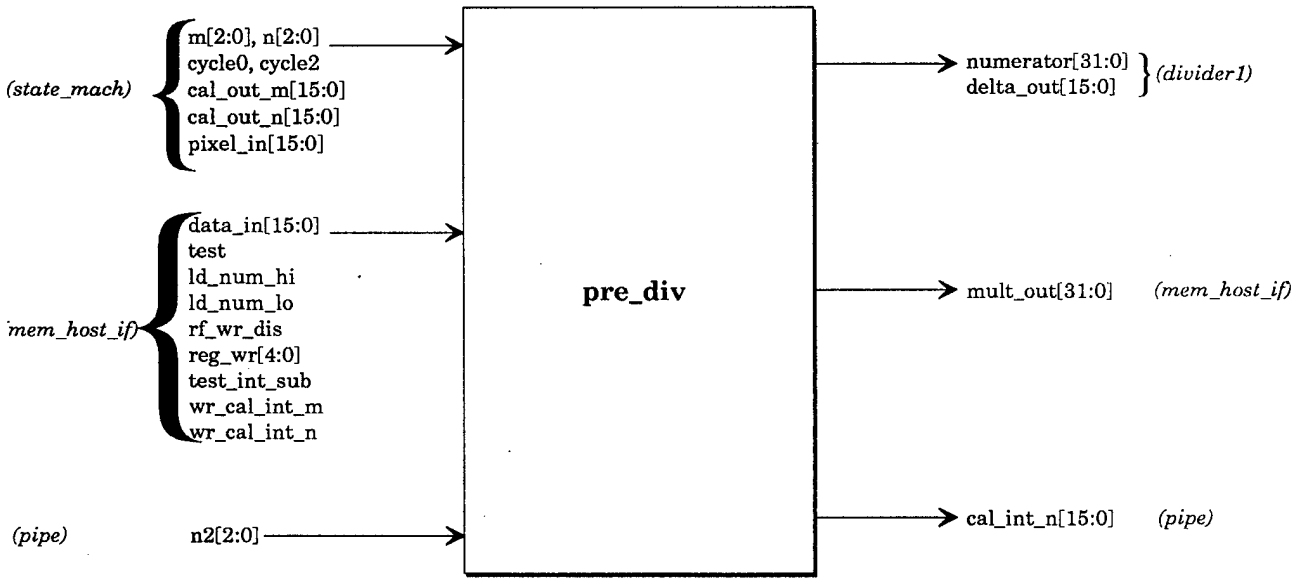

state_mach
pre_div

Dos: d:\jackson\prem\block\prediv.drw
Gen: <chip>/

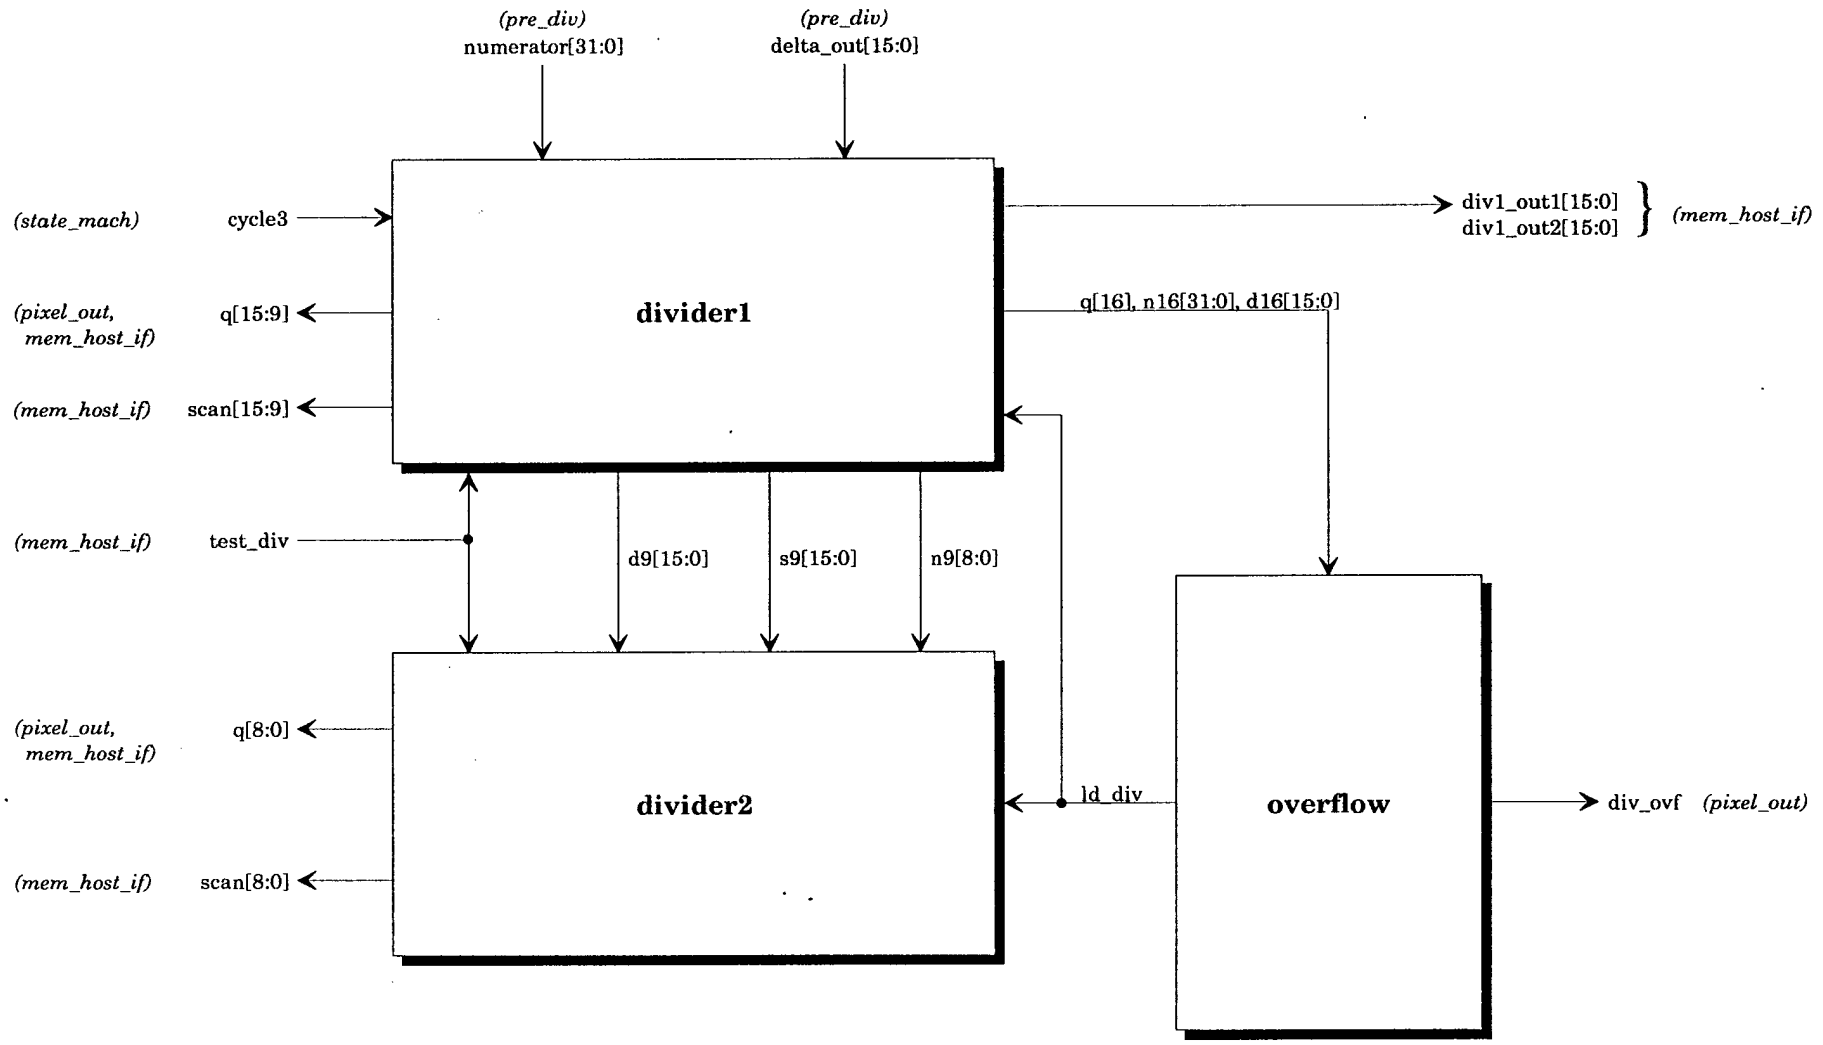

math/divider1
math/divider2
math/overflow

Dos: d:\jackson\prem\dblock\ivider1.drw
Gen: <chip>/

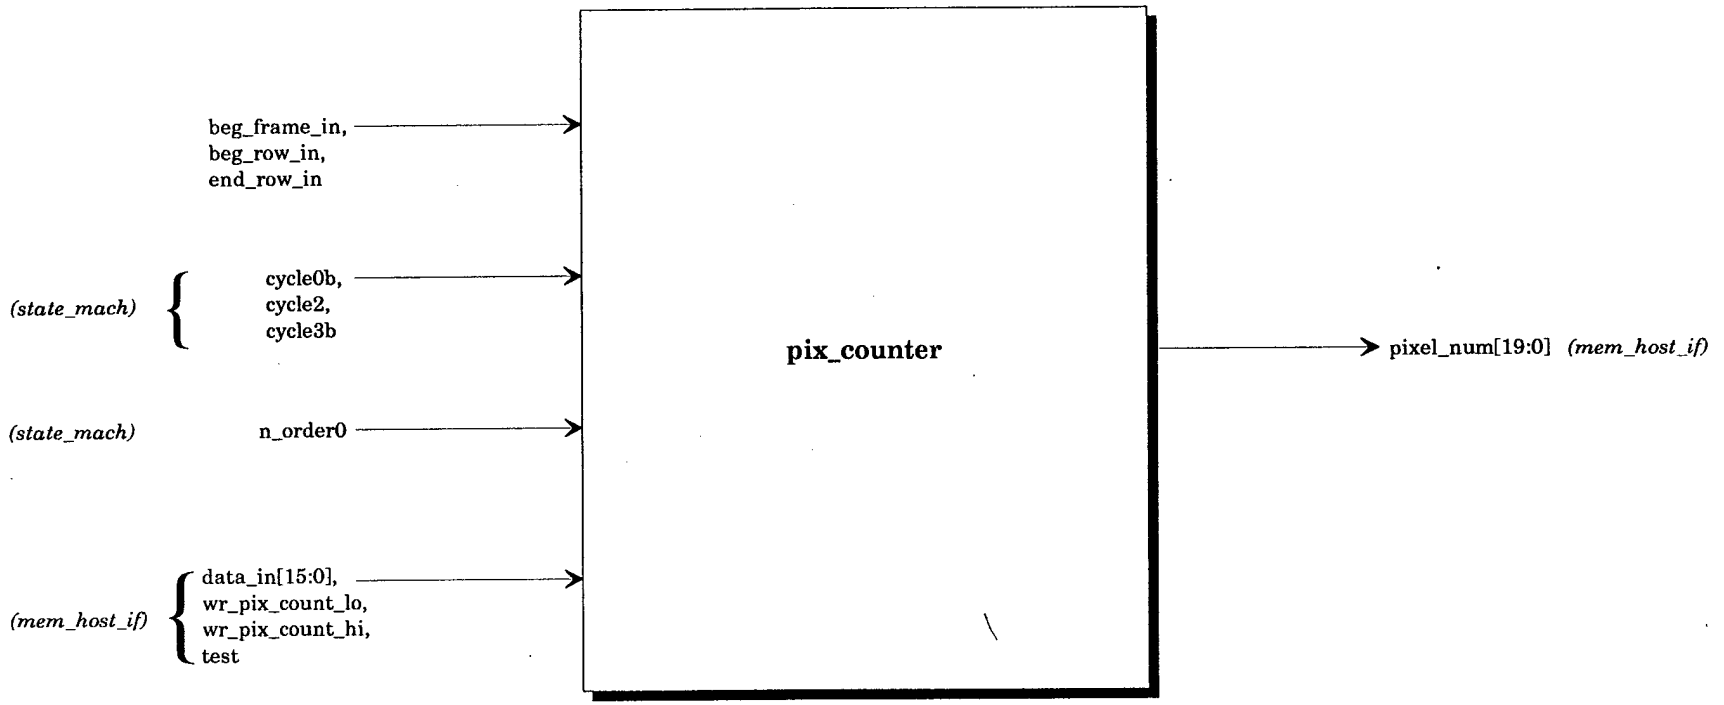

math/pix_counter

Dos: d:\jackson\prem\block\pixcount.drw
Gen: <chip>/

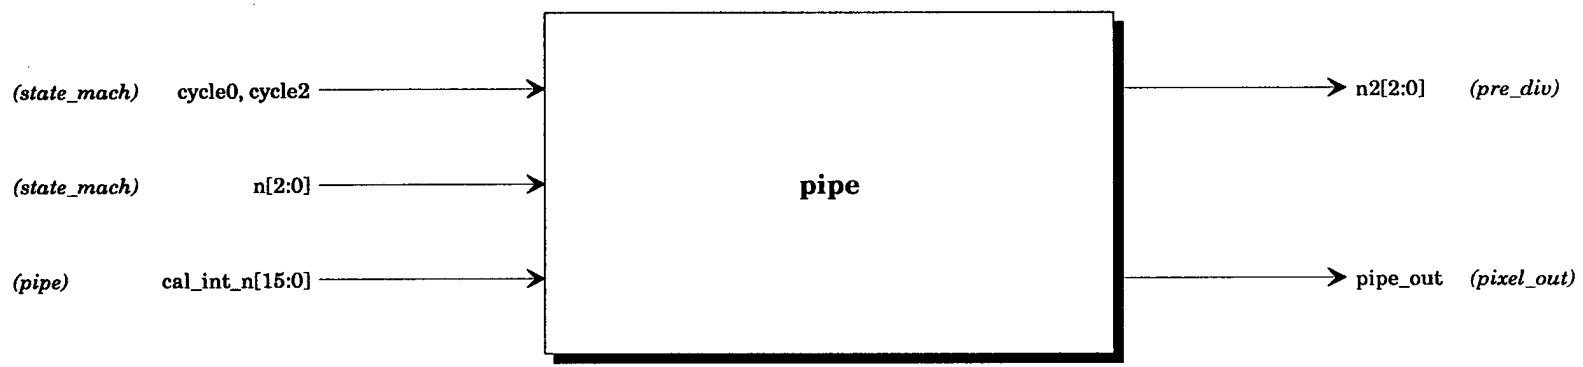

math/pipe

Des: d:\jackson\prem\block\pipe.drw
Gen: <chip>/

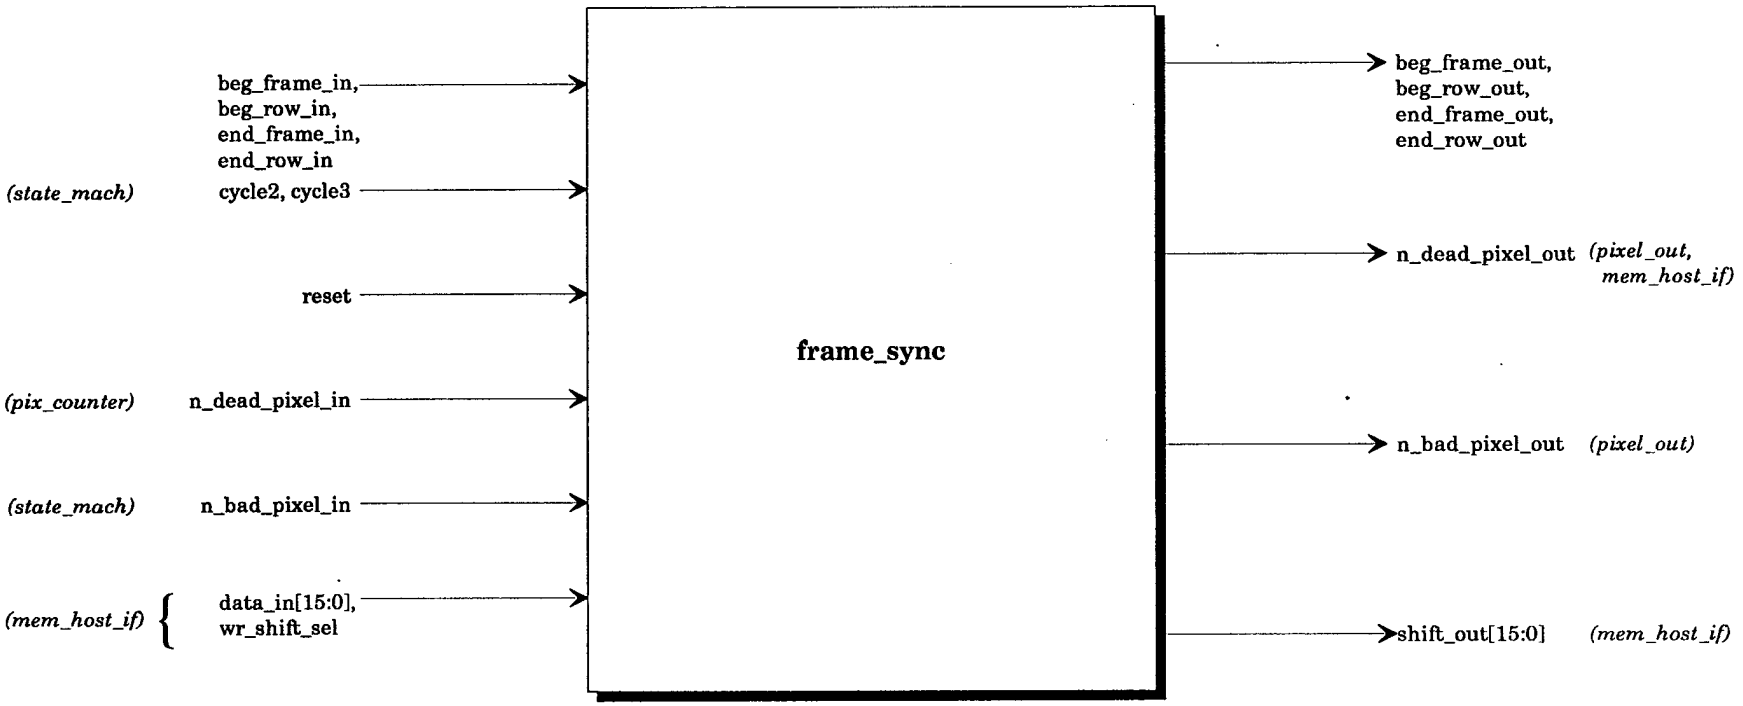

math/frame_sync

Gen: <chip>/

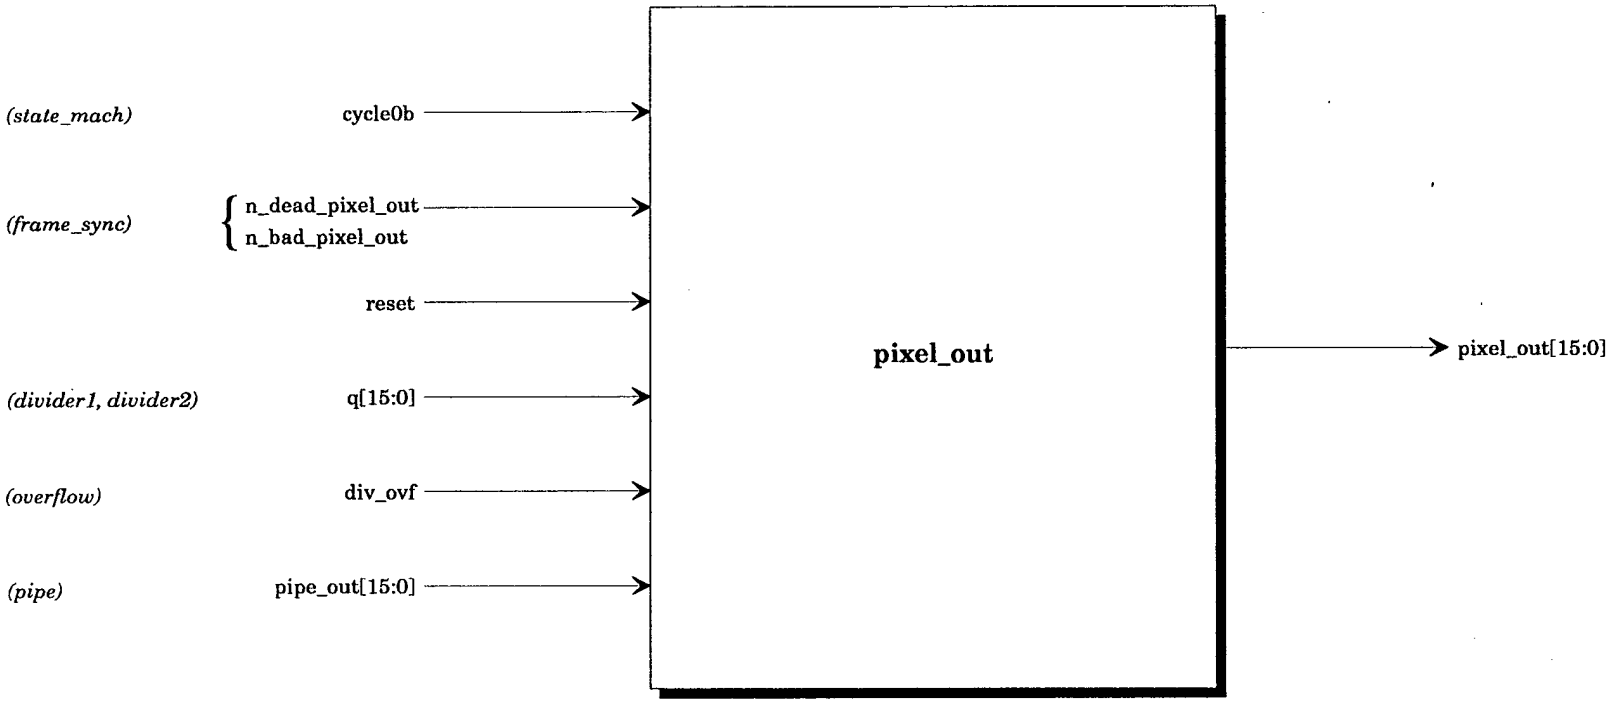

math/pixel_out

Dos: d:\jackson\prem\block\pixelout.drw
Gen: <chip>/

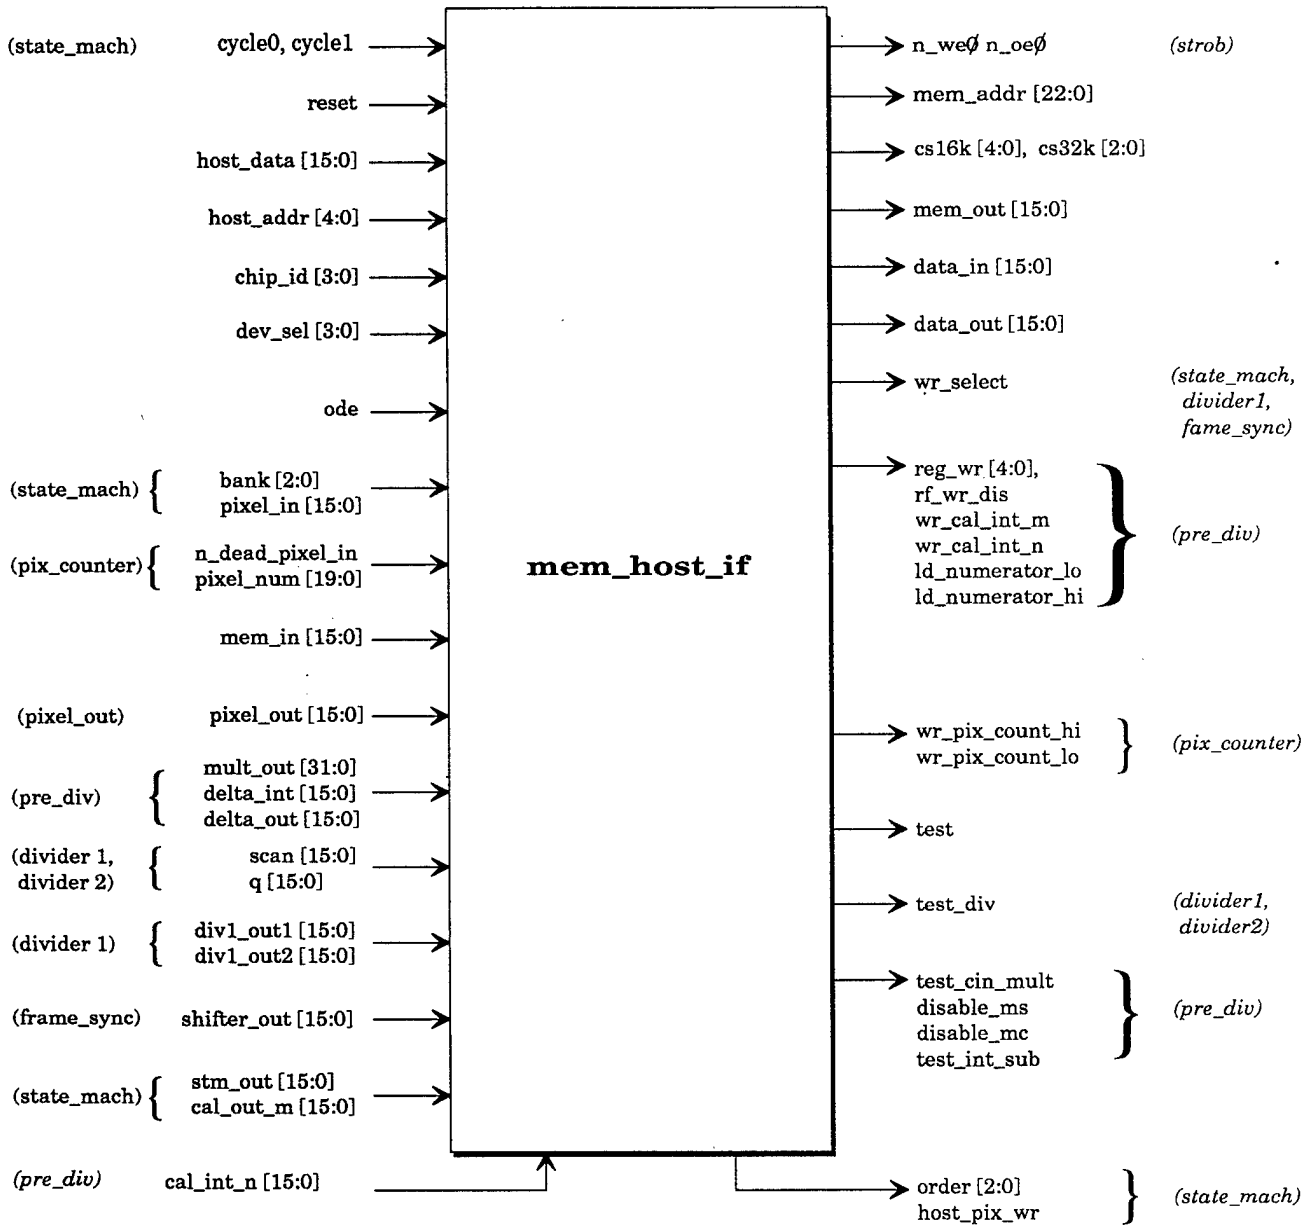

math/mem_host_if

Dos: d:\jackson\prem\block\memhost.drw

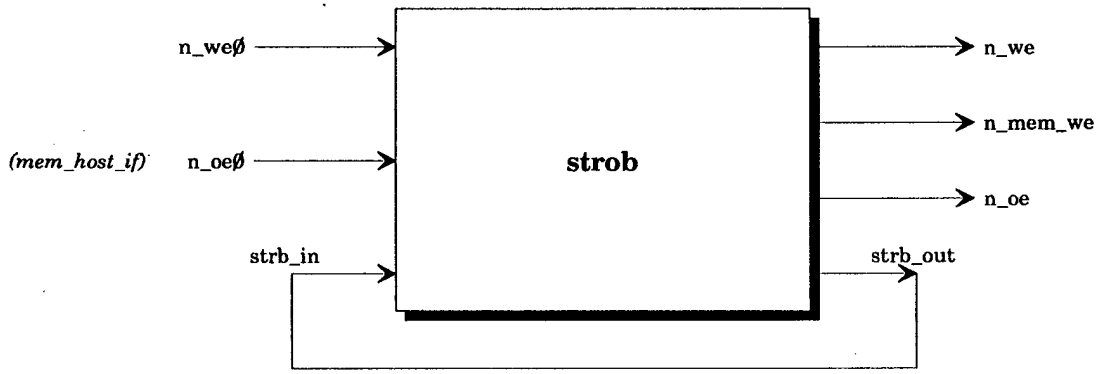

math/strob

Dos: d:\jackson\prem\block\strob.drw
Gen: <chip>/

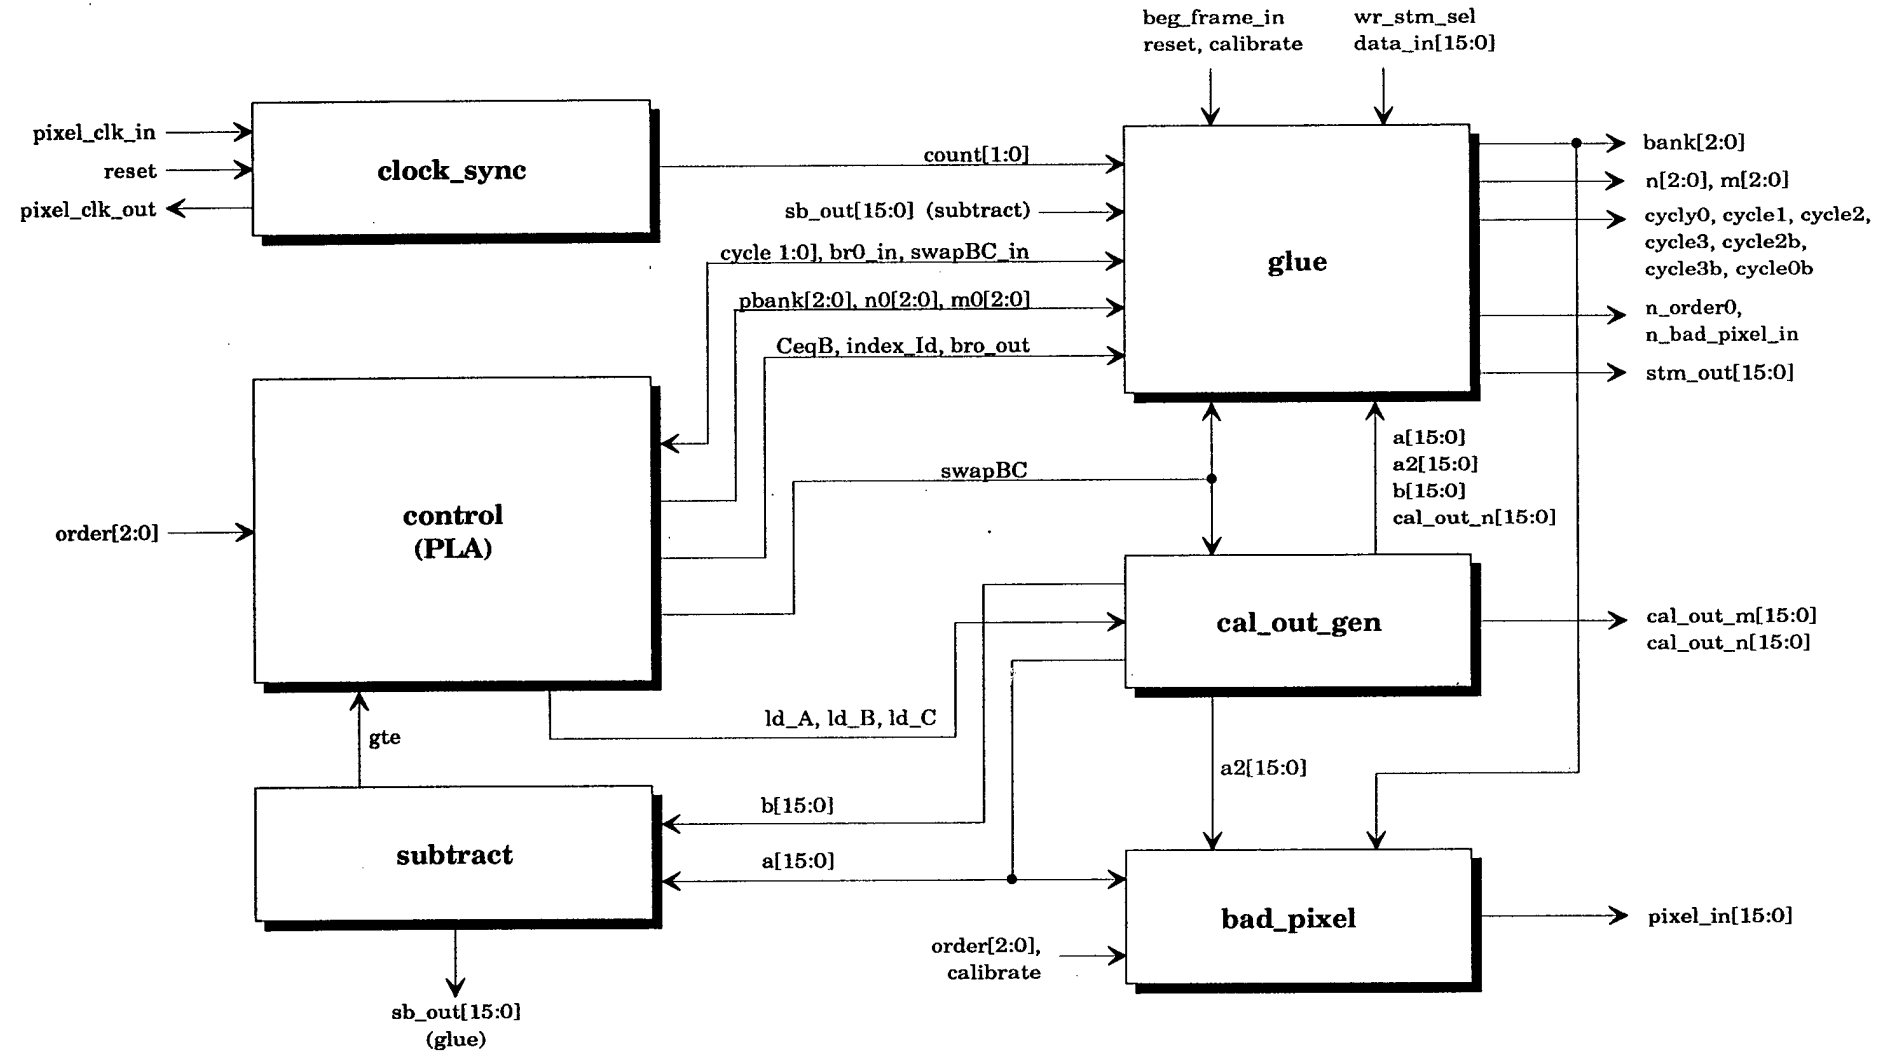

state_mach

Dos: d:\jackson\prem\block\statema.drw
Gen: <chip>/

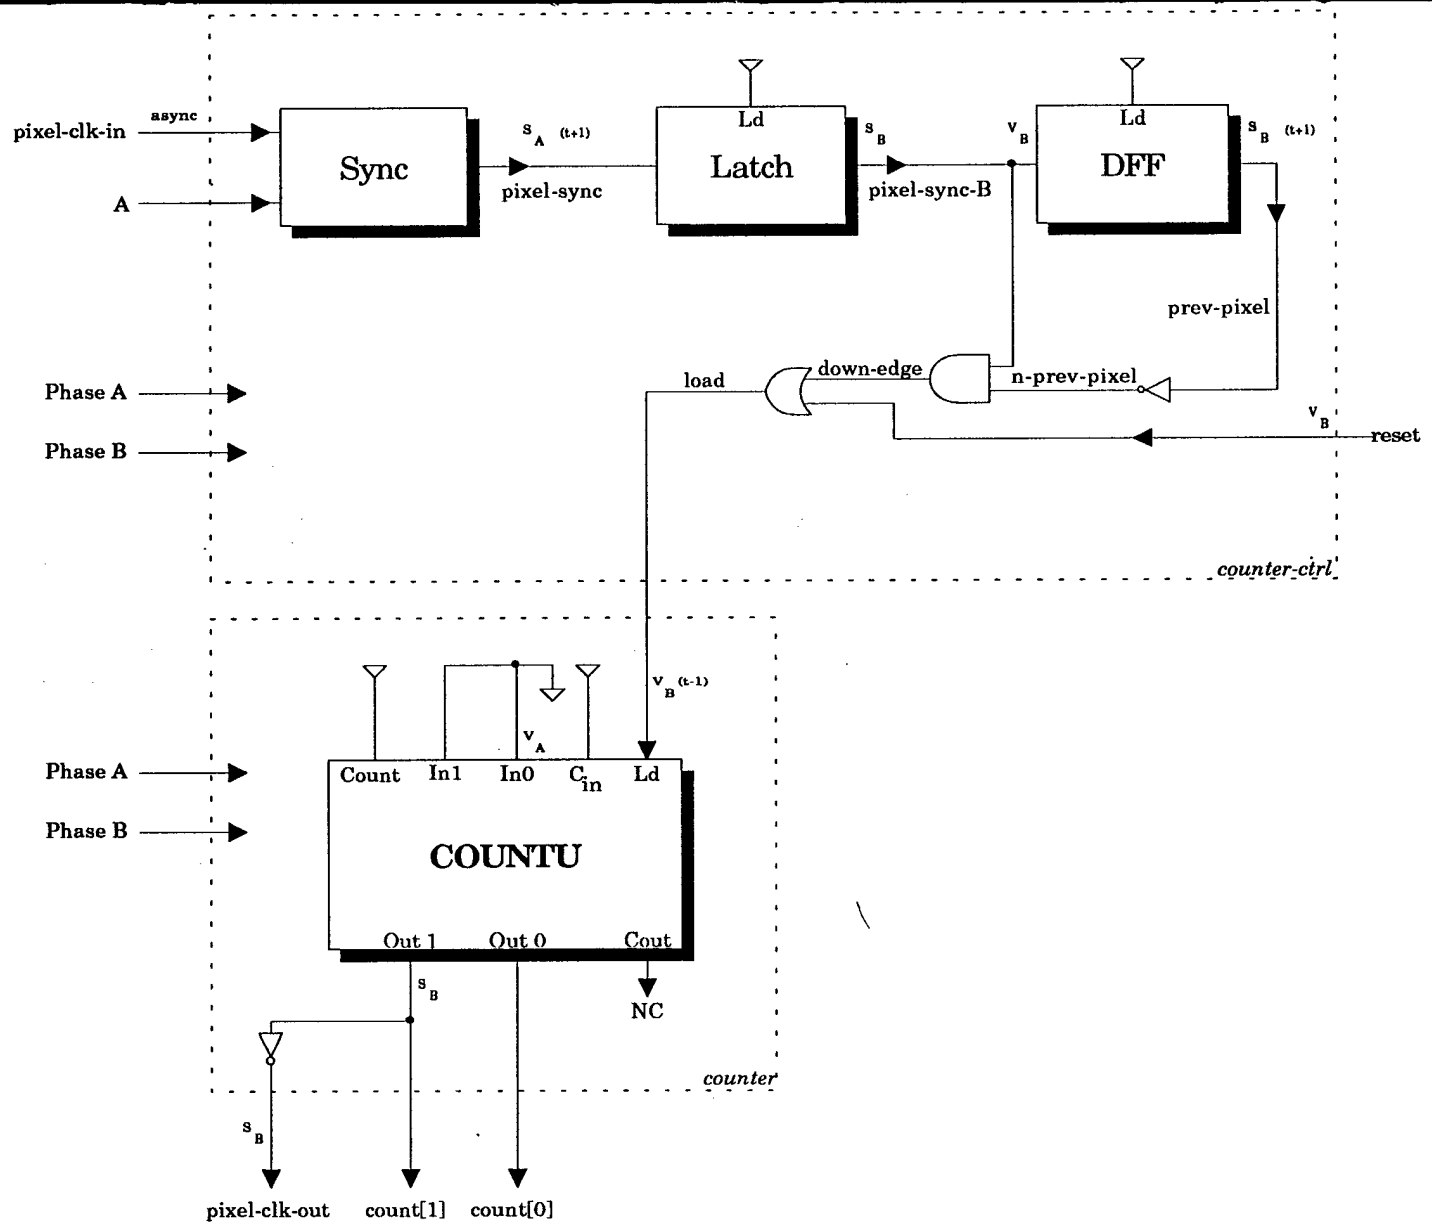

state-mach/clock-sync

Dos: d:\jackson\prem\clocksync.drw
Gen: <chip>/math/state-mach/clock-sync

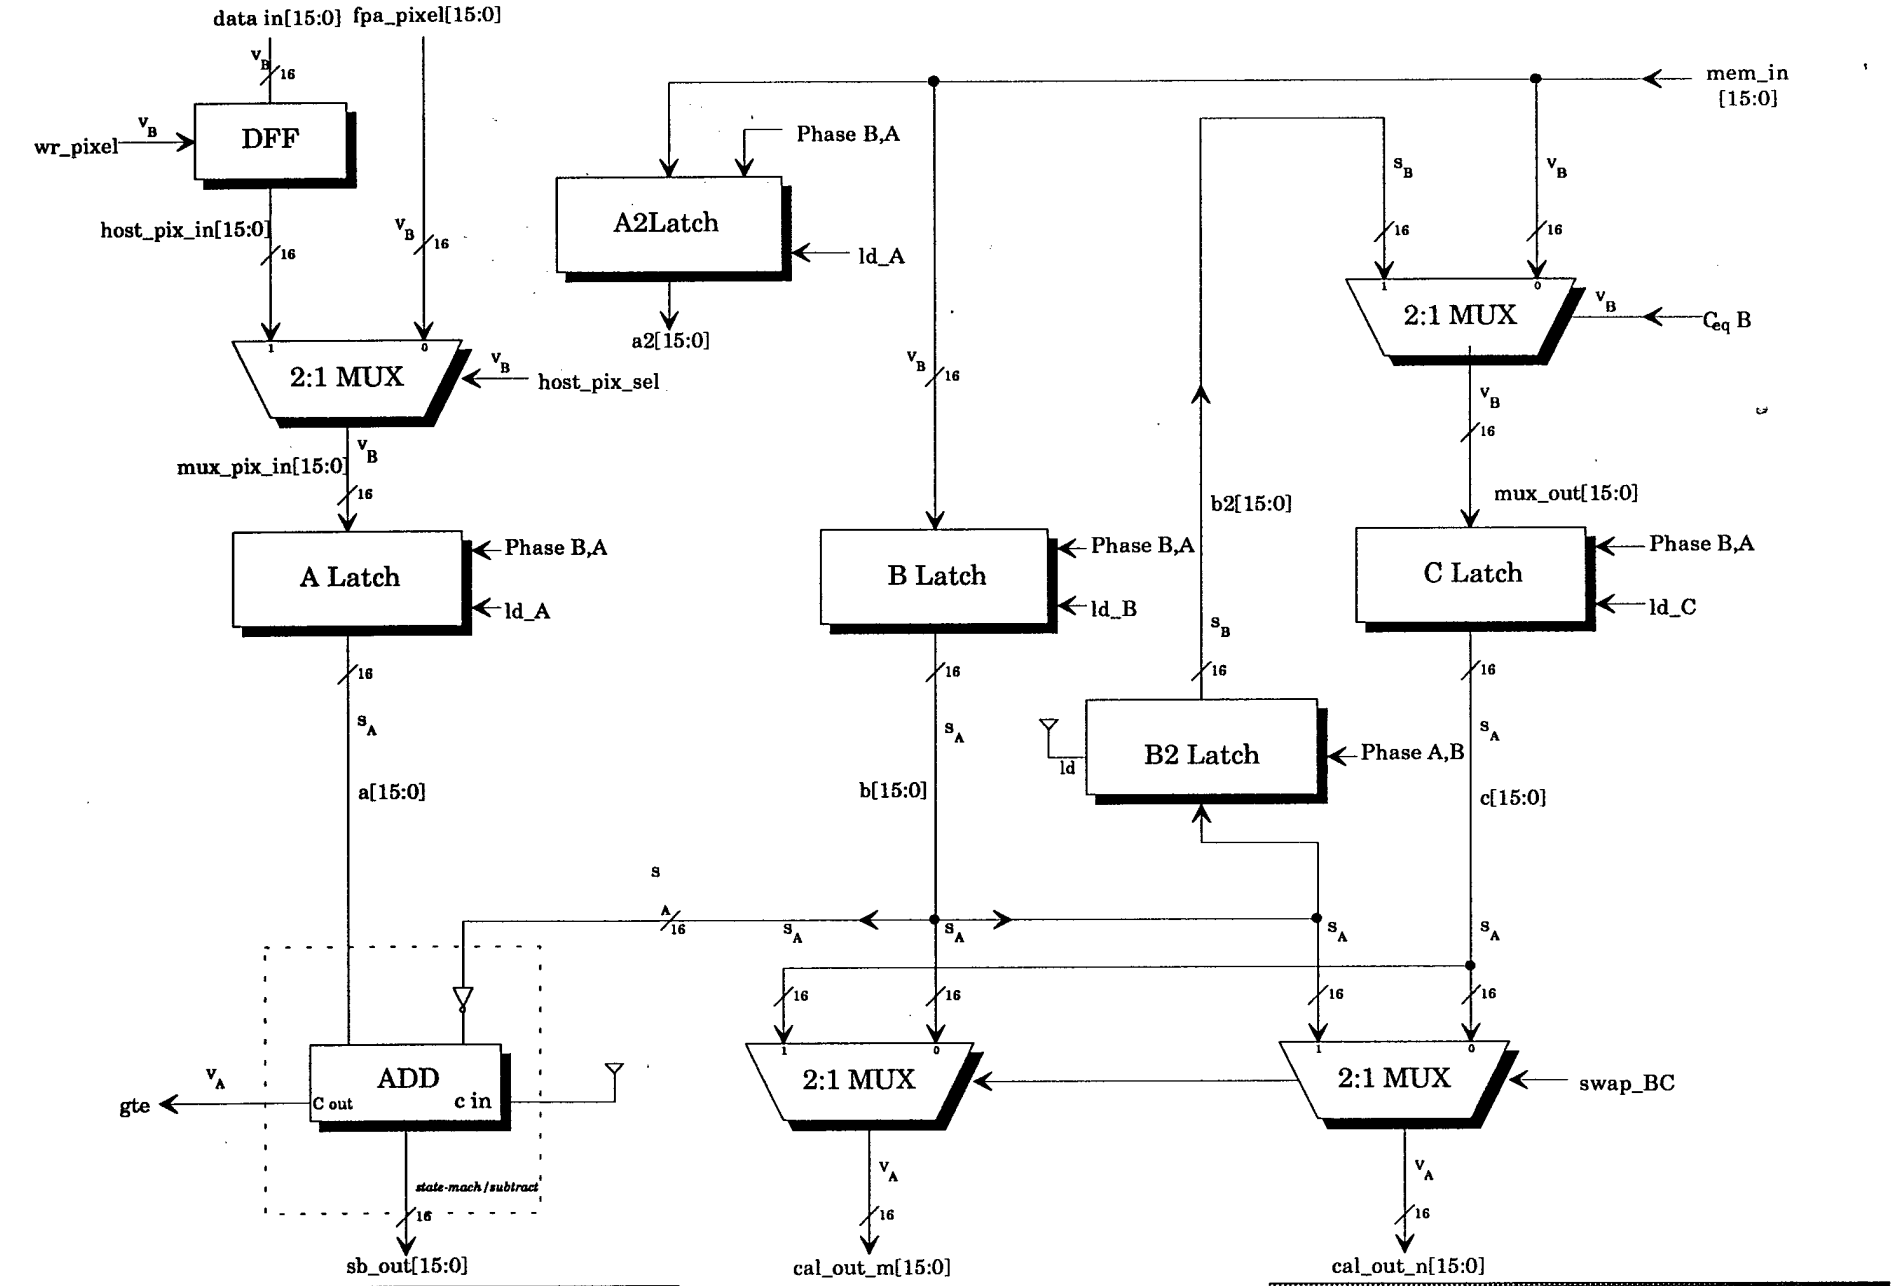

state-mach/cal_out_gen
state-mach/subtract

Dos: d:\jackson\prem\subtract.drw
Gen: <chip>/math/state-mach
<chip>/math/state-mach/subtract

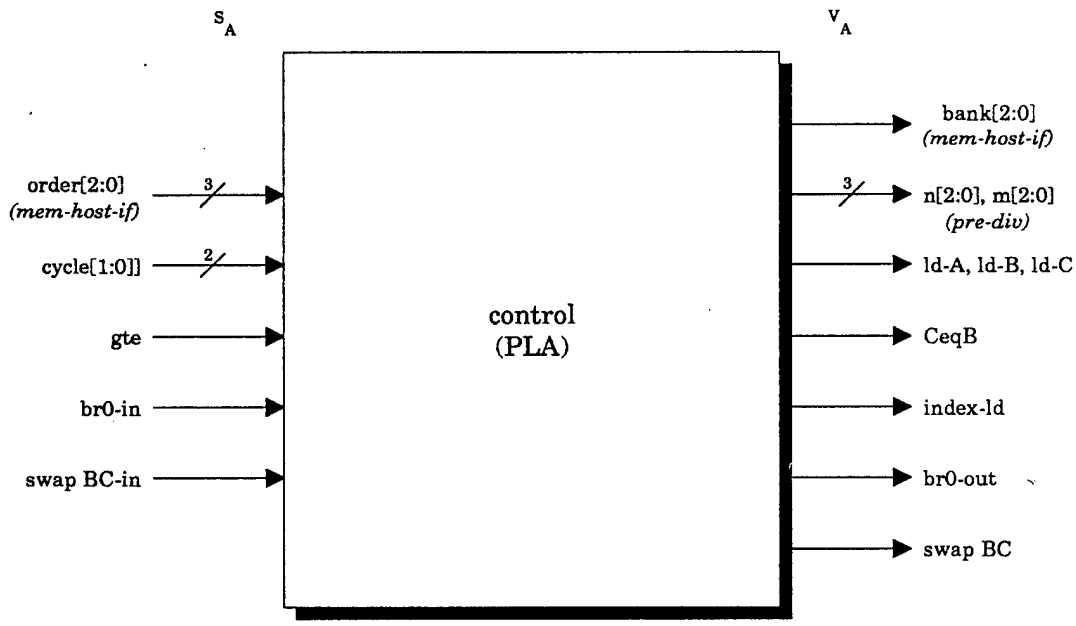

math/state-mach/control

Des: d:\jackson\prem\control.drw
Gen: <chips>/math/state-mach/control

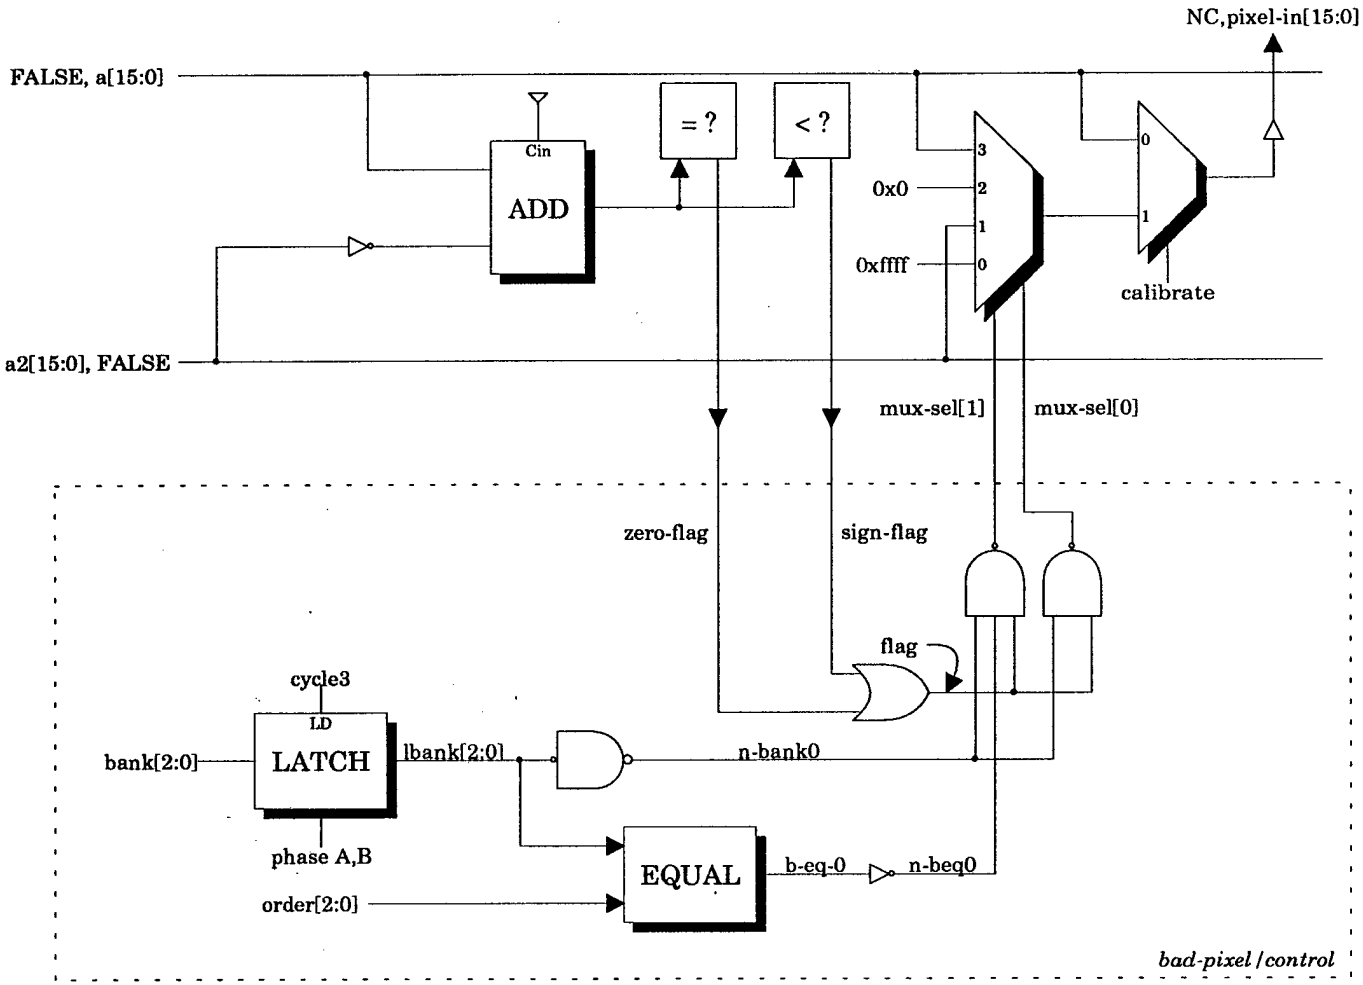

math/state-mach/bad-pixel

Dos: d:\jackson\prem\badpixel.drw
Gen: <chip>/math/state-mach/bad-pixel

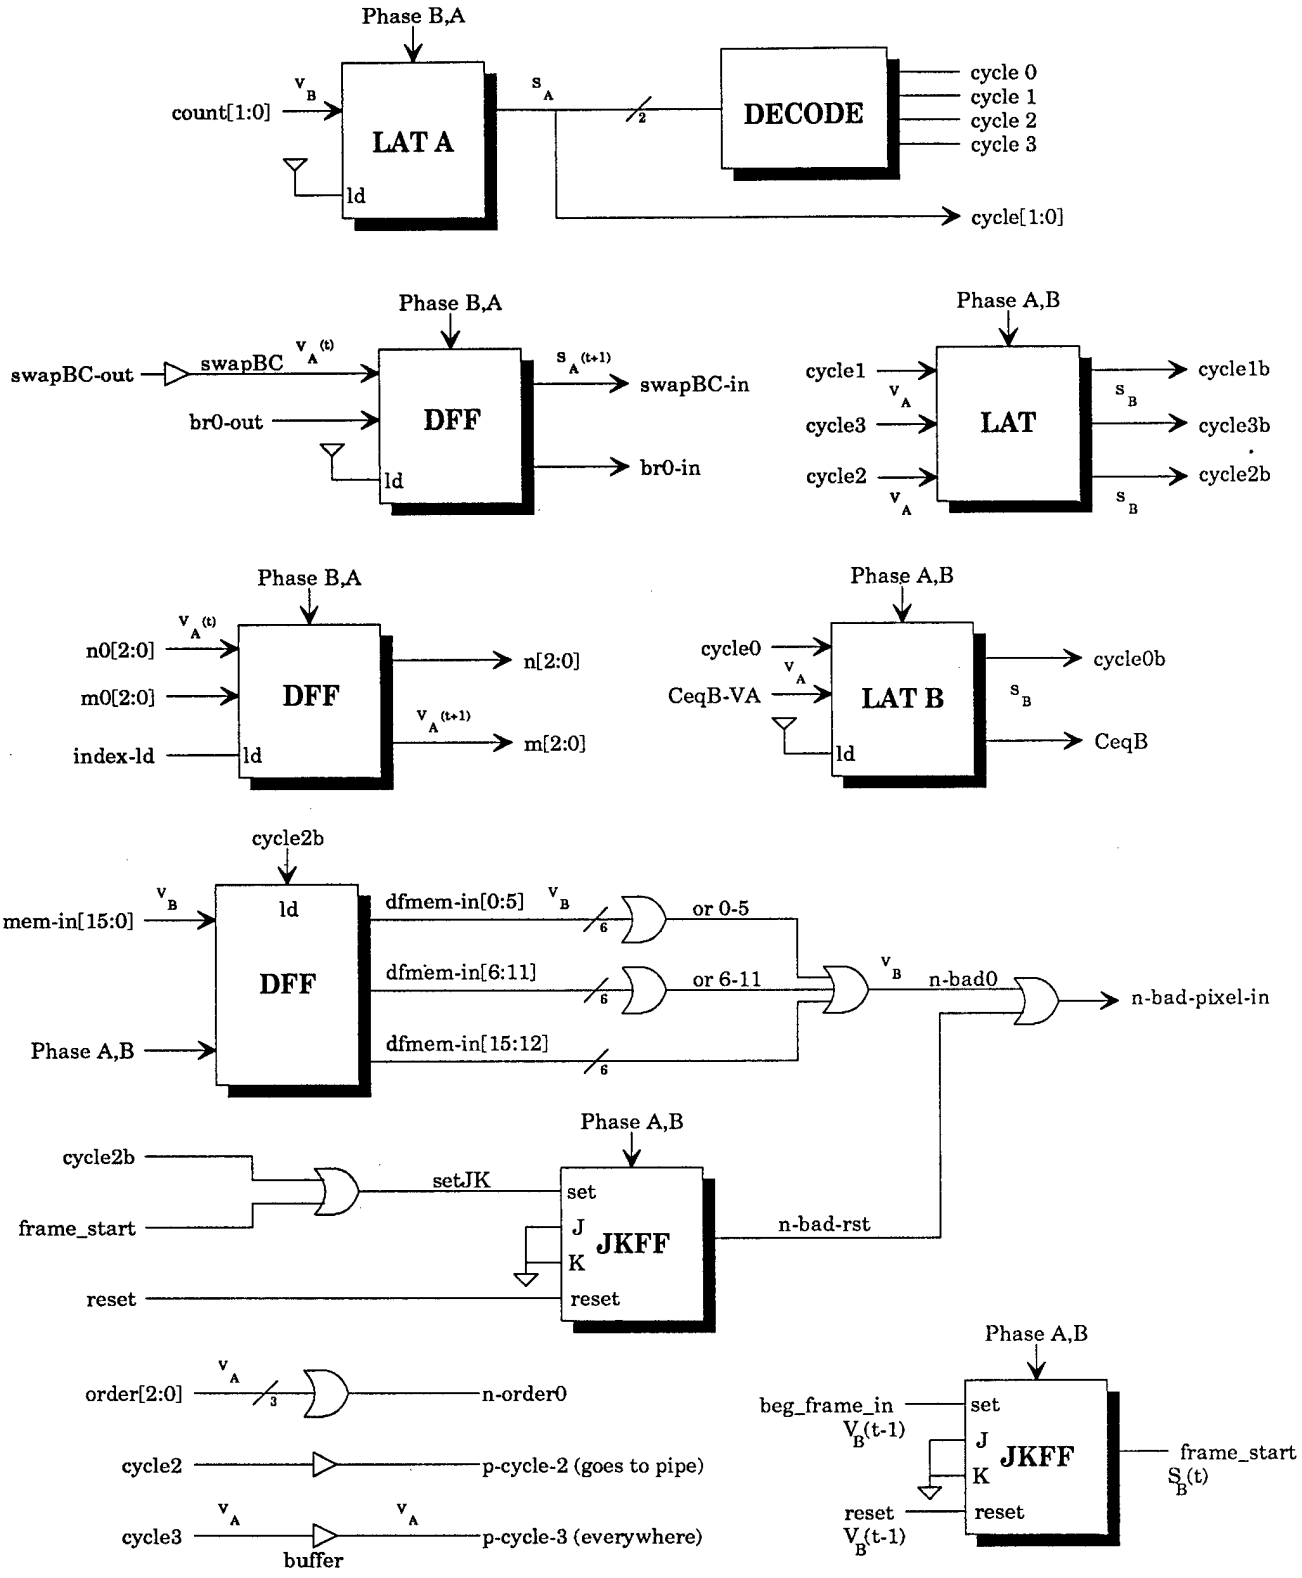

math/state-mach/glue

Dos: d:\jackson\prem\glue.drw
Gen: <chip>/math/state-mach
<chip>/math/state-mach/glue

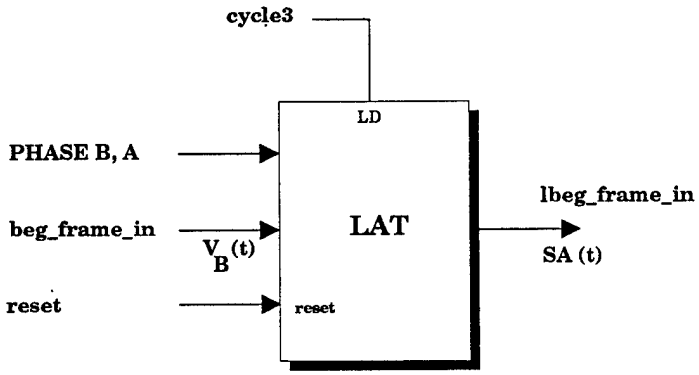

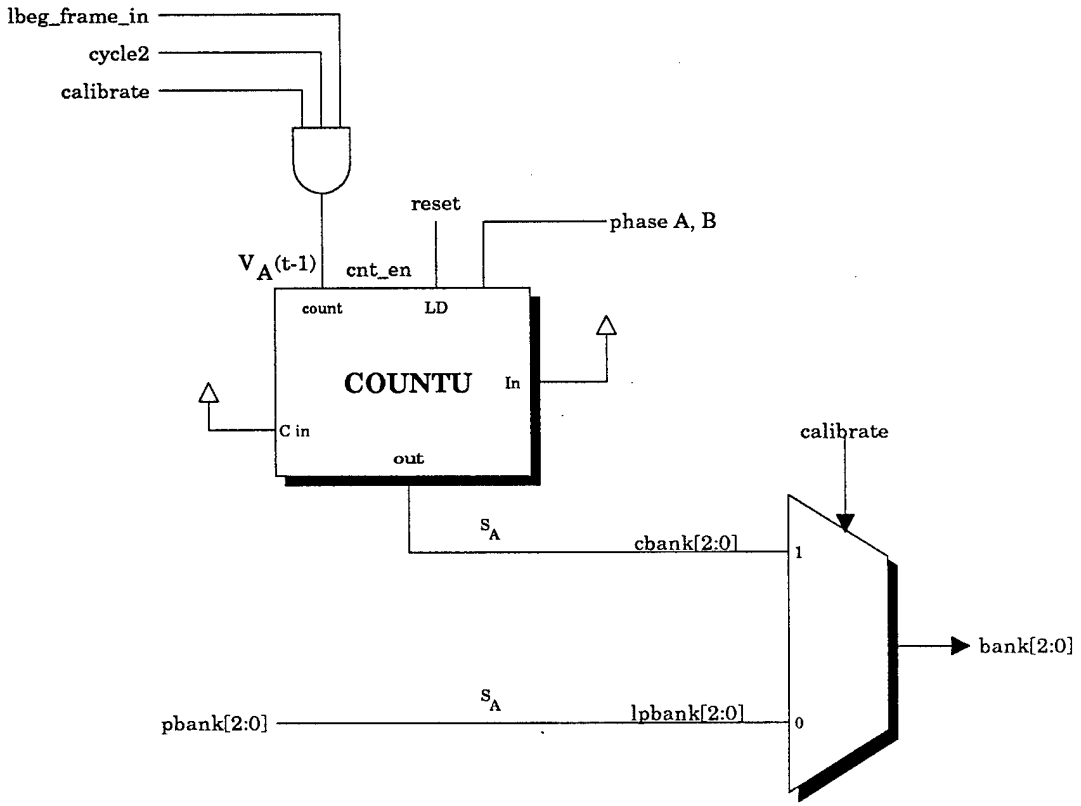

state_mach/glue

Dos: d:\jackson\prem\glue2.drw
Gen: <chip>/math/state_mach/glue

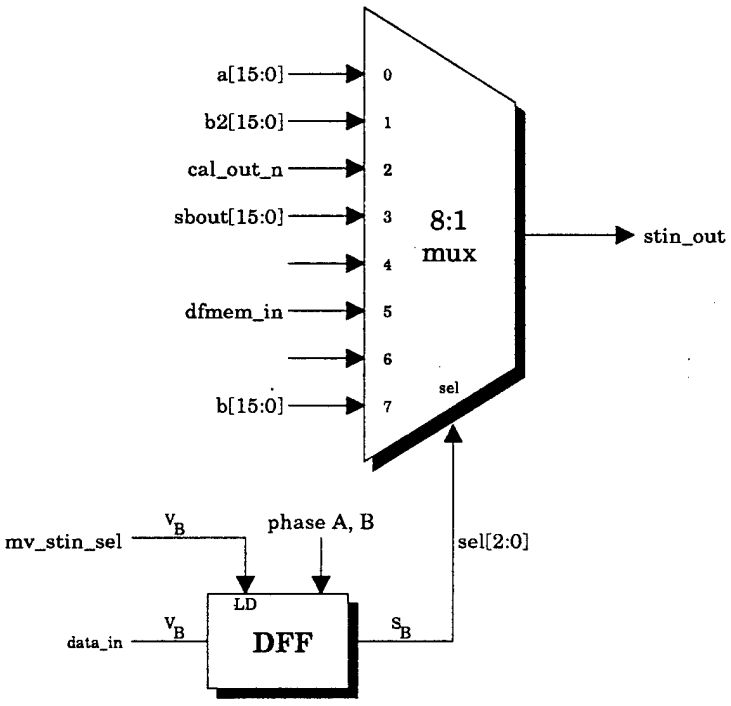

state_mach/glue

Dos: d:\jackson\prem\glue1.drw
Gen: <chip>/math/state_mach/glue

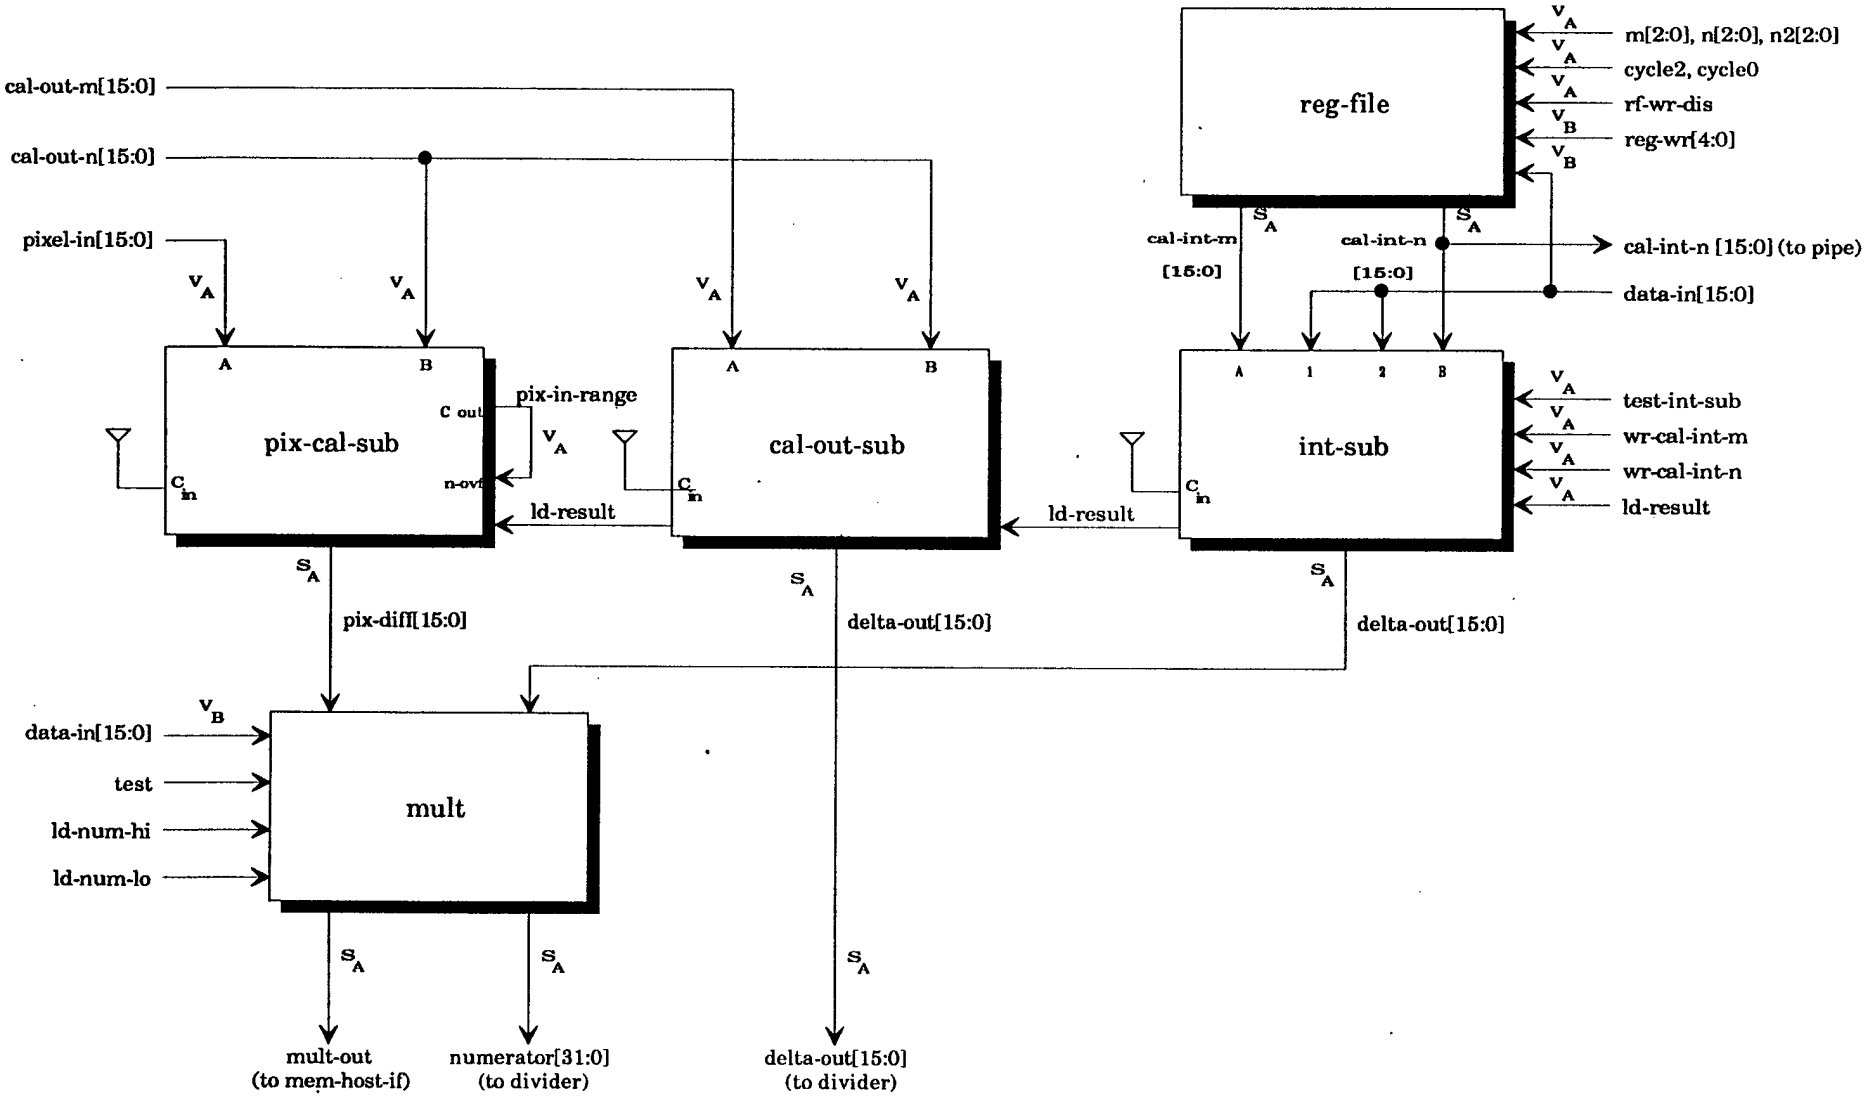

nuc/math/pre-div

Dos: d:\jackson\prem\prediv.drw
Gen: <chip>/math/pre-div

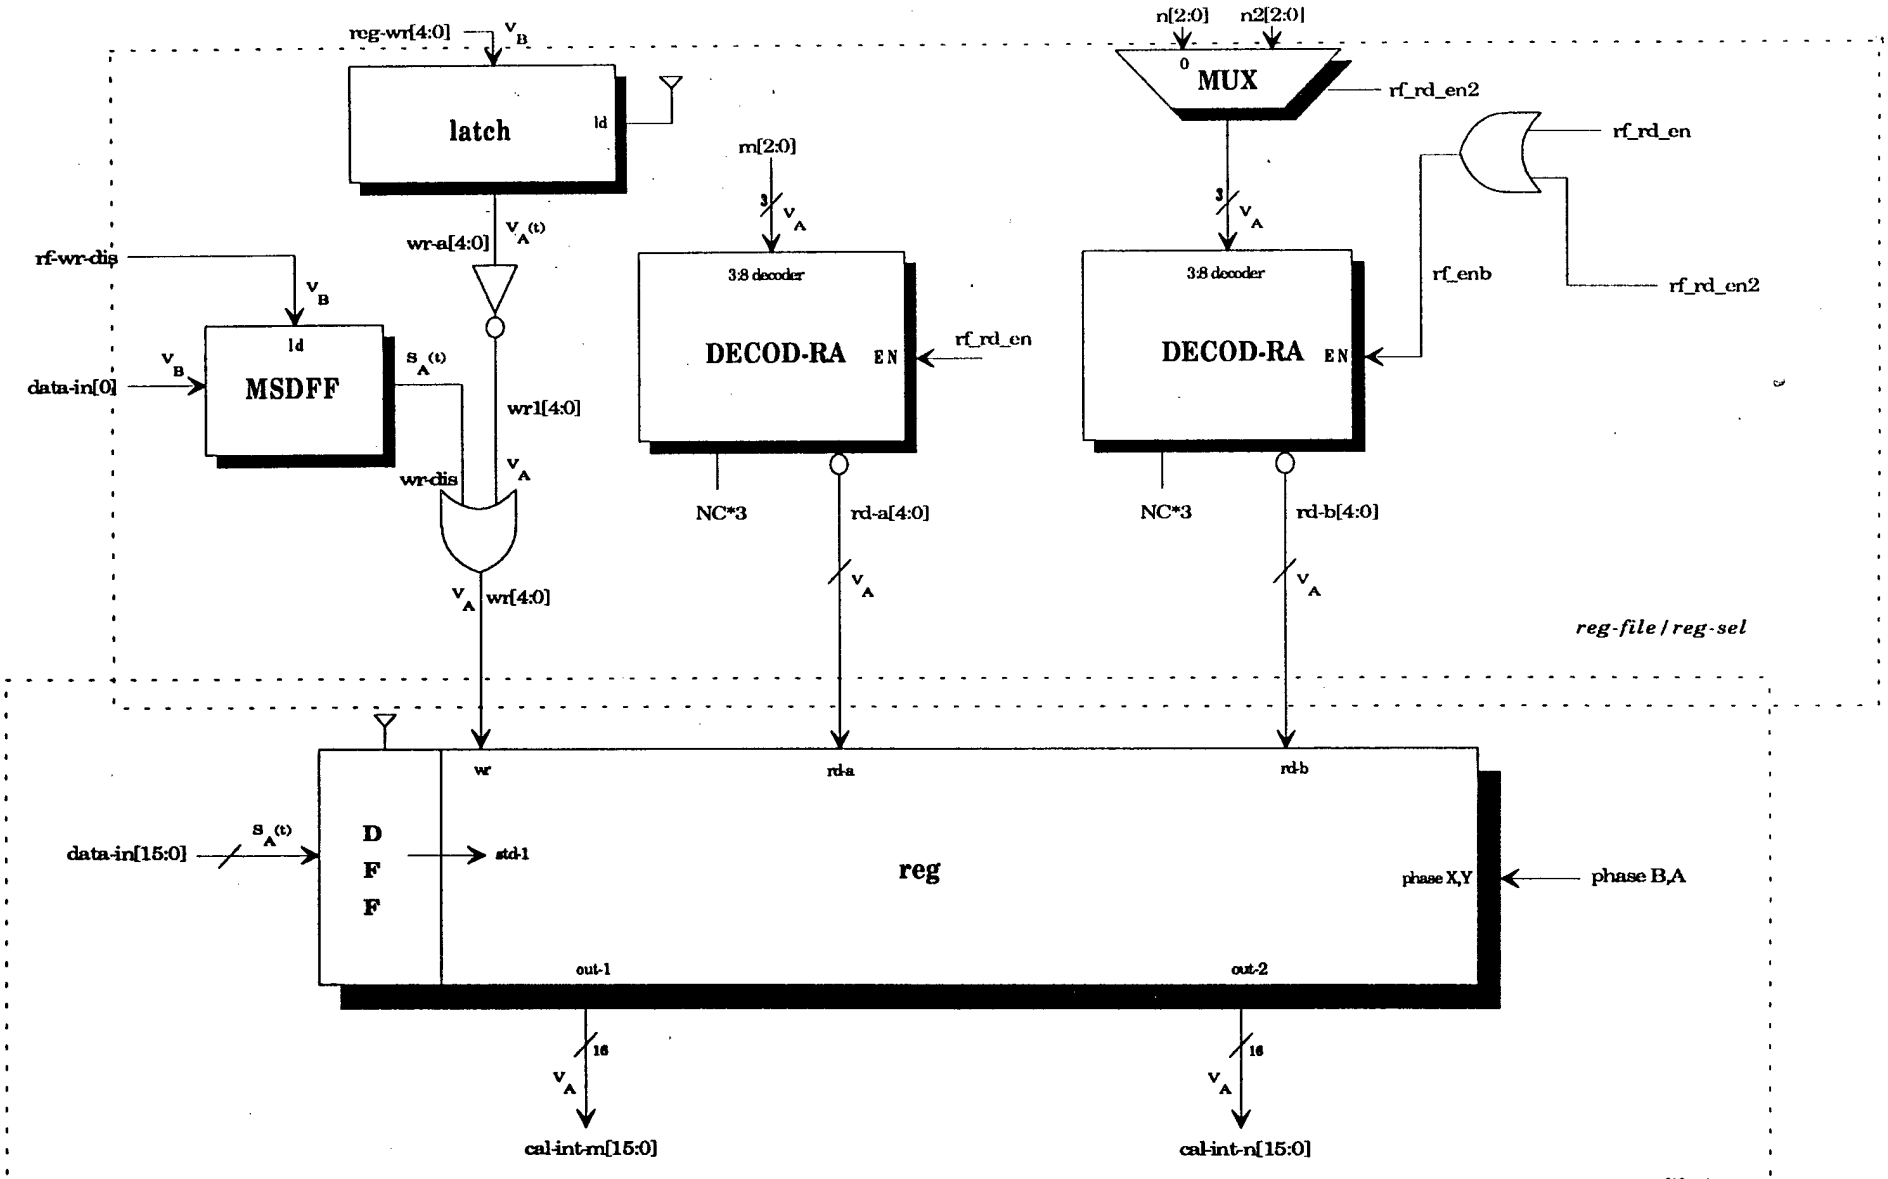

pre-div/reg-file

Dos: d:\jackson\prem\regfile.drw
Gen: <chip>/math/prediv
<chip>/math/prediv/reg-file

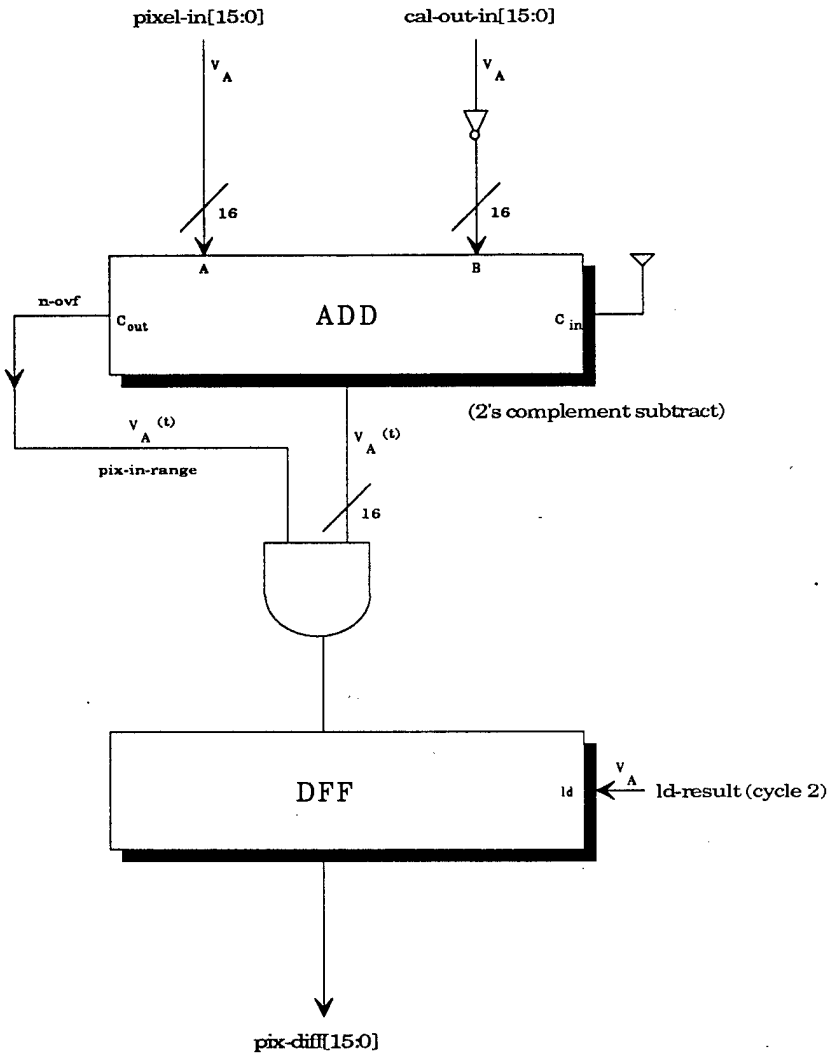

pre-div/pix-cal-sub

Dos: d:\jackson\prem\pixcal.drw
Gen:<chip>/math/pre-div
<chip>/math/pre-div/pixcal-sub

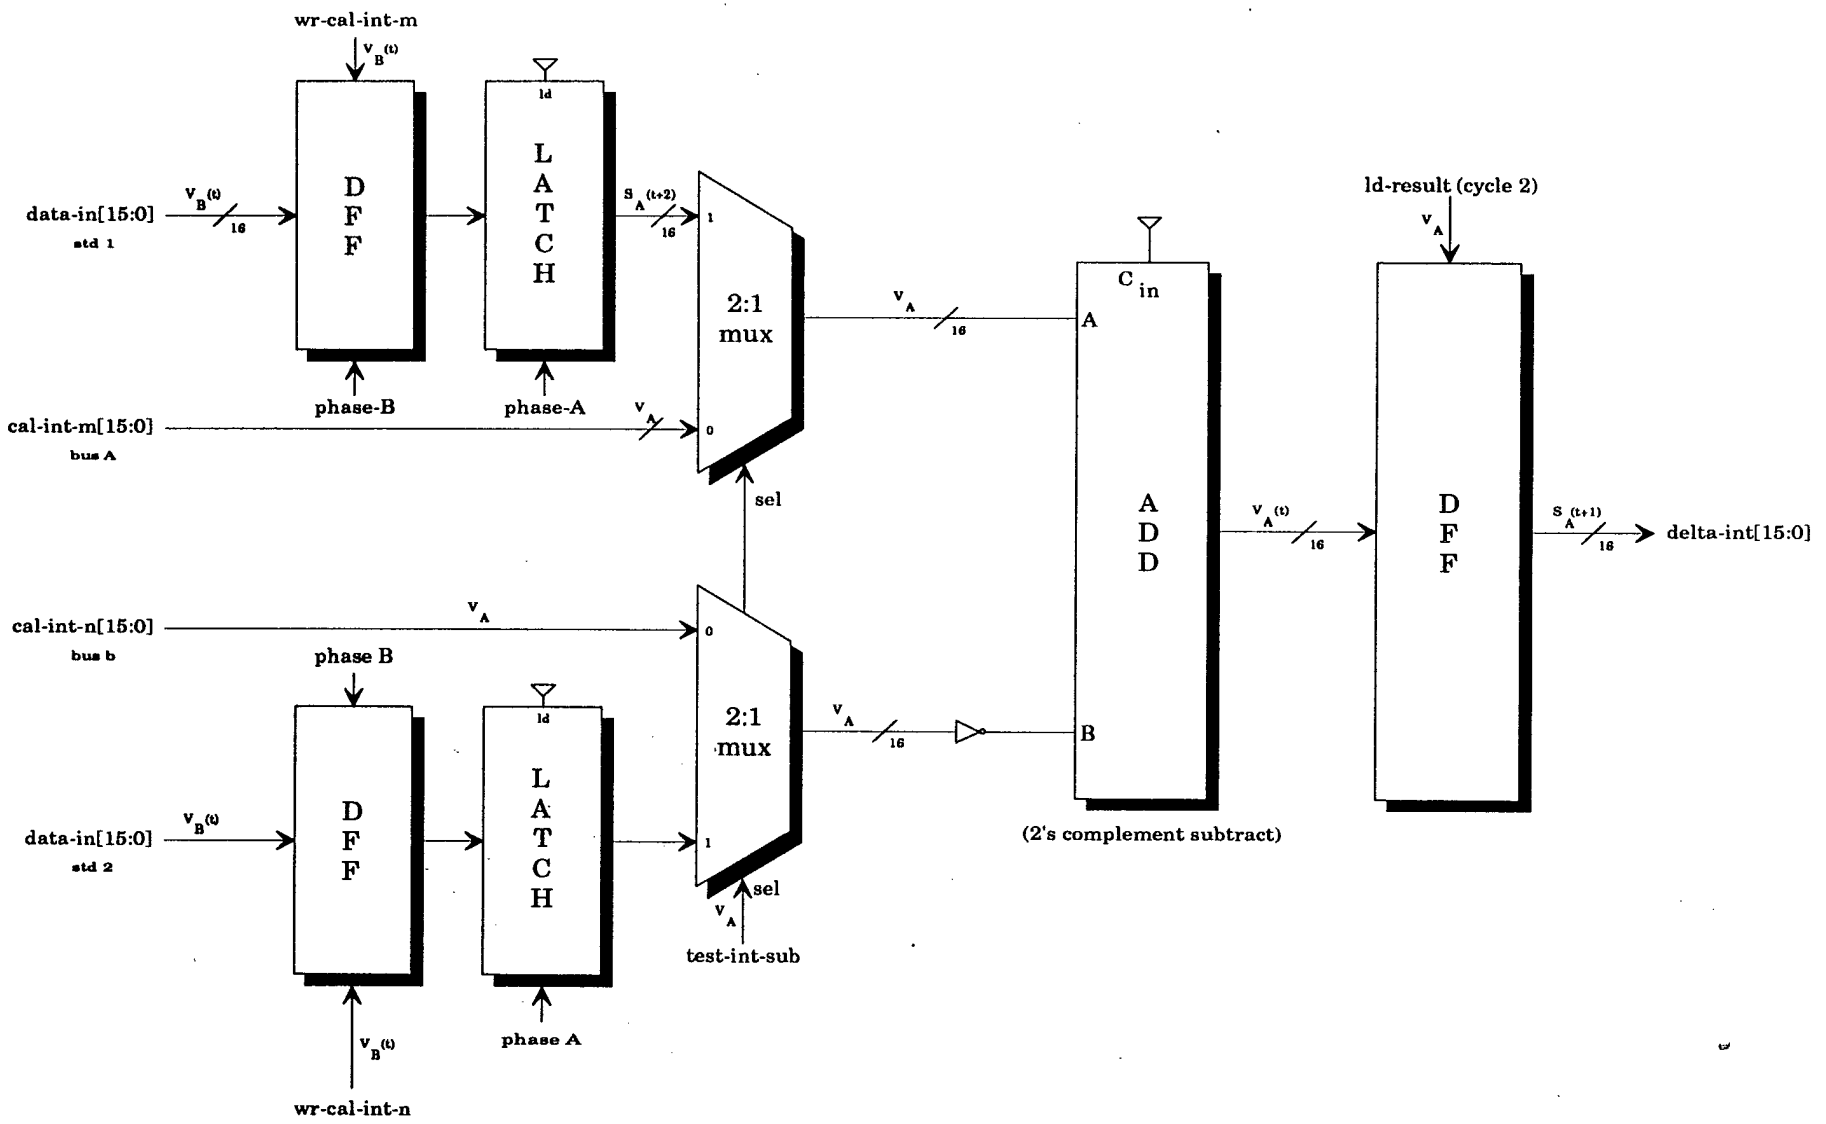

pre-div/int-sub

Dos: d:\jackson\prem\intsub.drw
Gen: <chip>/math/pre-div
<chip>/math/pre-div/int-sub

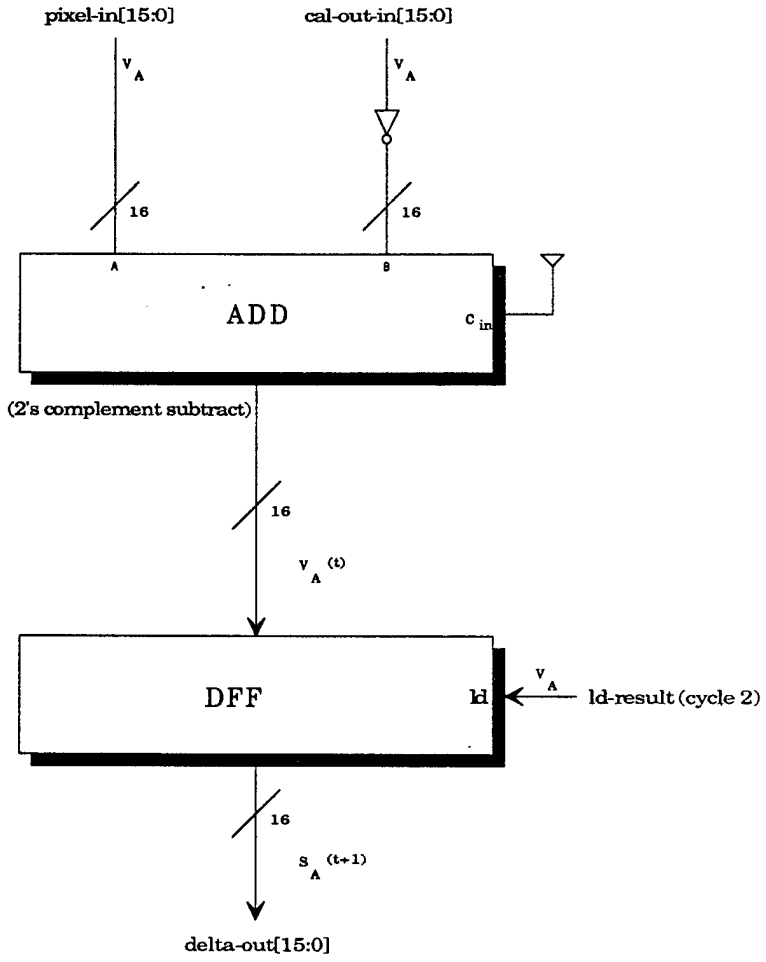

pre-div/cal-out-sub

Dos: d:\jackson\prem\calout.drw
Gen: <chip>/math/pre-div
<chip>/math/pre-div/cal-out-sub

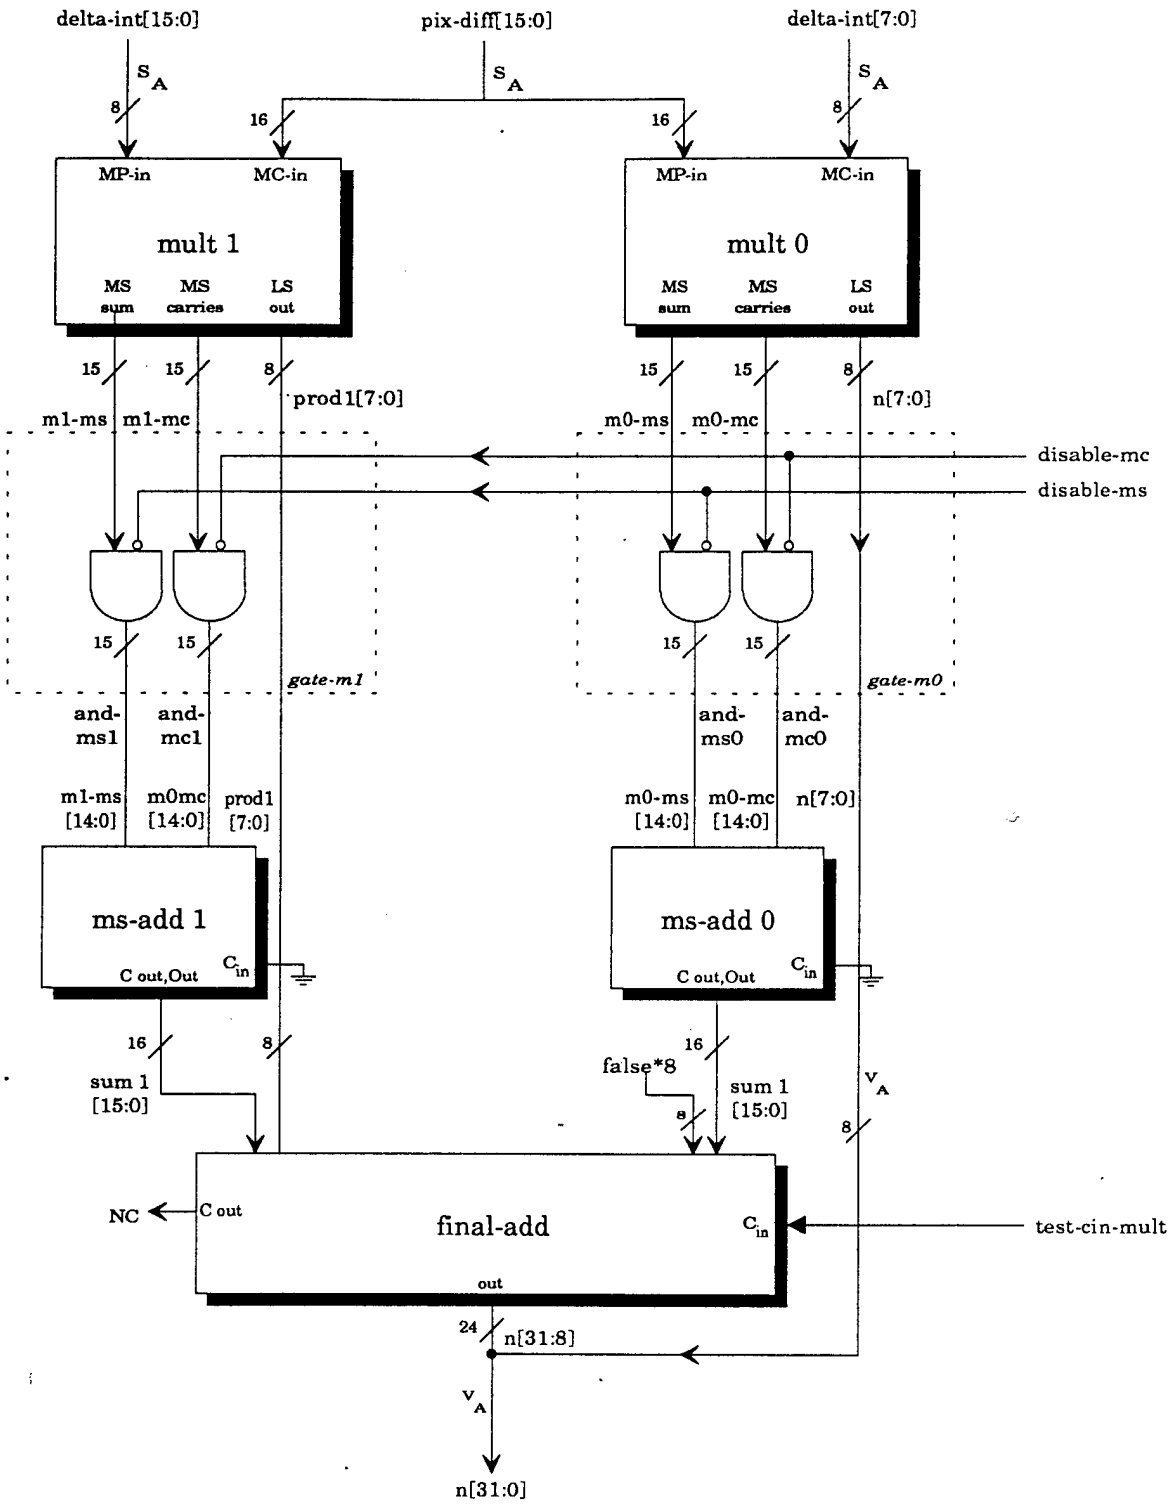

pre-div/mult/mult-block

Dos: d:\jackson\prem\mult.drw
Gen: <chips/math/pre-div/mult/mult-block

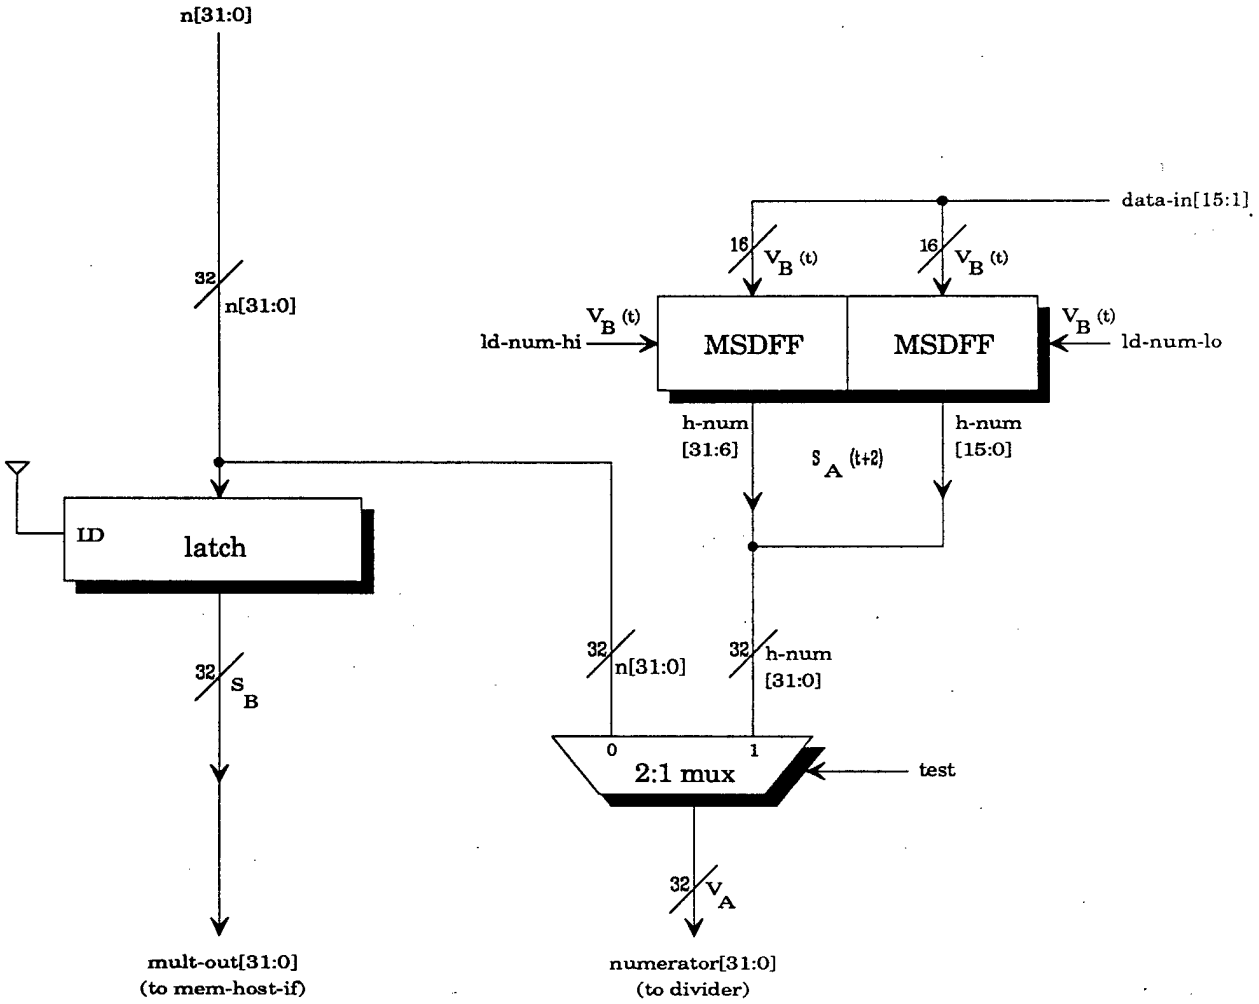

pre-div/mult/mult-out

Dos: d:\jackson\prem\mult.drw
Gen: <chips/math/pre-div/mult/mult-block

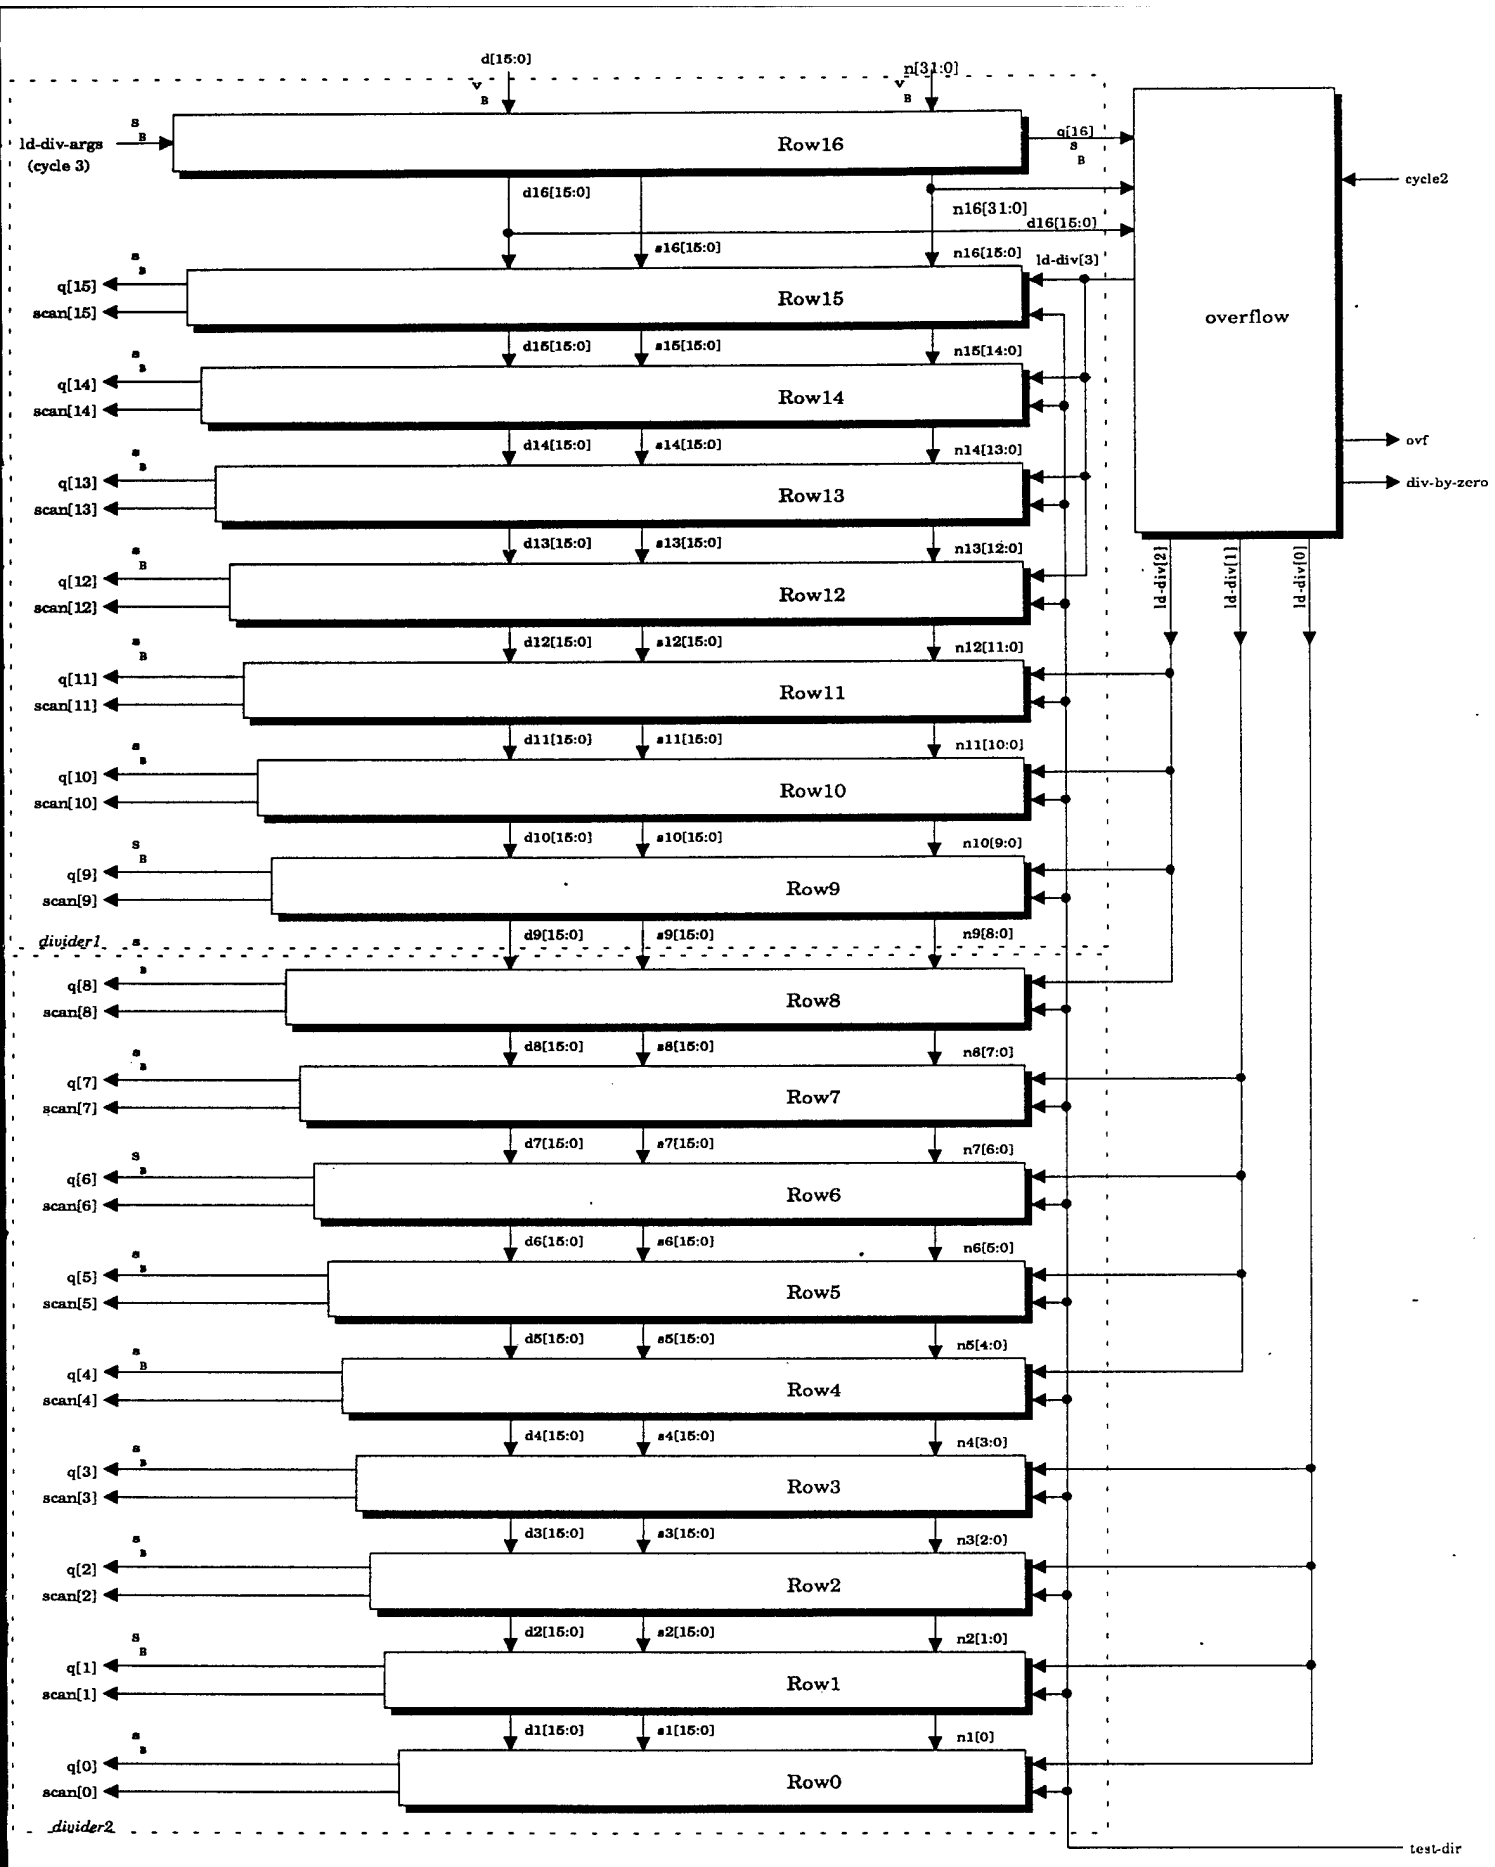

divider pipeline

Doc: d:\jackson\prem\divider1.drw
Gen: <chip>/math/divider

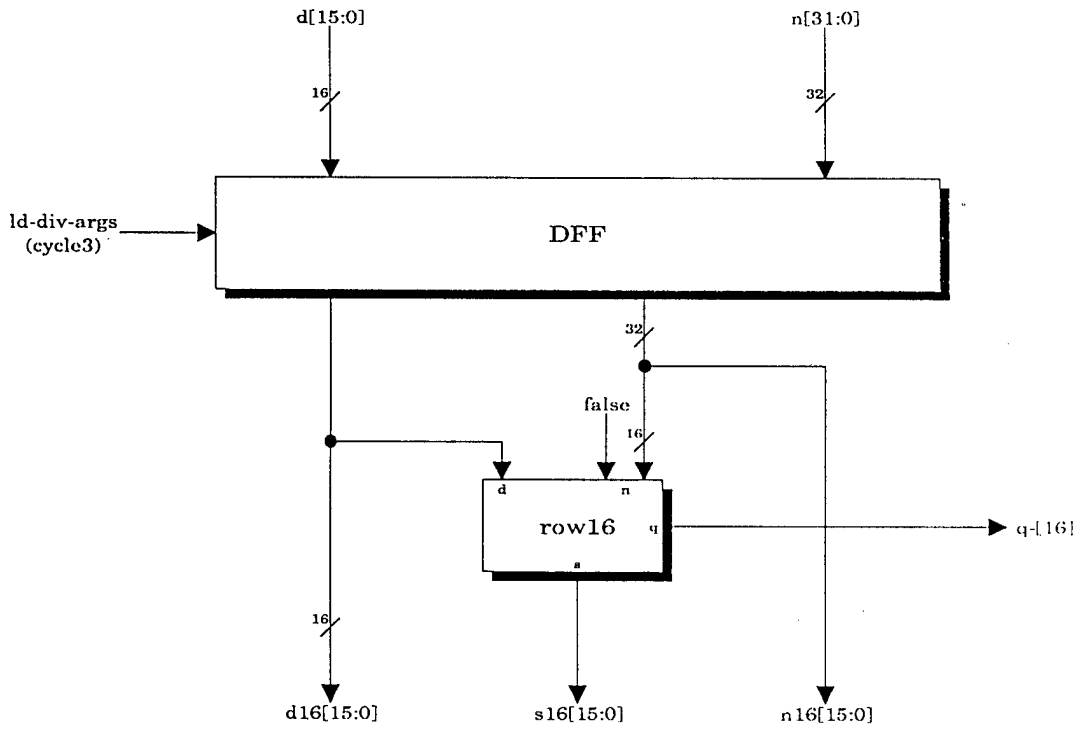

math/divider1 divider2/row16

Dsn: d:\jackson\prem\row16.drw
Gen: <chips/math/divider/row16

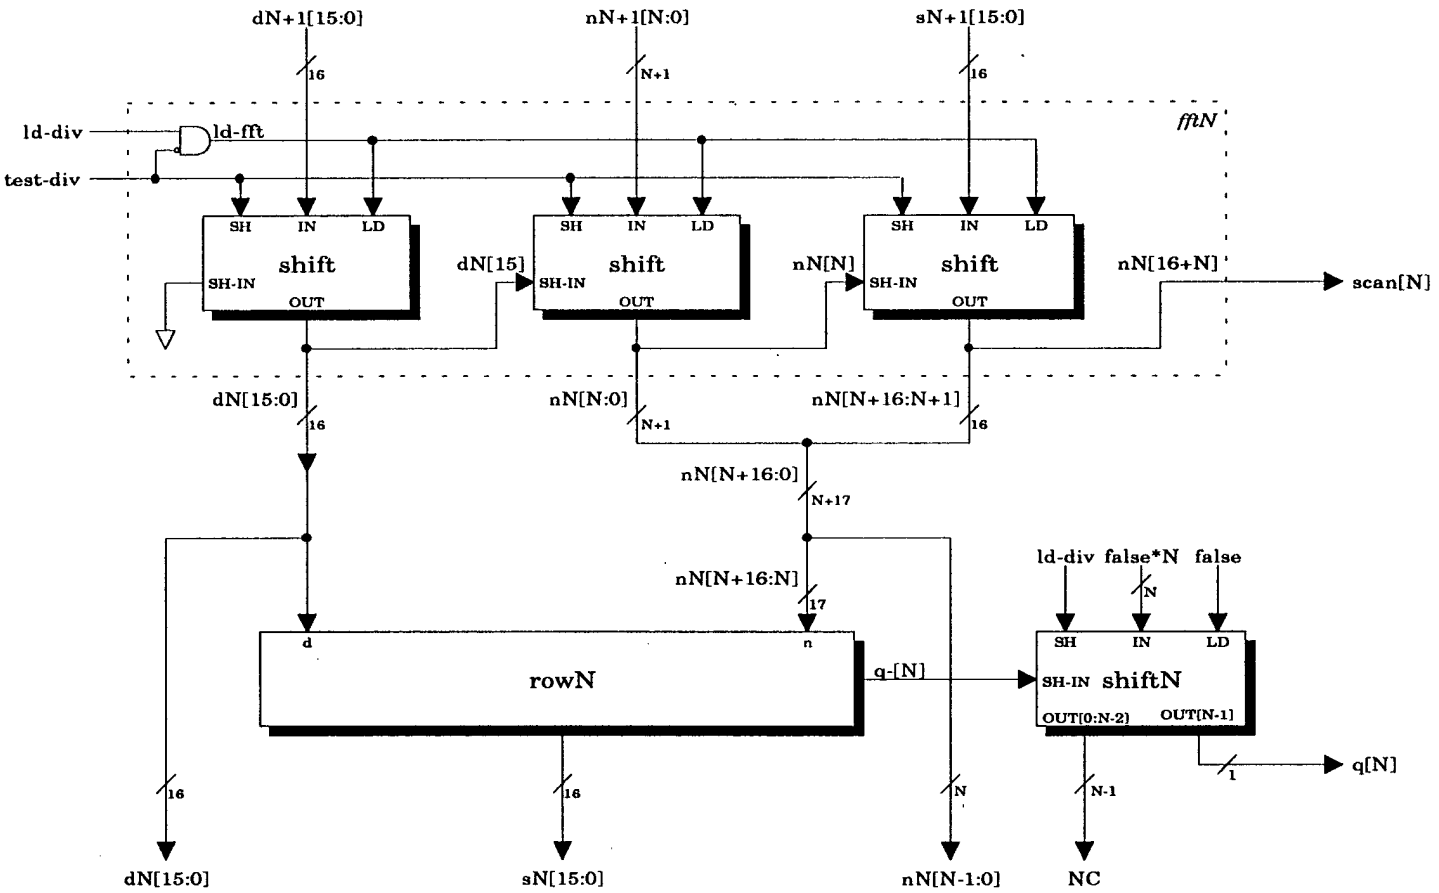

math/divider1 divider2/RowN

(N = 0..15)

Dos: d:\jackson\prem\rown0-15.drw
Gen: <chip>/math/divider/Row[15..0]

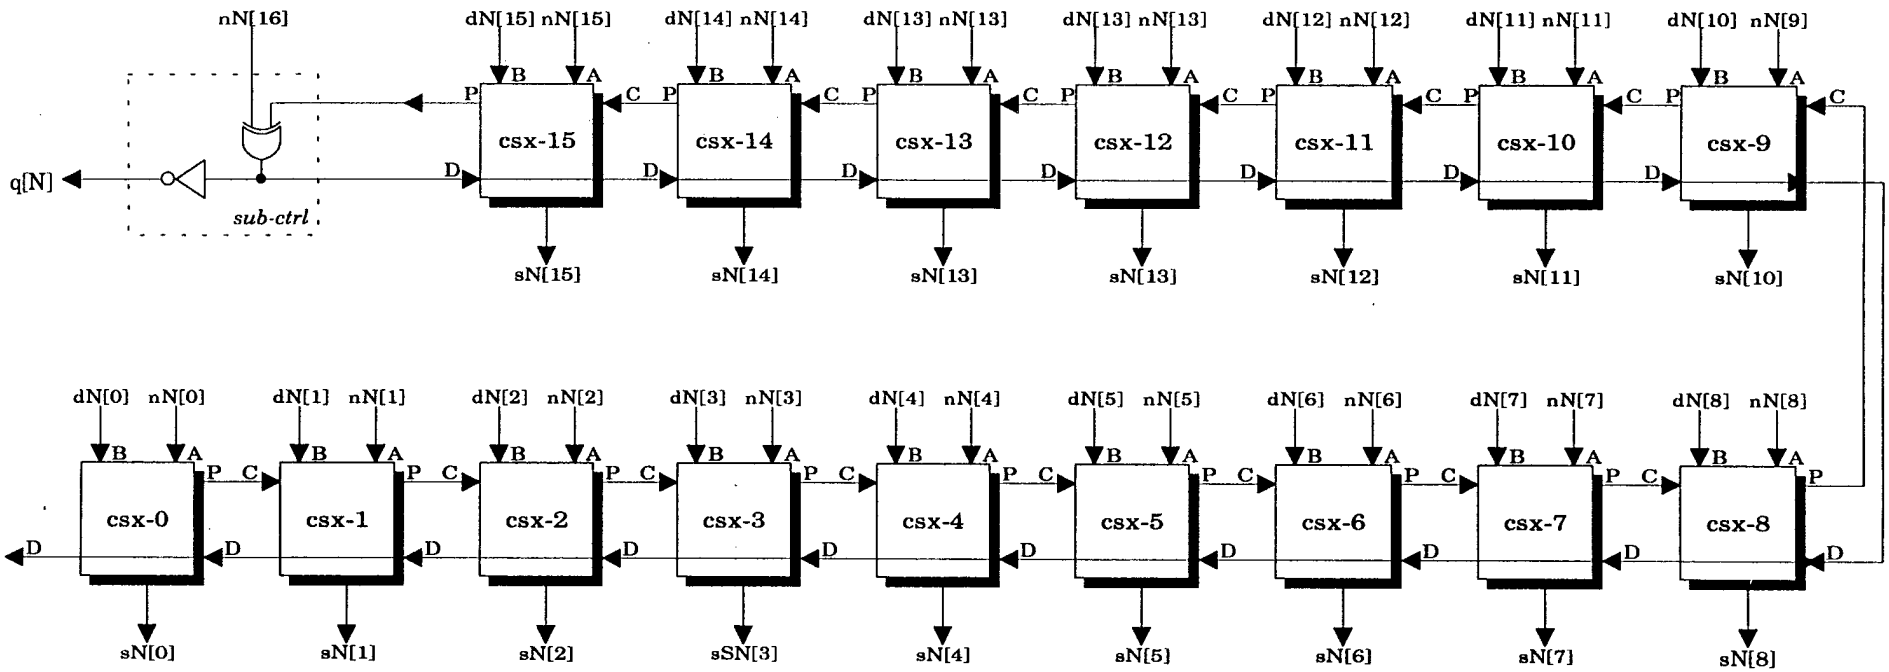

divider1
divider2 / **RowN/rowN**

Dos: d:\jackson\prem\rown.drw
Gen: <chip>/math/divider/Row[16..0]/row[16..0]

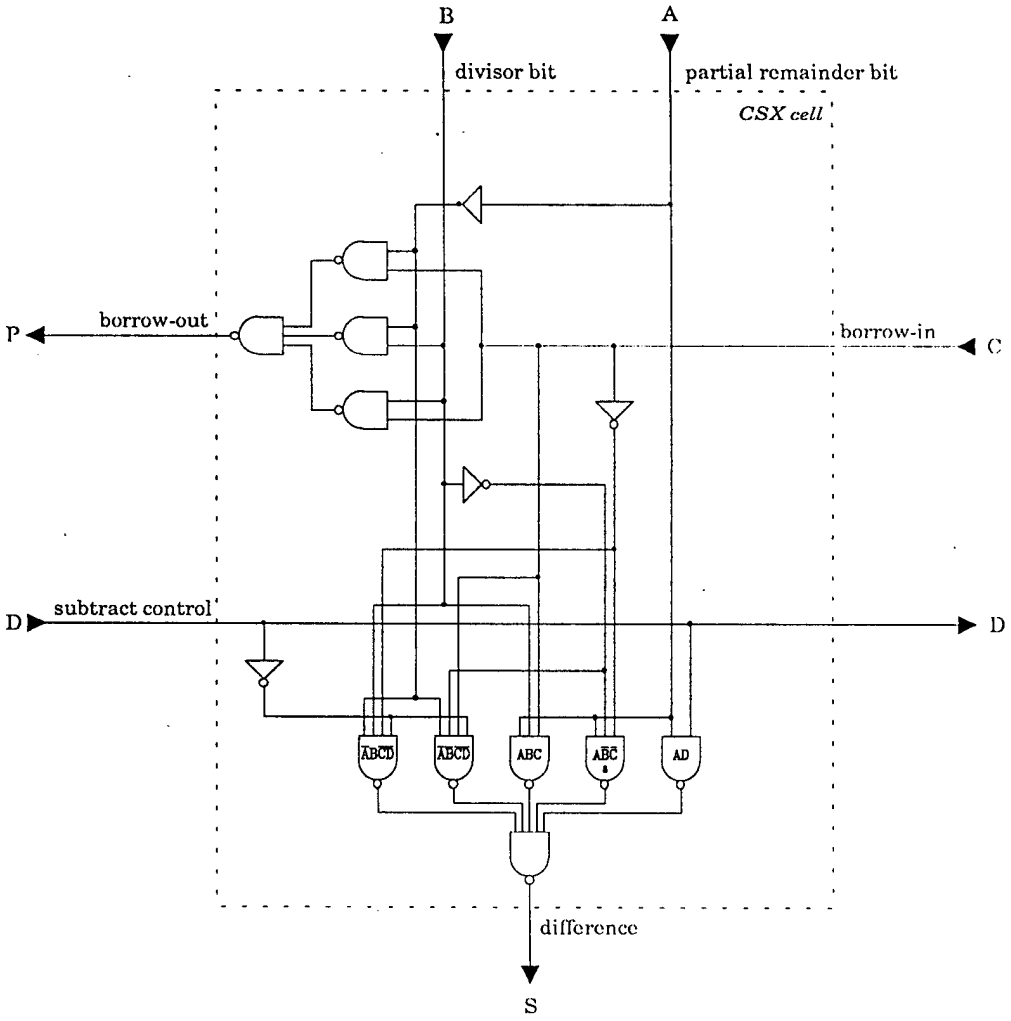

divider1 / RowN/rowN/csx-M
divider2
(N=0..16, M=0..15)

Dos: d:\jackson\prem\csx.drw
Gen: <chip>/math/divider/Row[16..0]/row[16..0]/csx-[15..0]

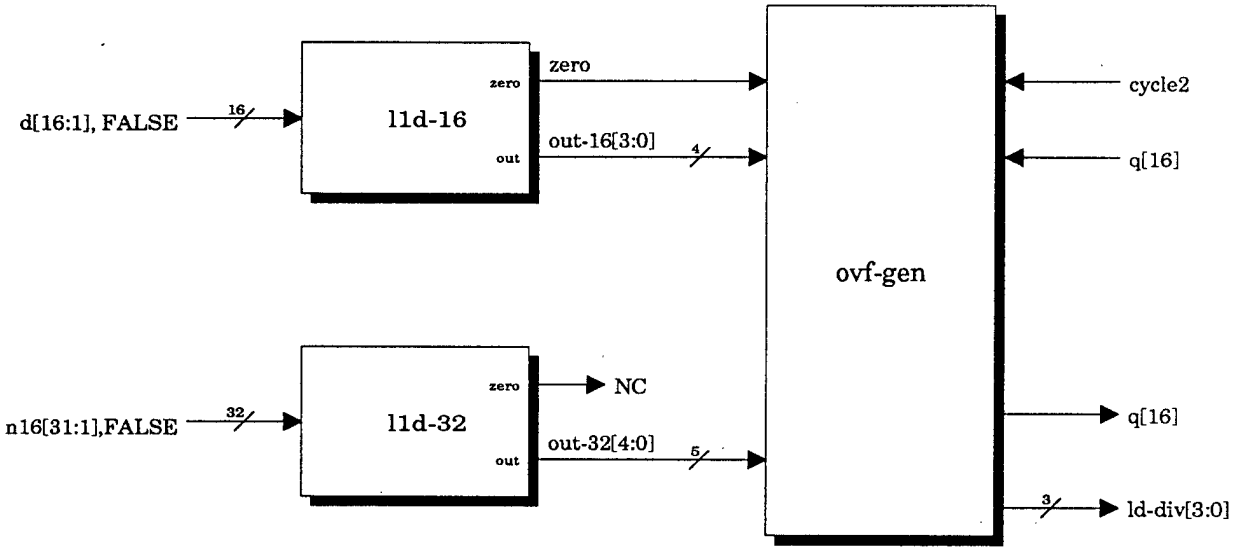

math/overflow

Dos: d:\jackson\prem\overflow.drw
Gen: <chip>/math/divider/overflow

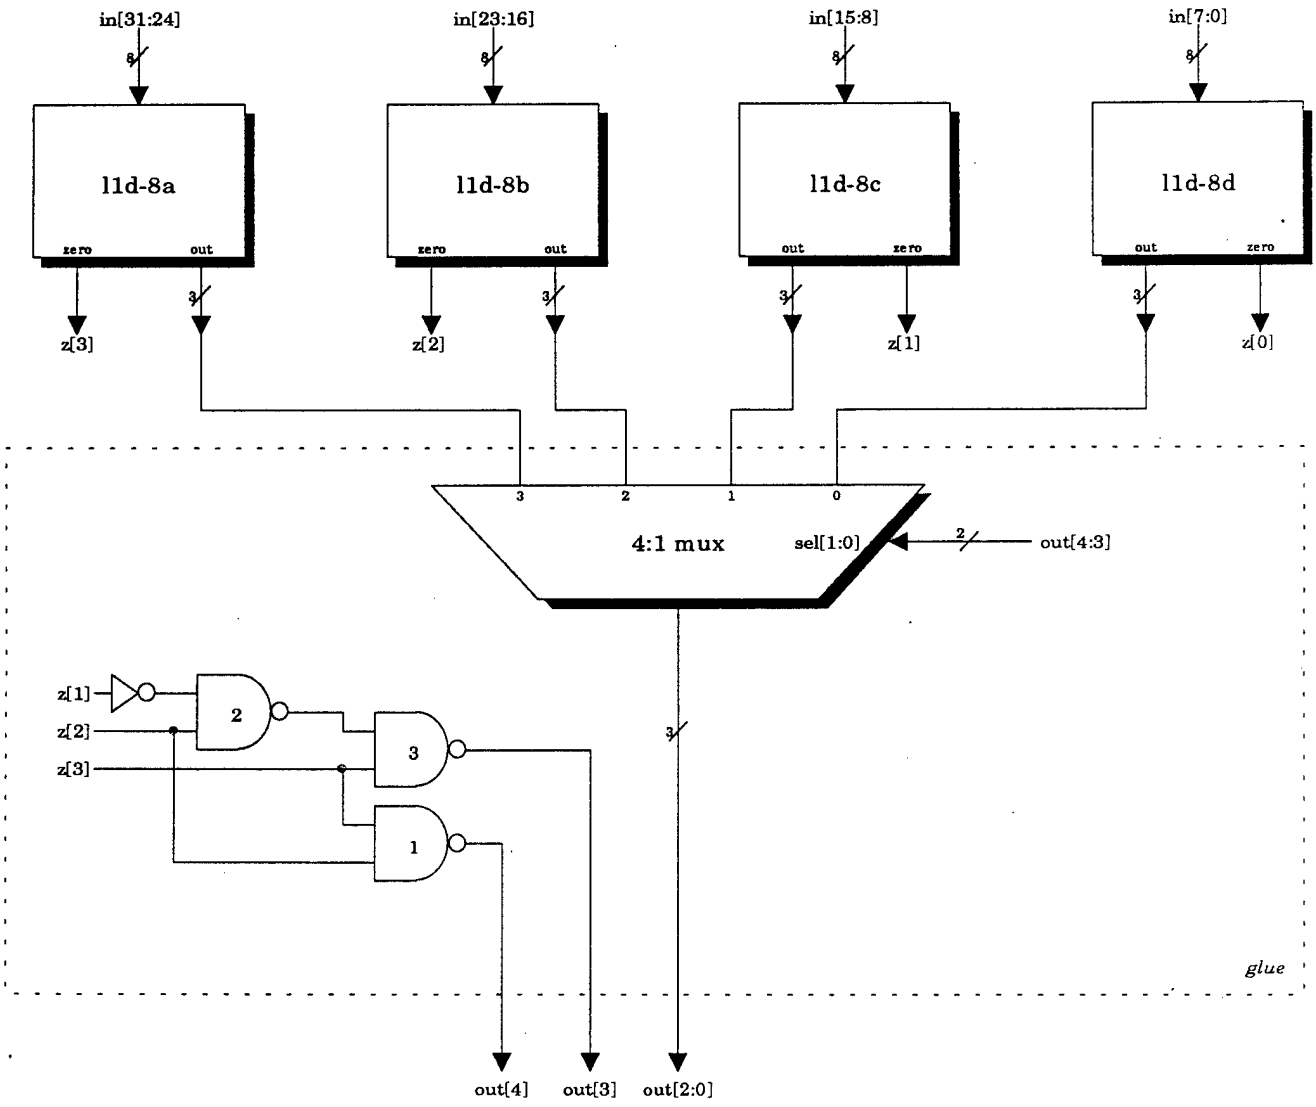

overflow/l1d-32

Dos: d:\jackson\prem\l1d32.drw
Gen: <chip>/divider/overflow/l1d-32

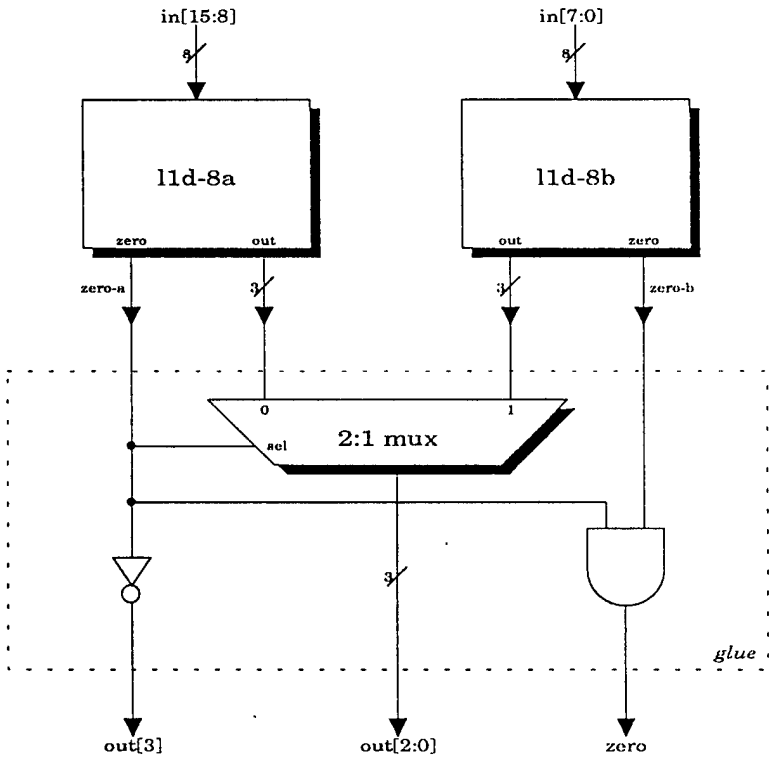

overflow/l1d-16

Dos: d:\jackson\prem\l1d16.drw
Gen: <chips>/divider/overflow/l1d-16

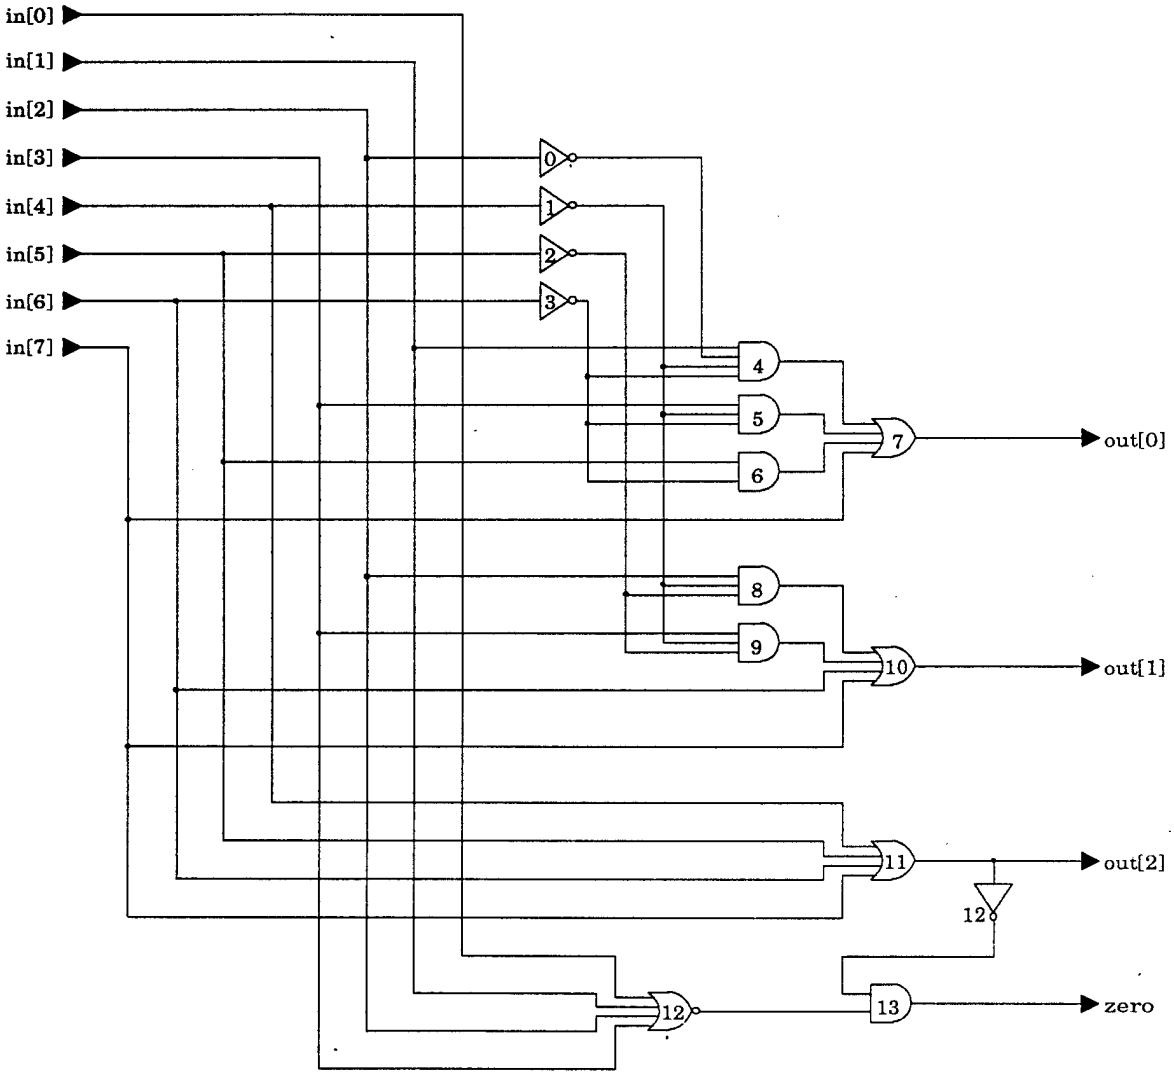

l1d-32/l1d-8x, l1d-16/l1d-8x

(8-bit leading one detector)

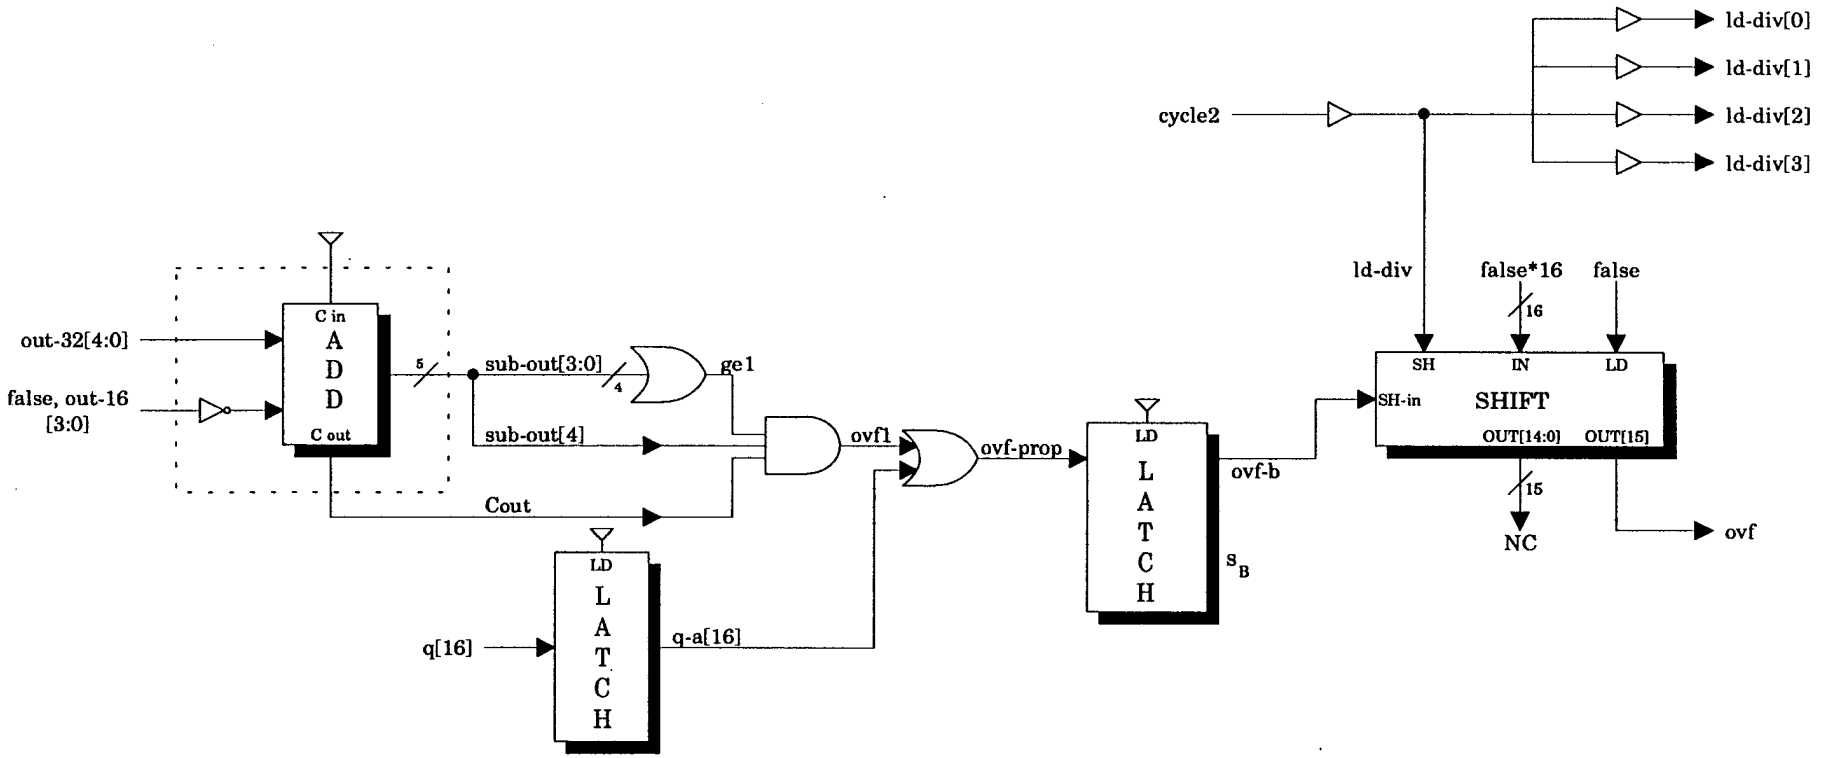

overflow/ovf-gen

Dos: d:\jackson\prem\ovfgen.drw
Gen: <chip>/math/divider/overflow/ovf-gen

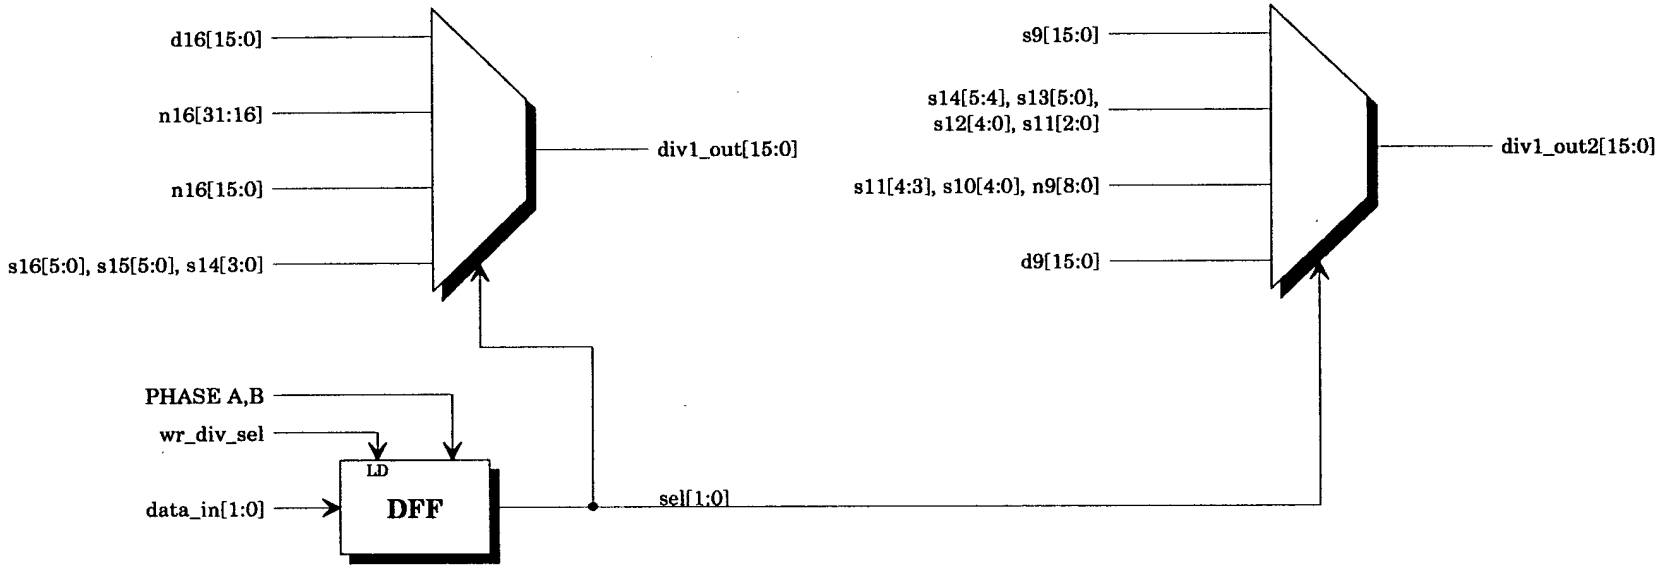

divider1/probe

Dos: d:\jackson\prem\
Gen: <chip>/

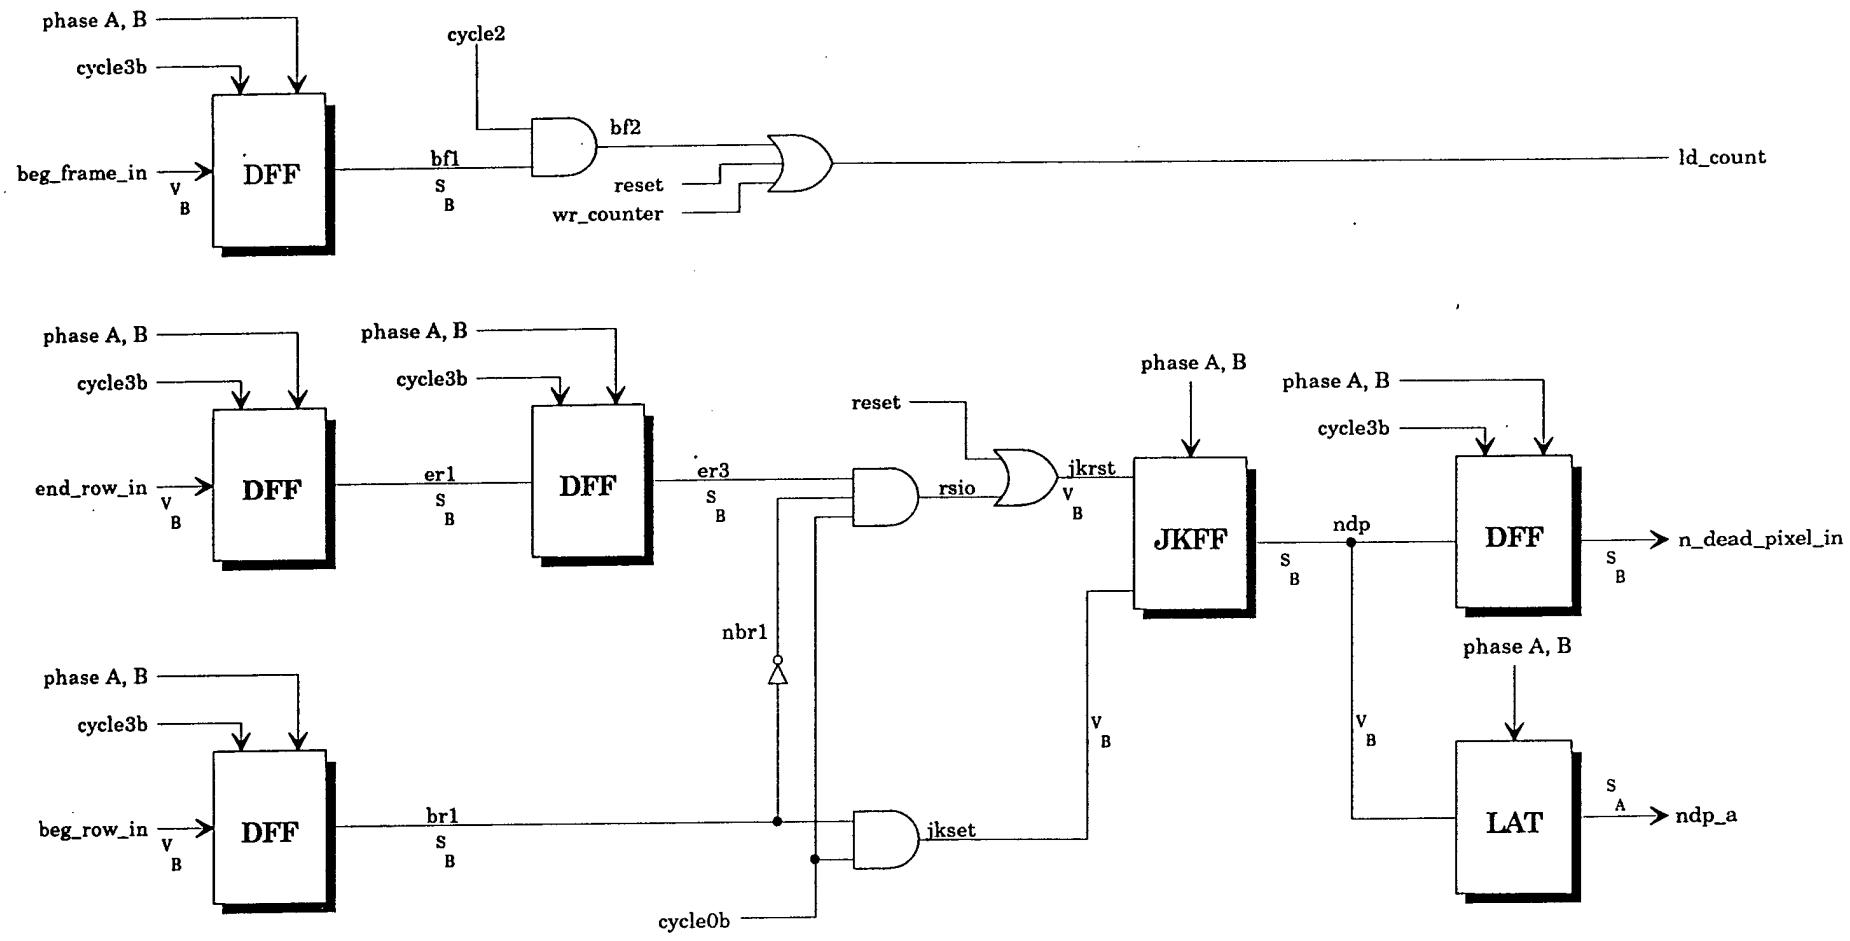

nuc/math/pix_counter

(page 1 of 2)

Dos: d:\gtnuc\pix2.drw
Gen: <chip>/pix_counter

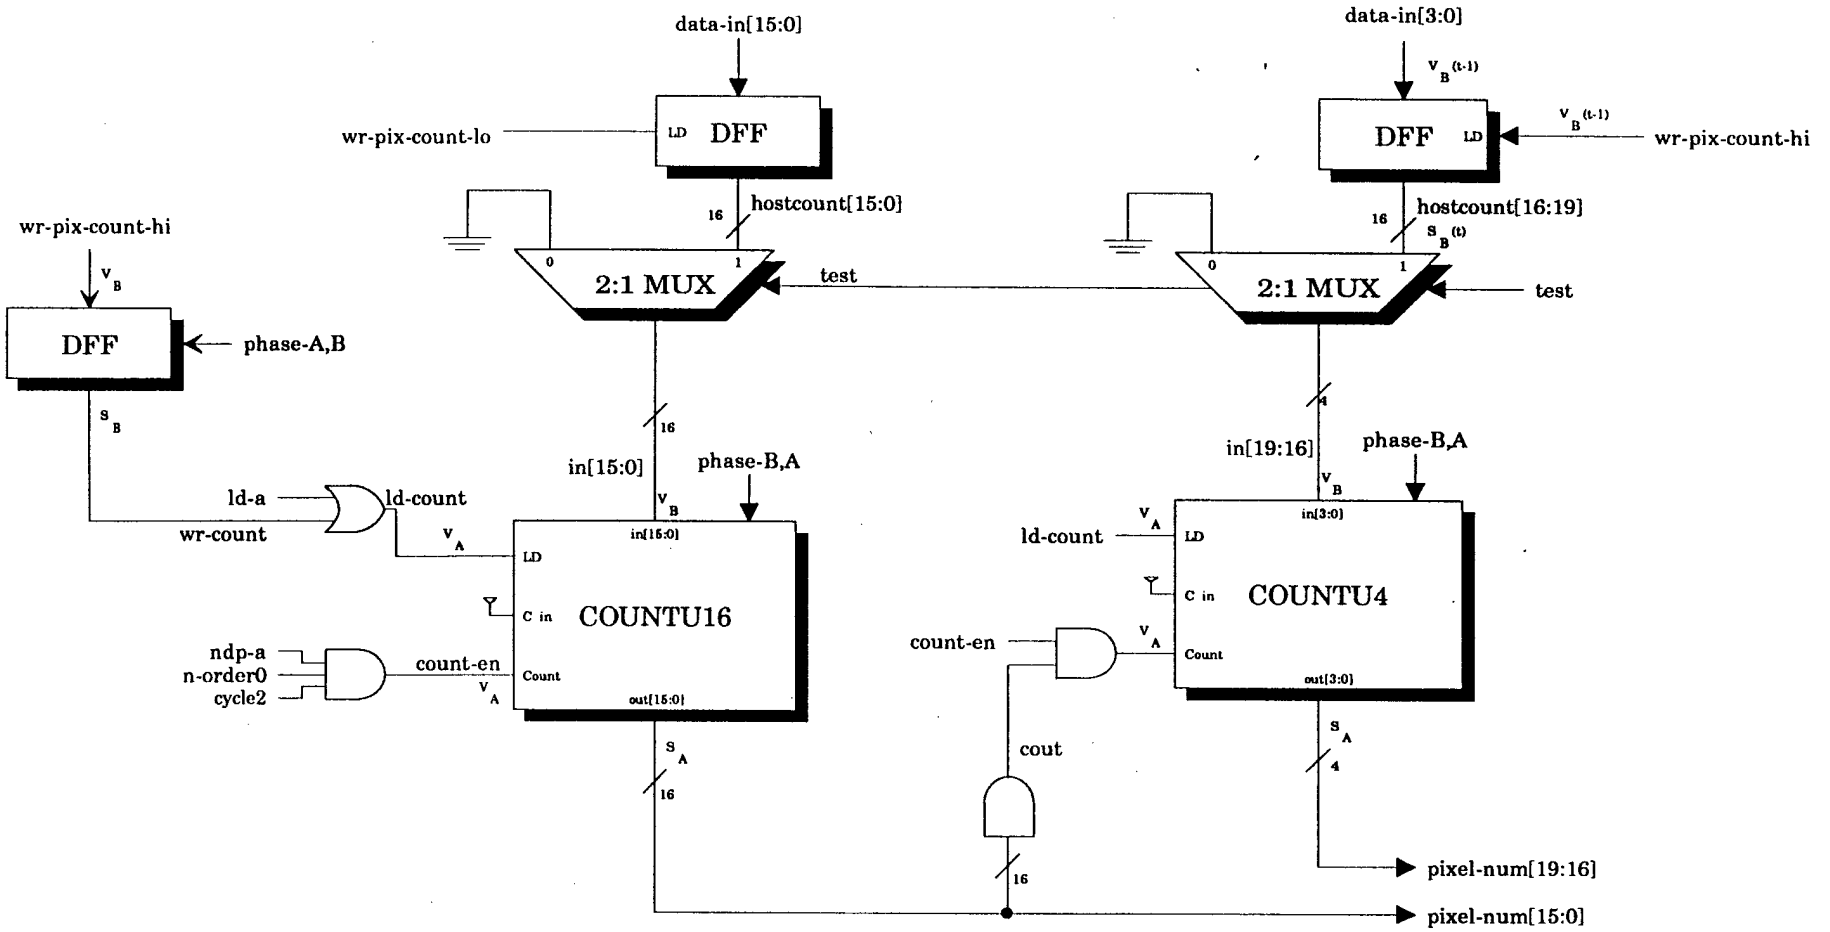

nuc/math/pixcounter

(page 2 of 2)

Doc: d:\jackson\prem\pixcoun2.drw
Gen: <chip>/nuc/math/pixcounter

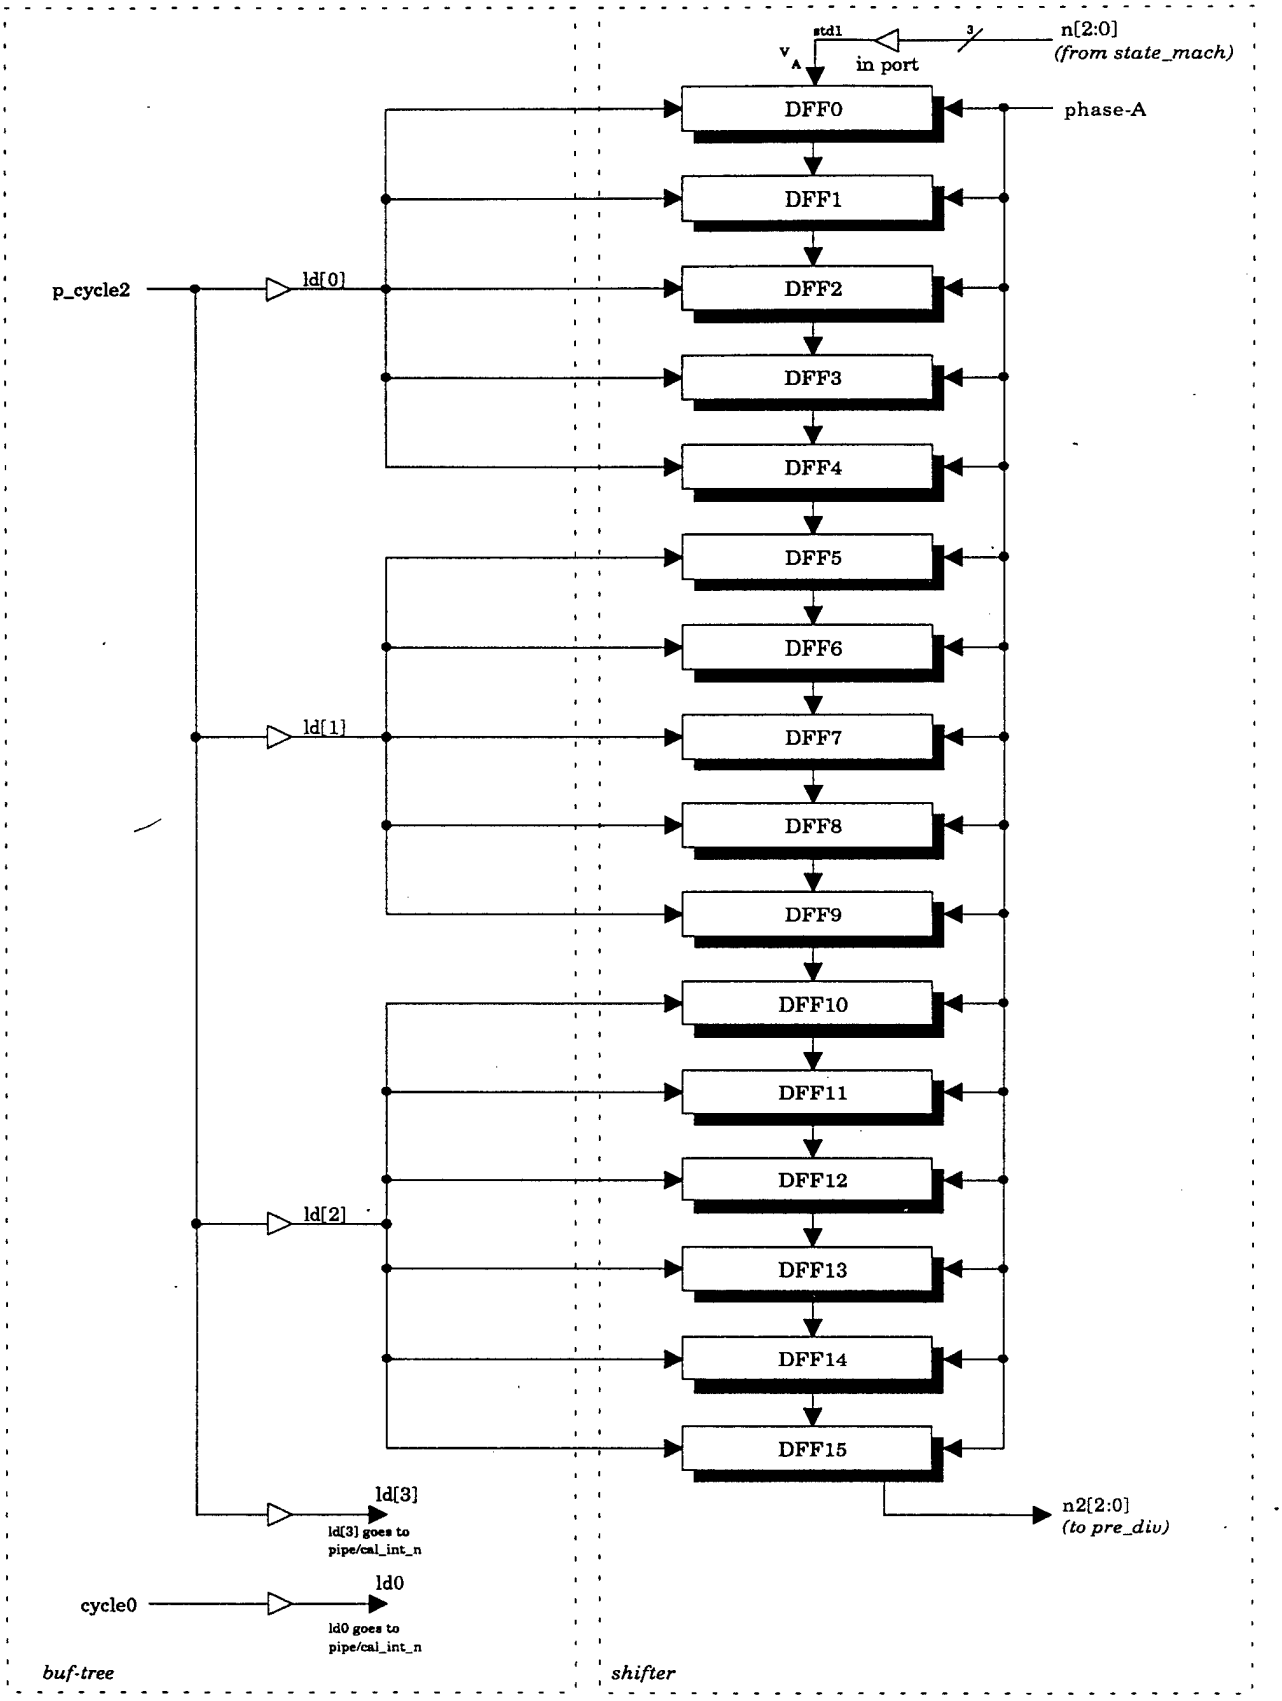

nuc/math/pipe

Dos: d:\jackson\prem\pipe.drw
Gen: <chips>/nuc/math/pipe

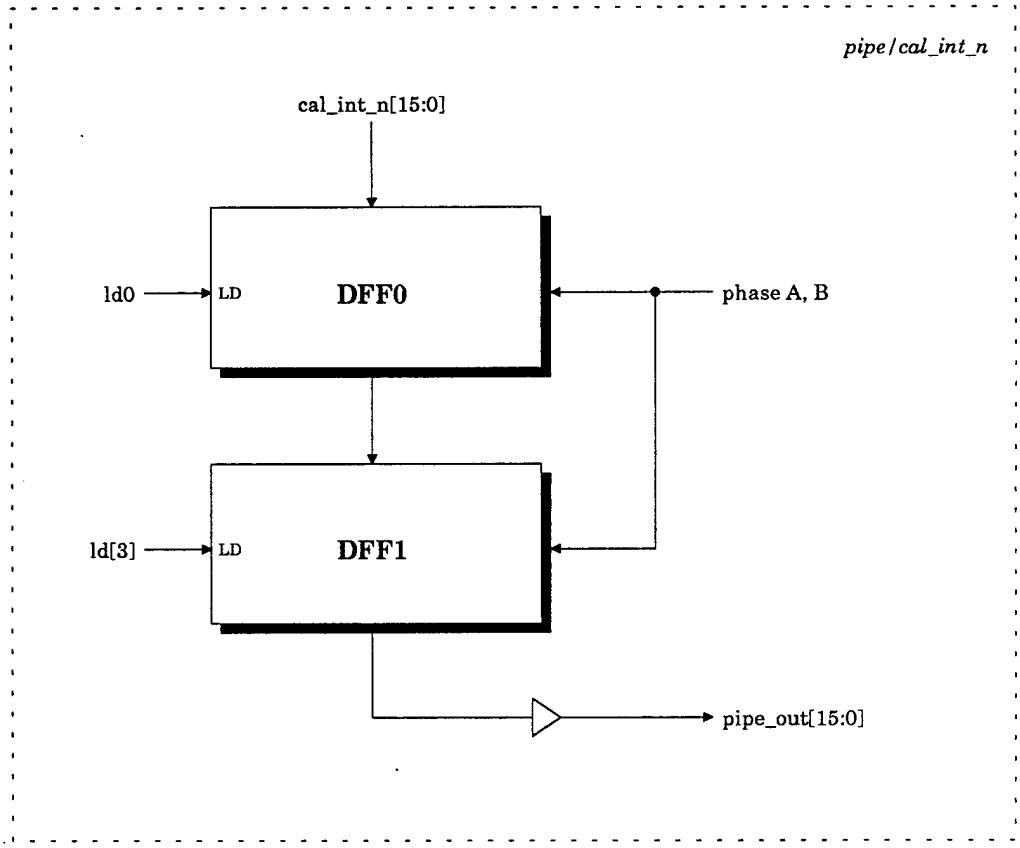

pipe/cal_int_n

Dos: d:\jackson\prem\cal_int.drw
Gen: <chip>/pipe/cal_int_n

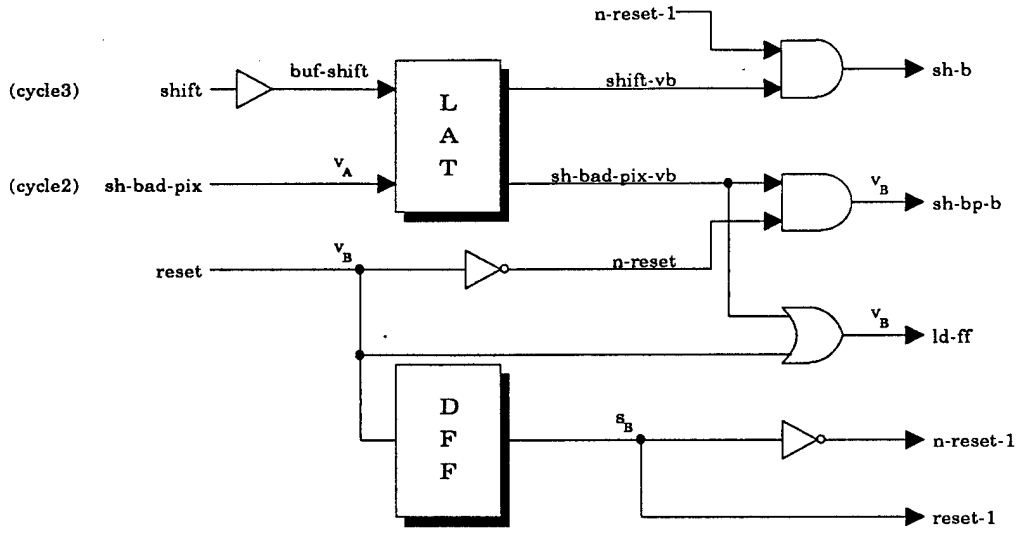

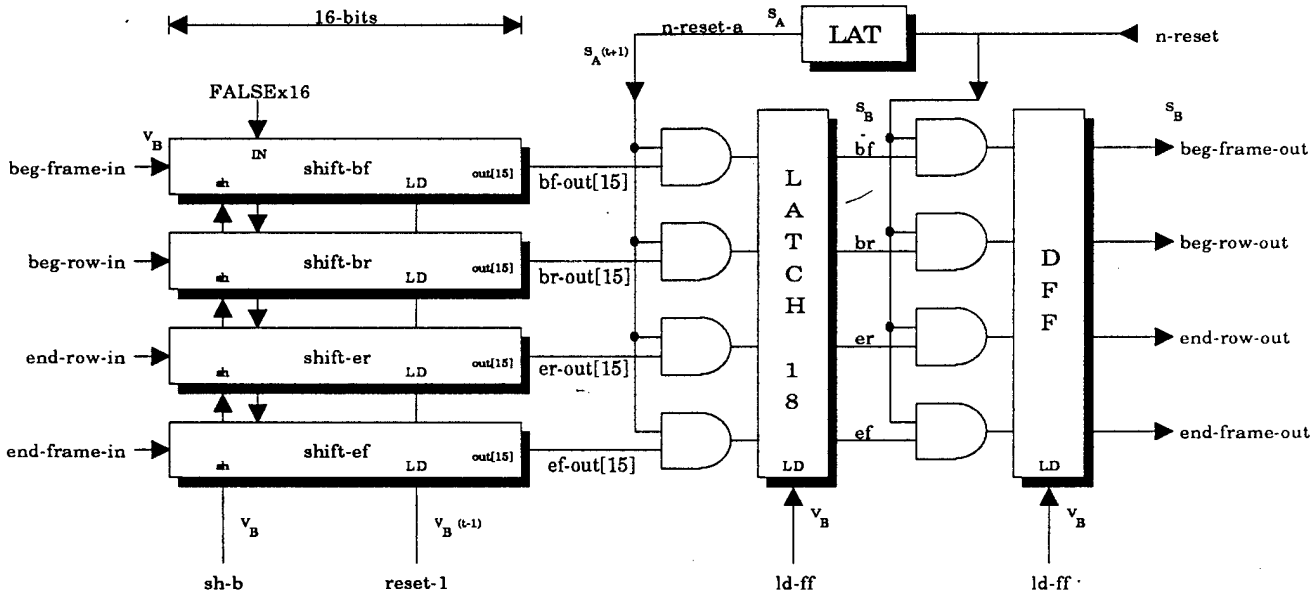

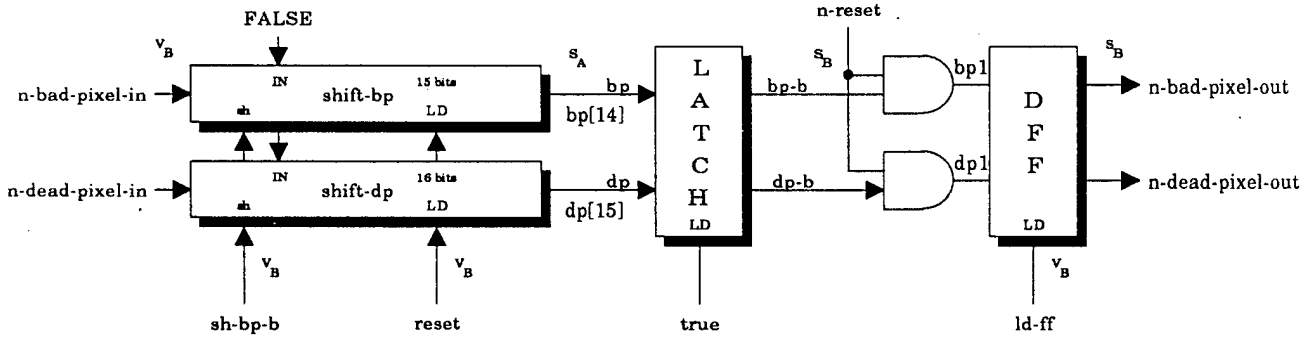

math/frame-sync

(page 1 of 2)

Doc: d:\jackson\prem\frame1.drw
Gen: <chip>/math/frame-sync

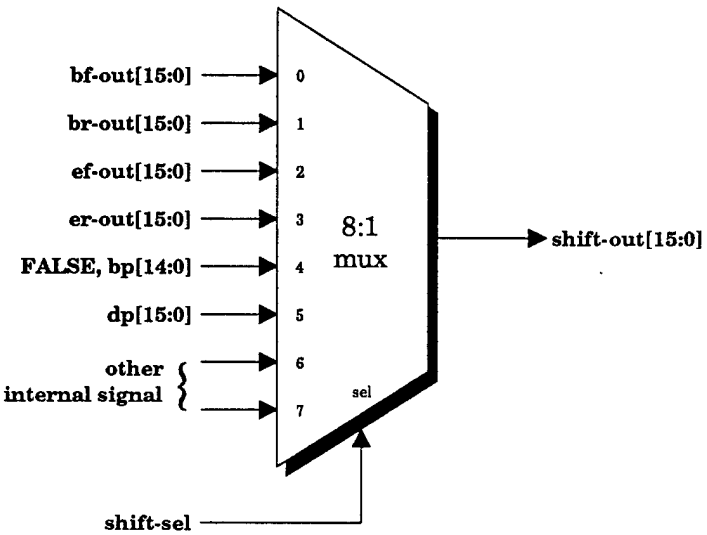

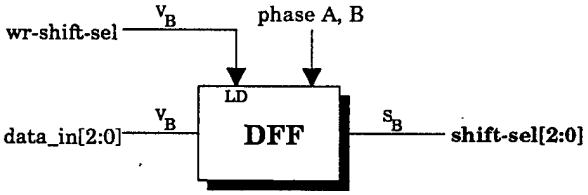

math/frame-sync

(page 2 of 2)

Doc: d:\jackson\prem\frame2.drw
Gen: <chip>/math/frame-sync

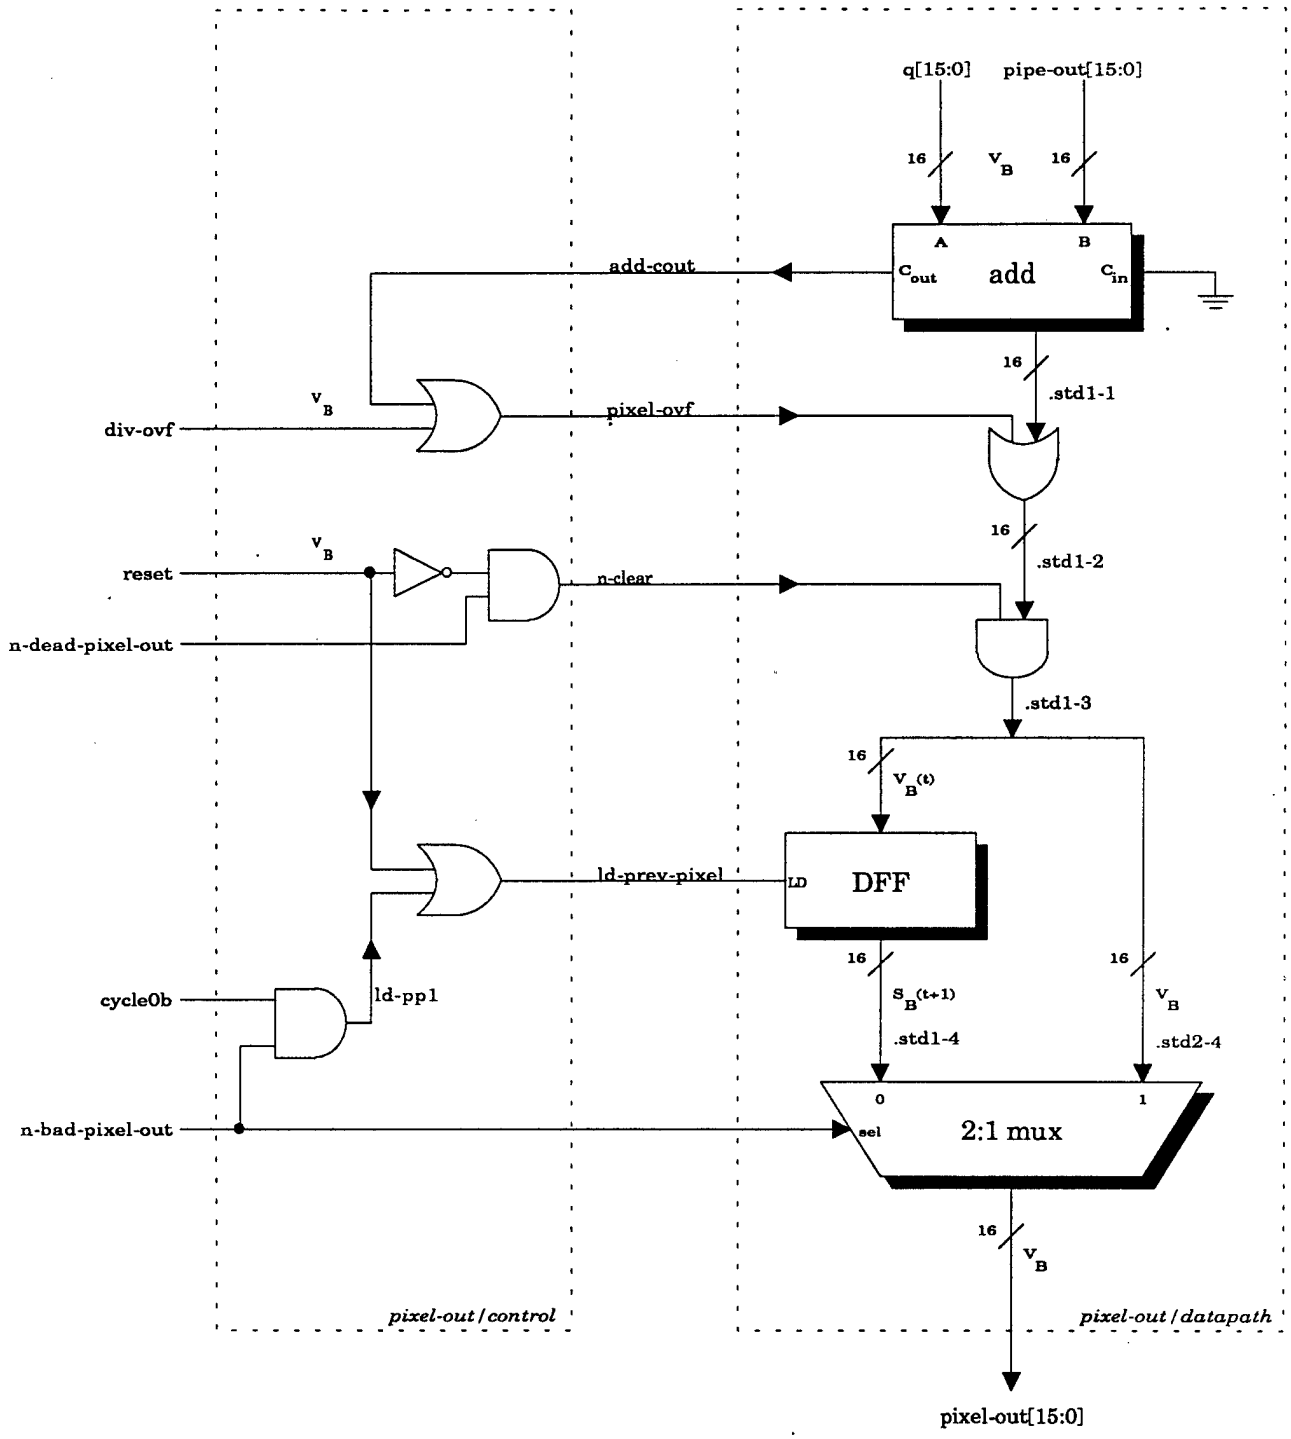

nuc/math/pixel-out

Dos: d:\jackson\prem\pixelout.drw
Gen: <chip>/math/pixel-out

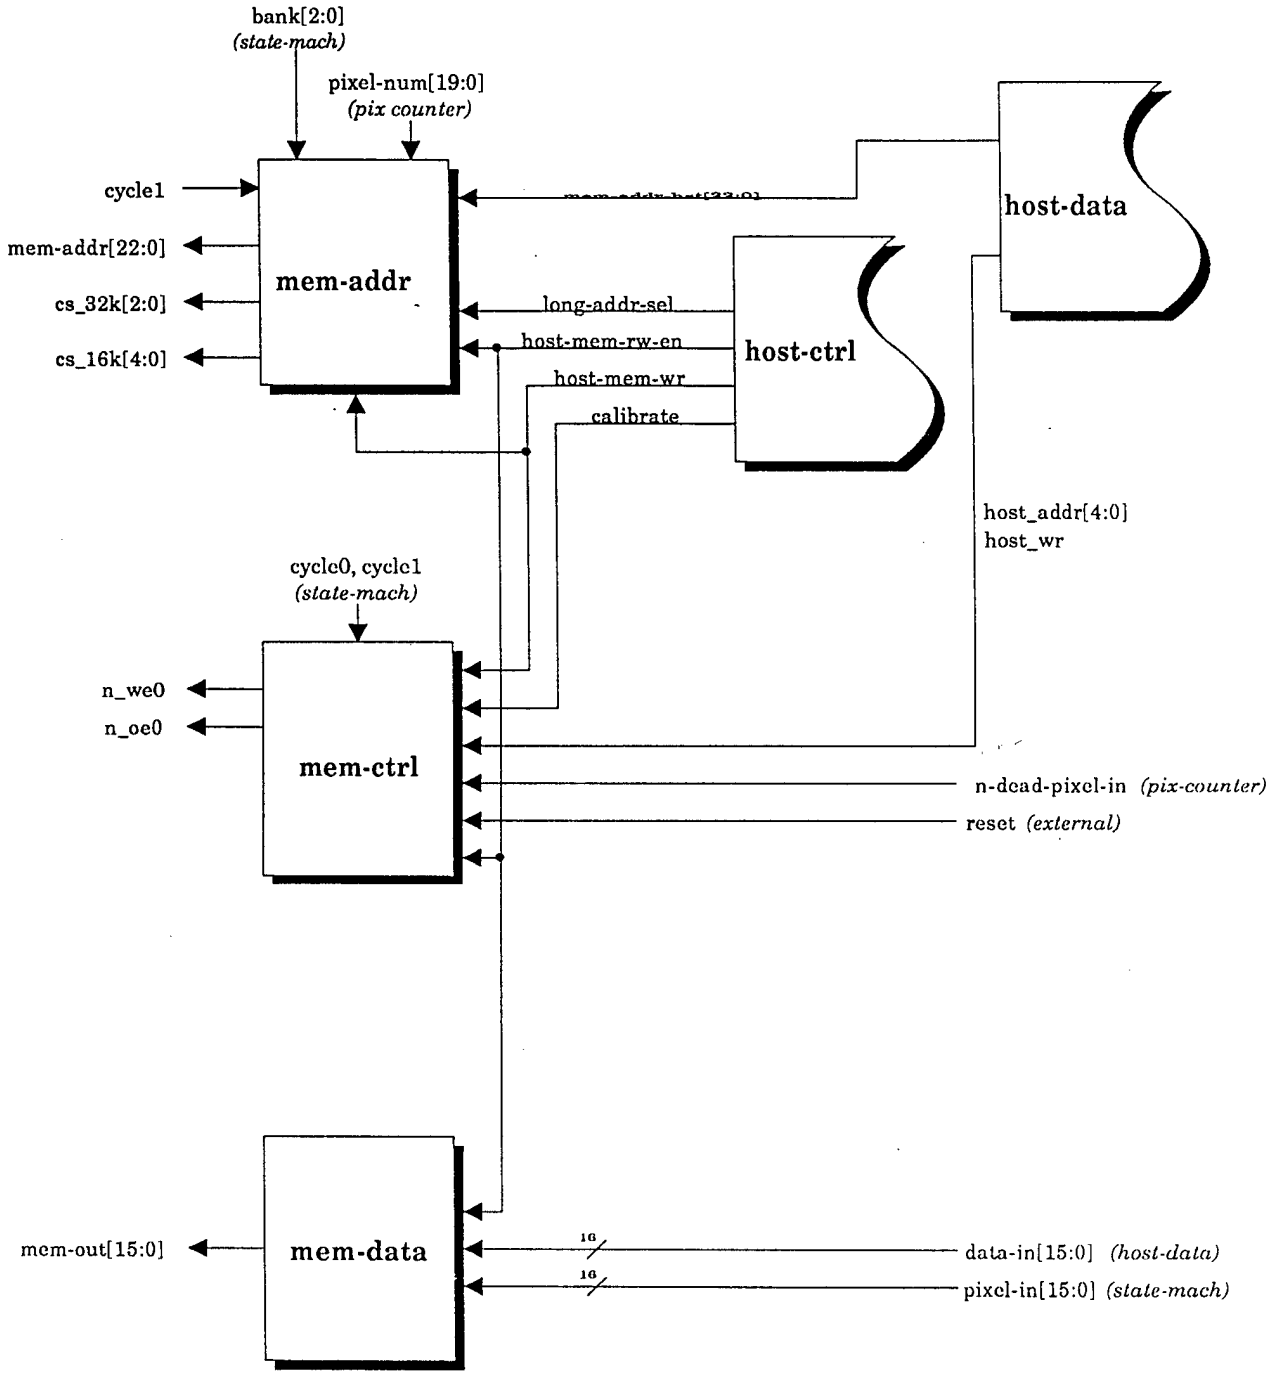

math/mem-host-if

Dsn: d:\jackson\prem\memhost1.drw
Gen: <chip>/math/mem_host_if

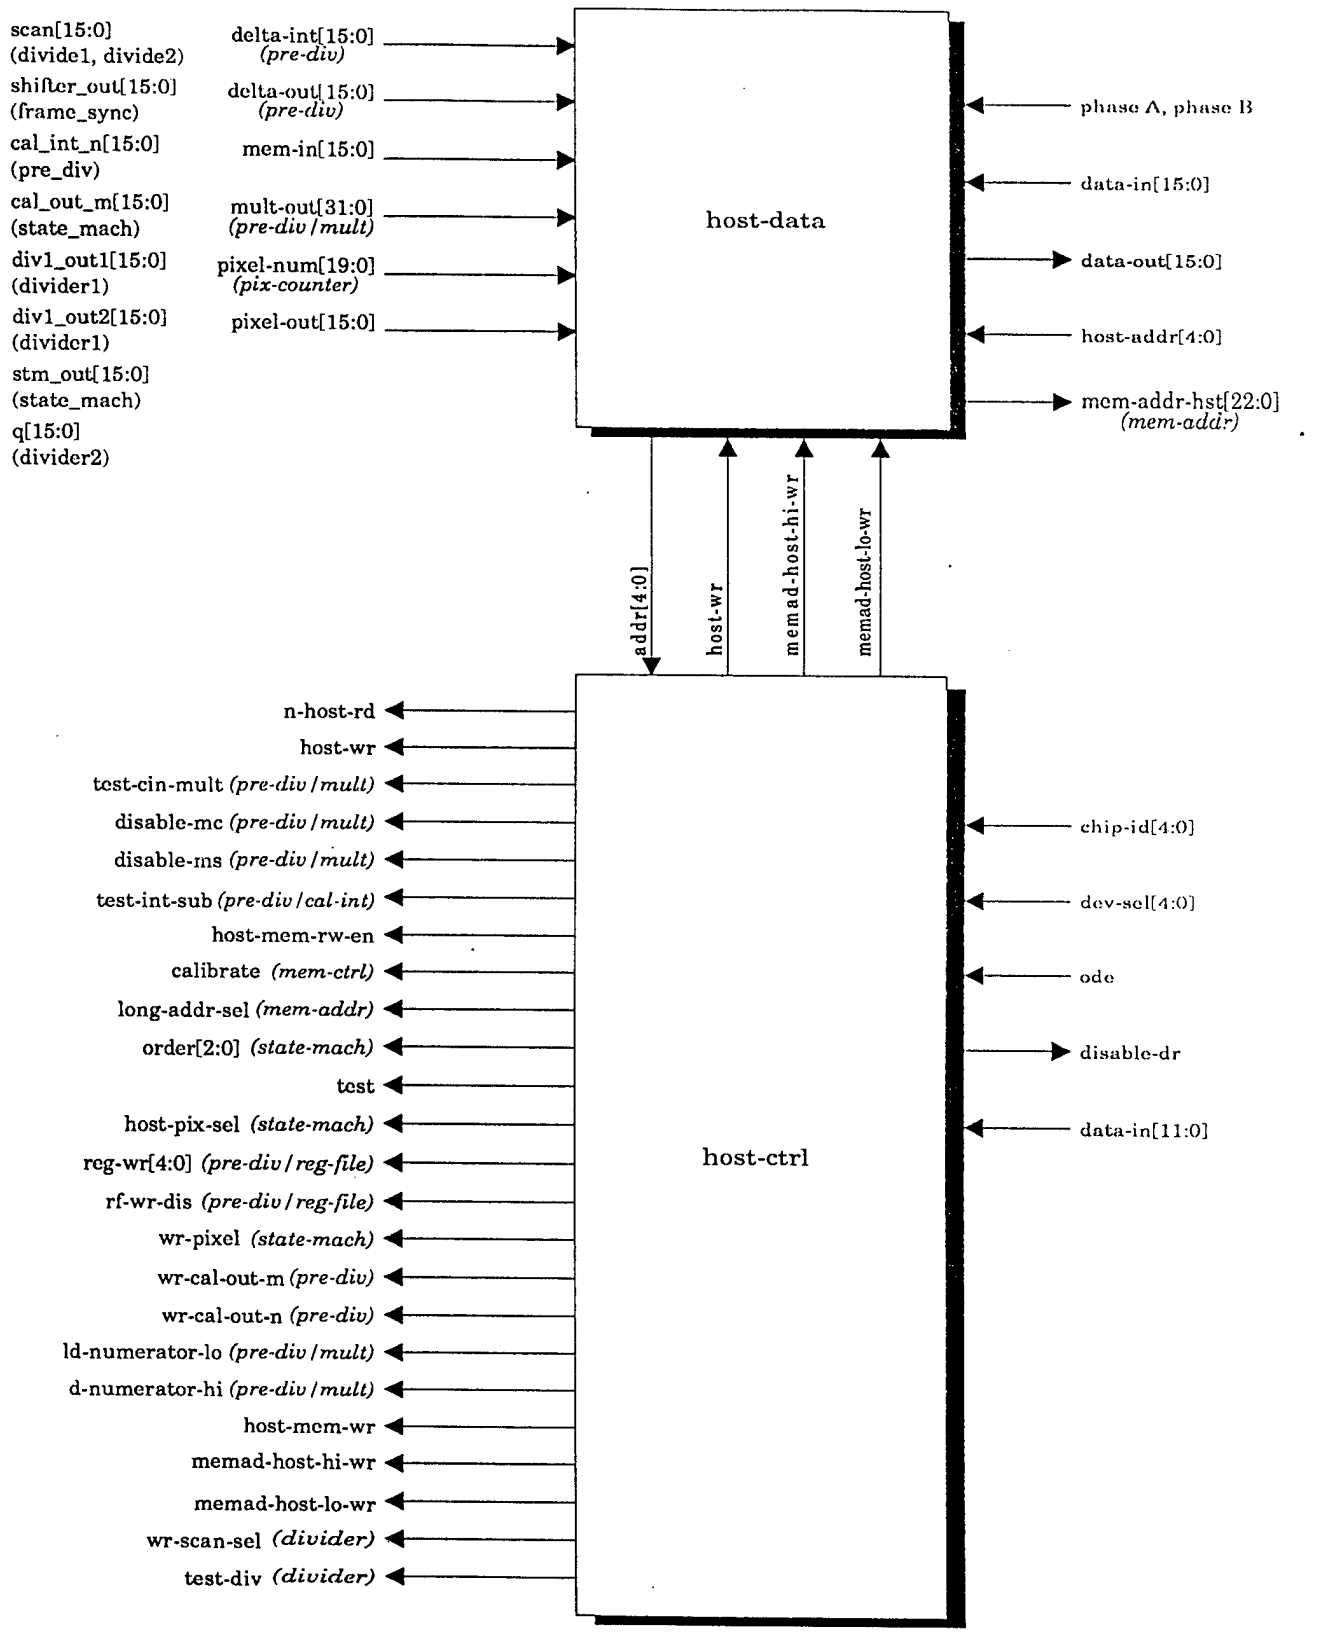

math/mem-host-if

(page 2 of 2)

Doc: d:\jackson\prem\memhost2.drw
Gen: <chips>/math/mem_host_if

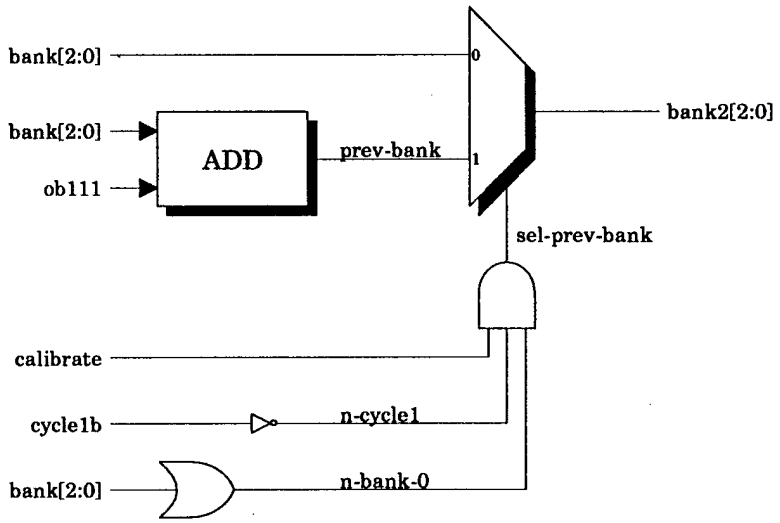

math/mem-host-if/mem-addr

Dos: d:\jackson\prem\bpdetect.drw
Gen: <chip>/math/state-mach/bad-pixel-detection

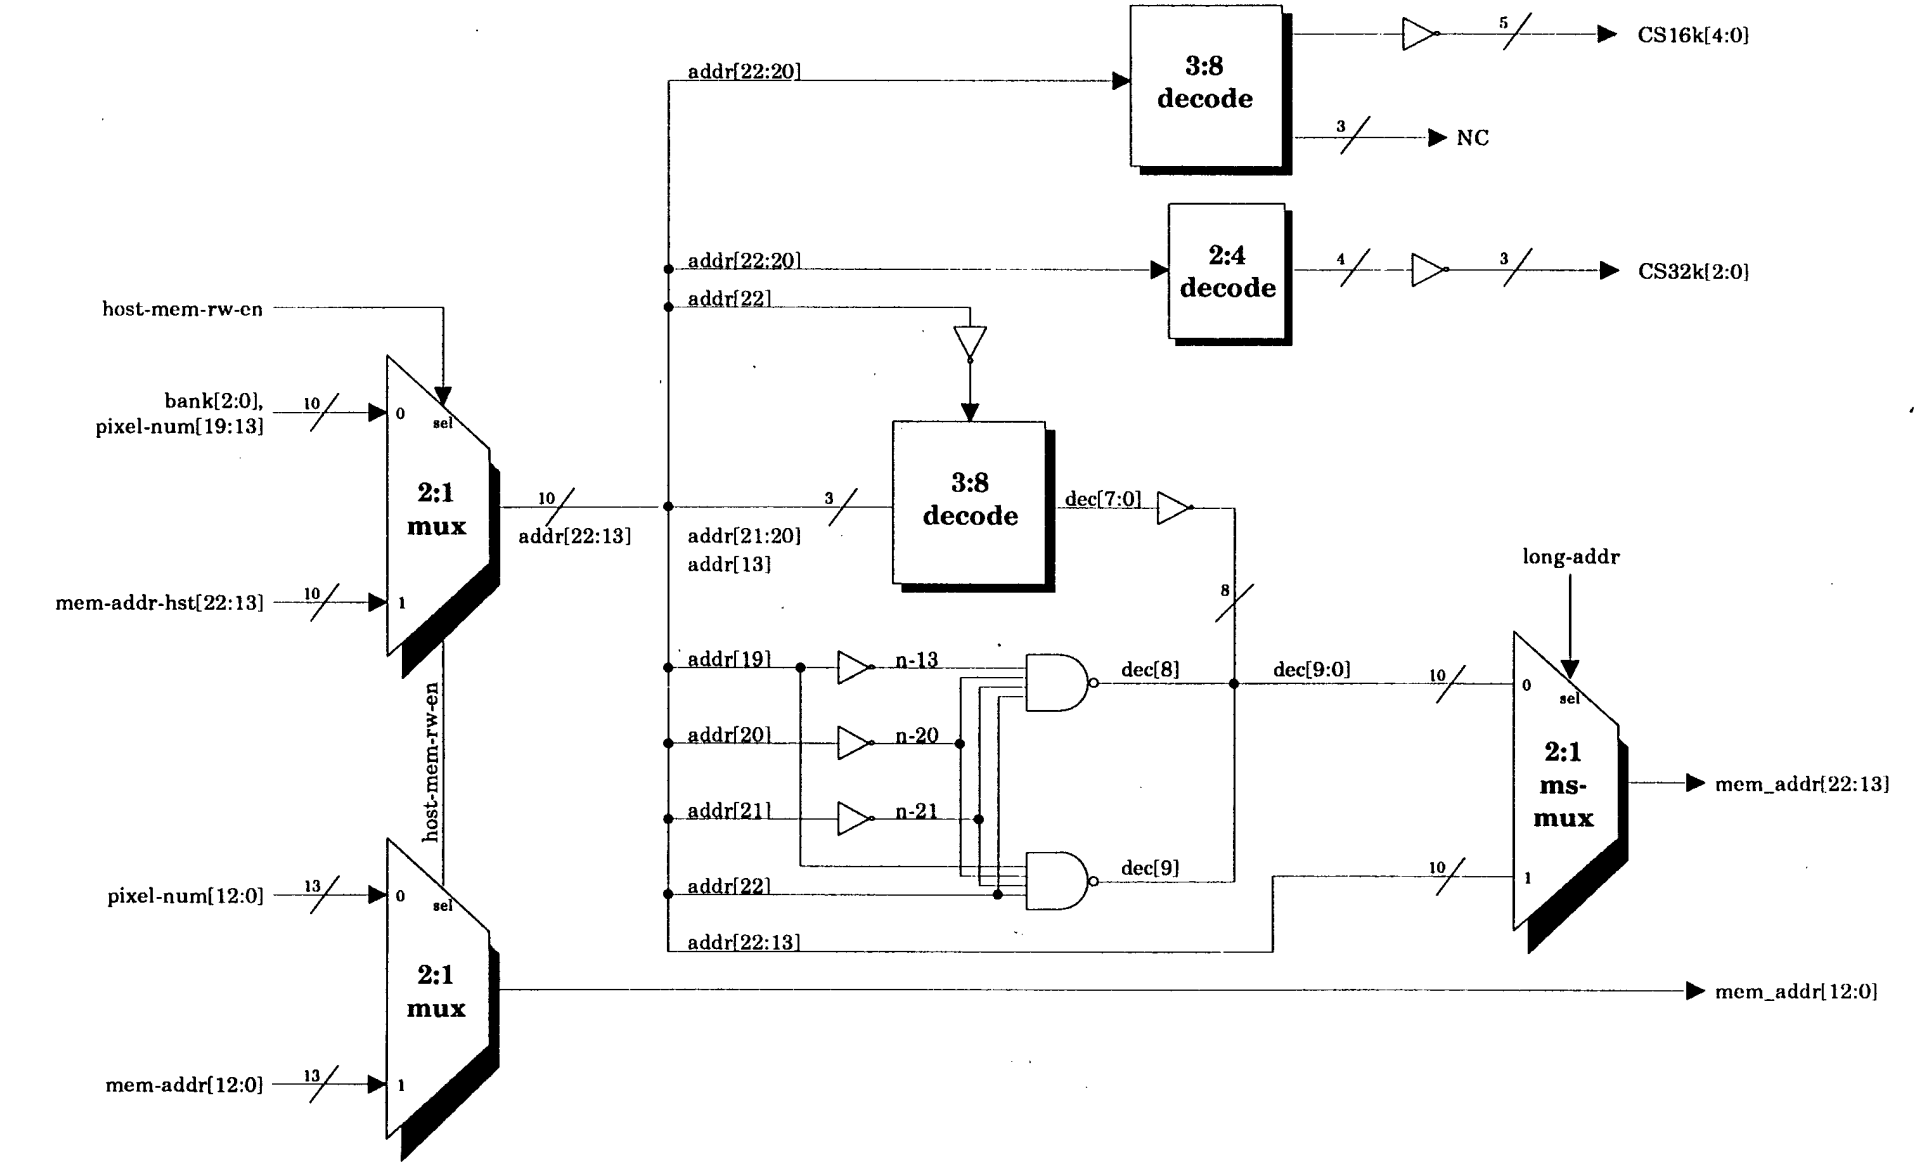

math/mem-host-if/mem-addr

Dos:dr\jackson\prem\memaddr.drw
Gen:<chip>/math/mem-host-if/mem-addr

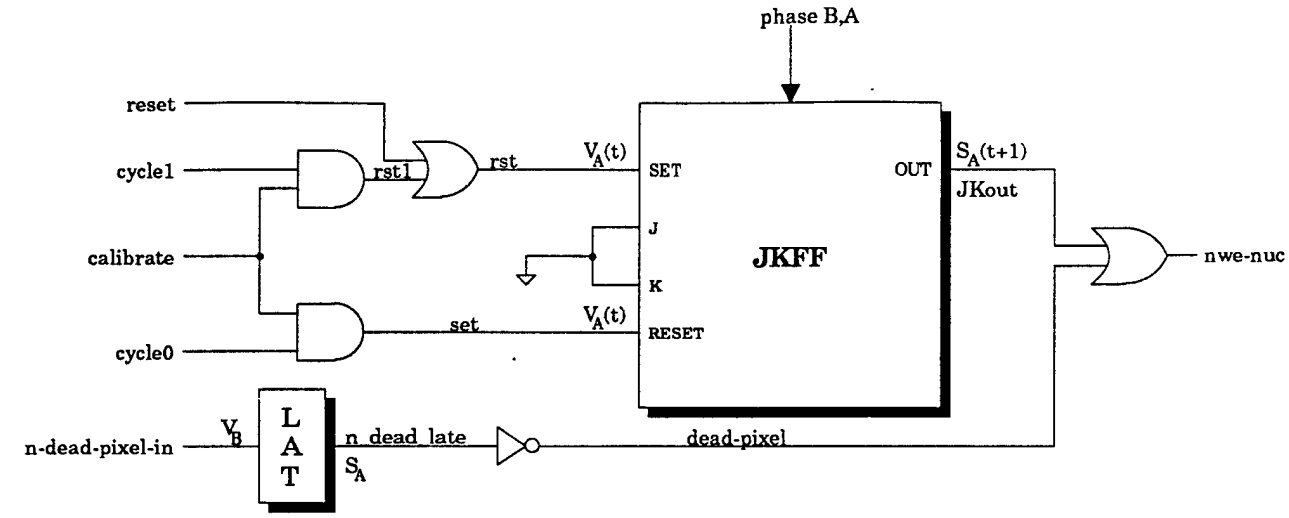

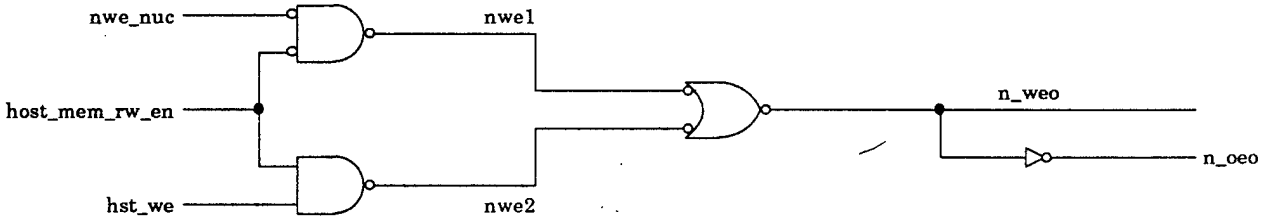

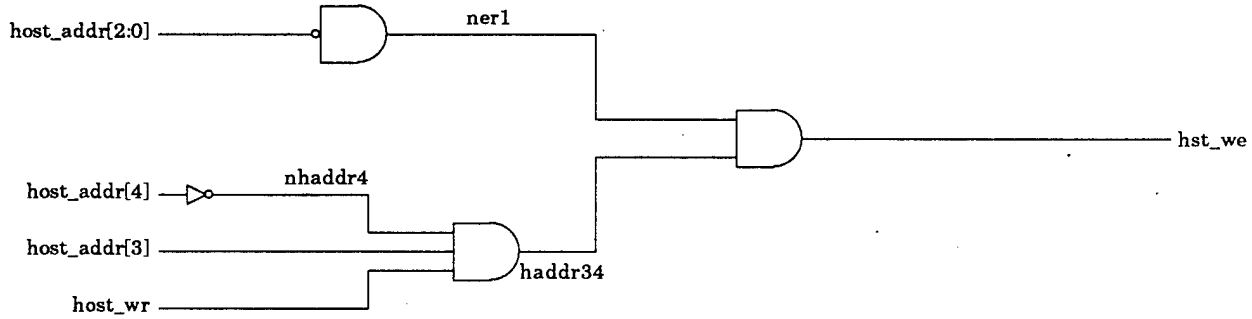

math/mem-host-if-/mem-ctrl

Dos: d:\jackson\prem\memctrl.drw
Gen: <chip>/math/mem-host-if/mem-ctrl

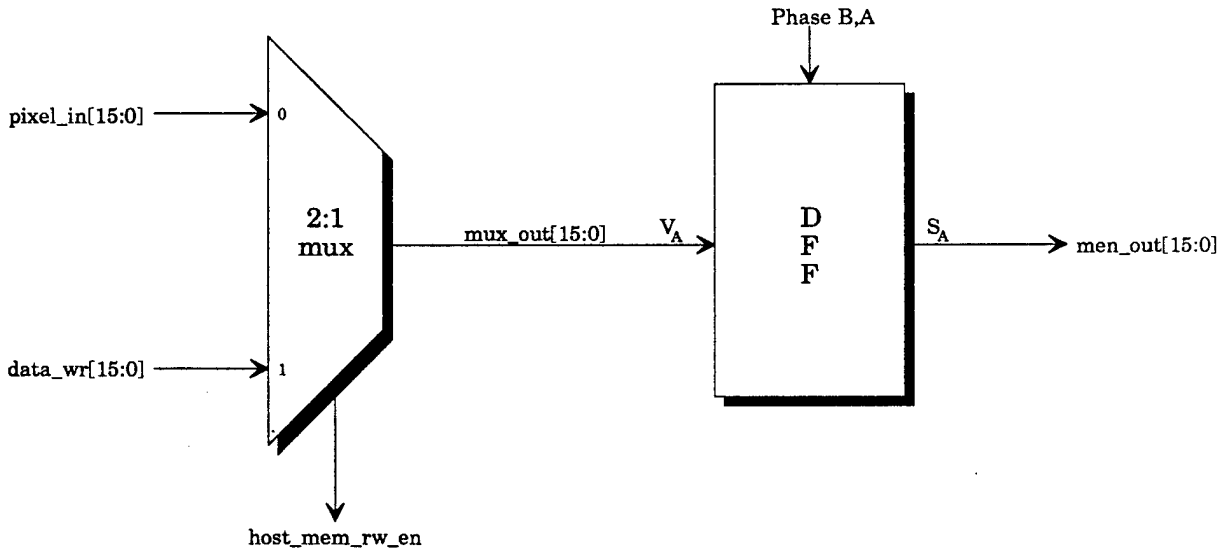

math/mem-host-if/mem-data

Doc: d:\jackson\prem\memdata.drw
Gen: <chip>/math/mem-host-if/mem-data

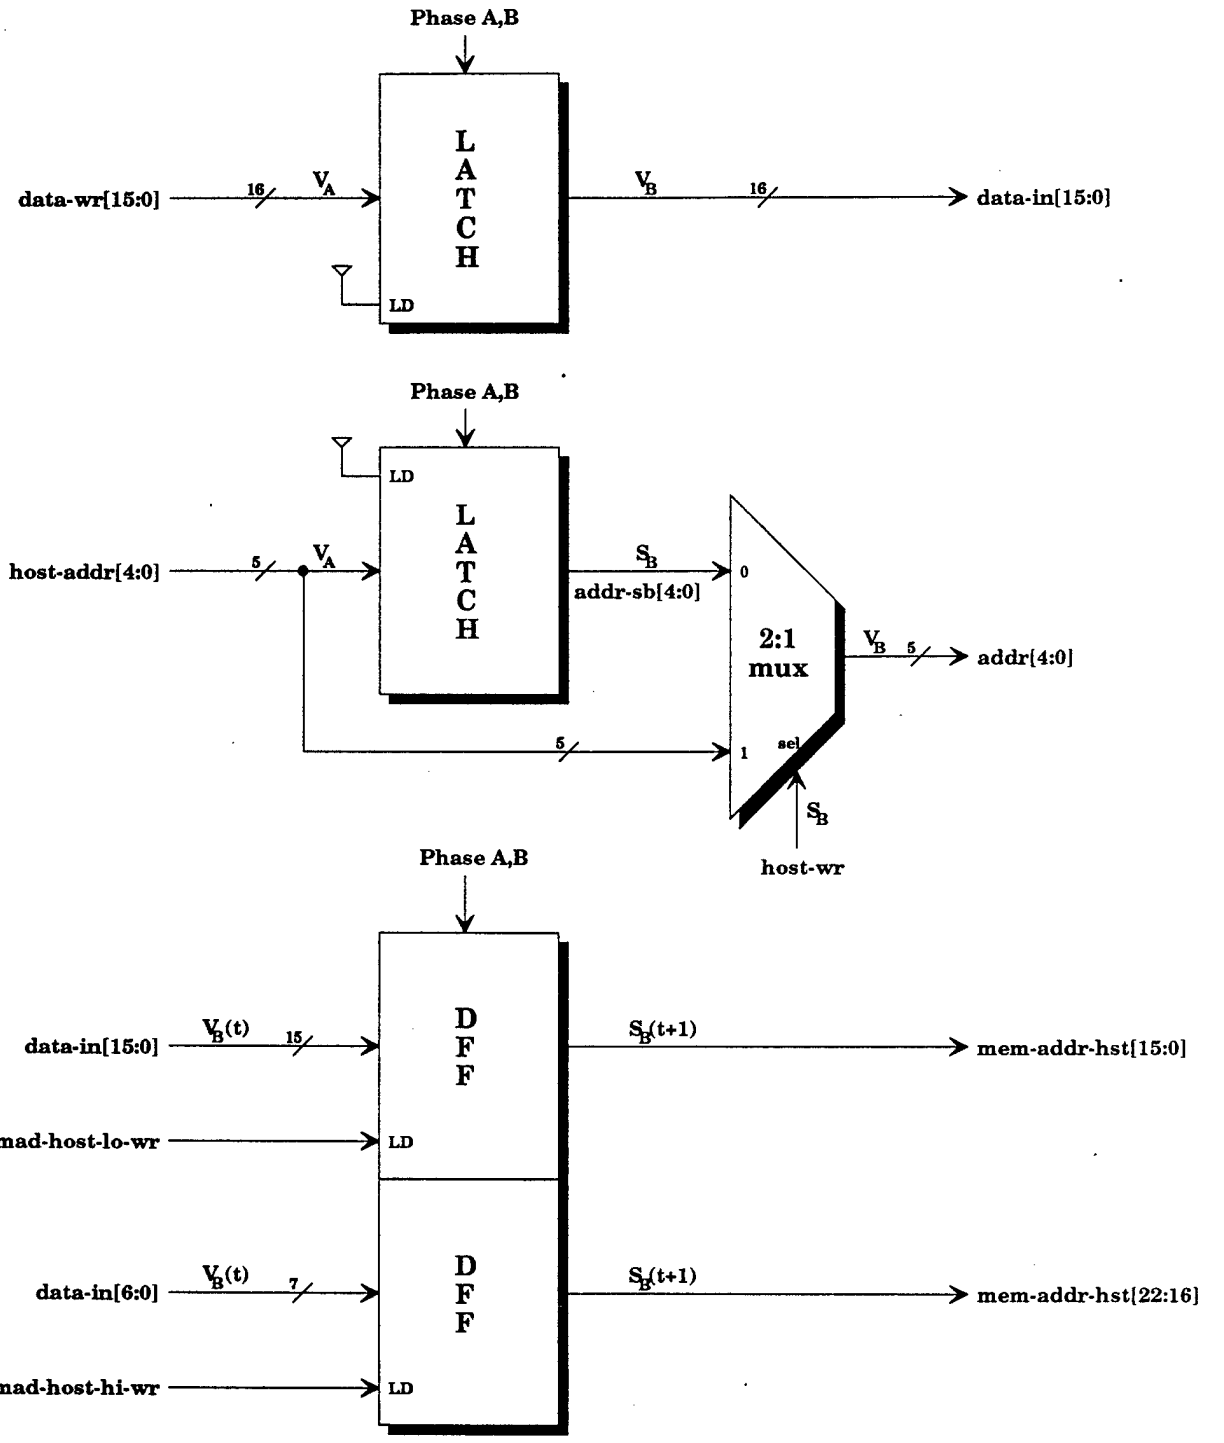

math/mem-host-if/host-data

(page 1 of 2)

Dos: d:\jackson\prem\hosdata1.drw
Gen: <chip>/math/mem-host-if/host-data

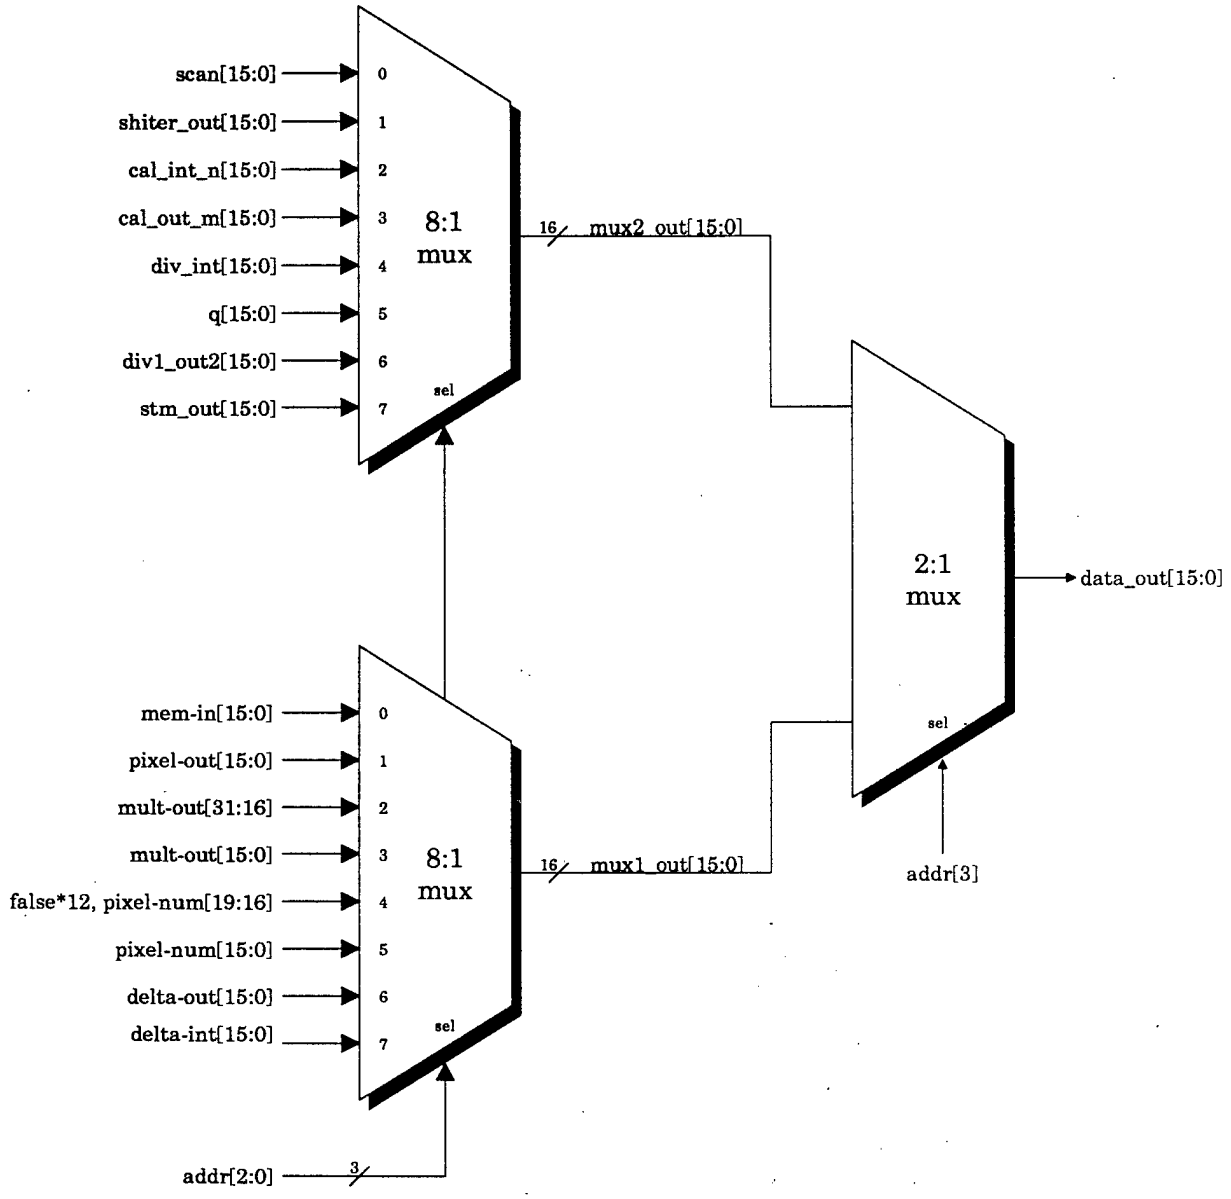

math/mem-host-if/host-data

(page 2 of 2)

Dos: d:\jackson\prem\hosdata2.drw
Gen: <chip>/math/mem-host-if/host-data

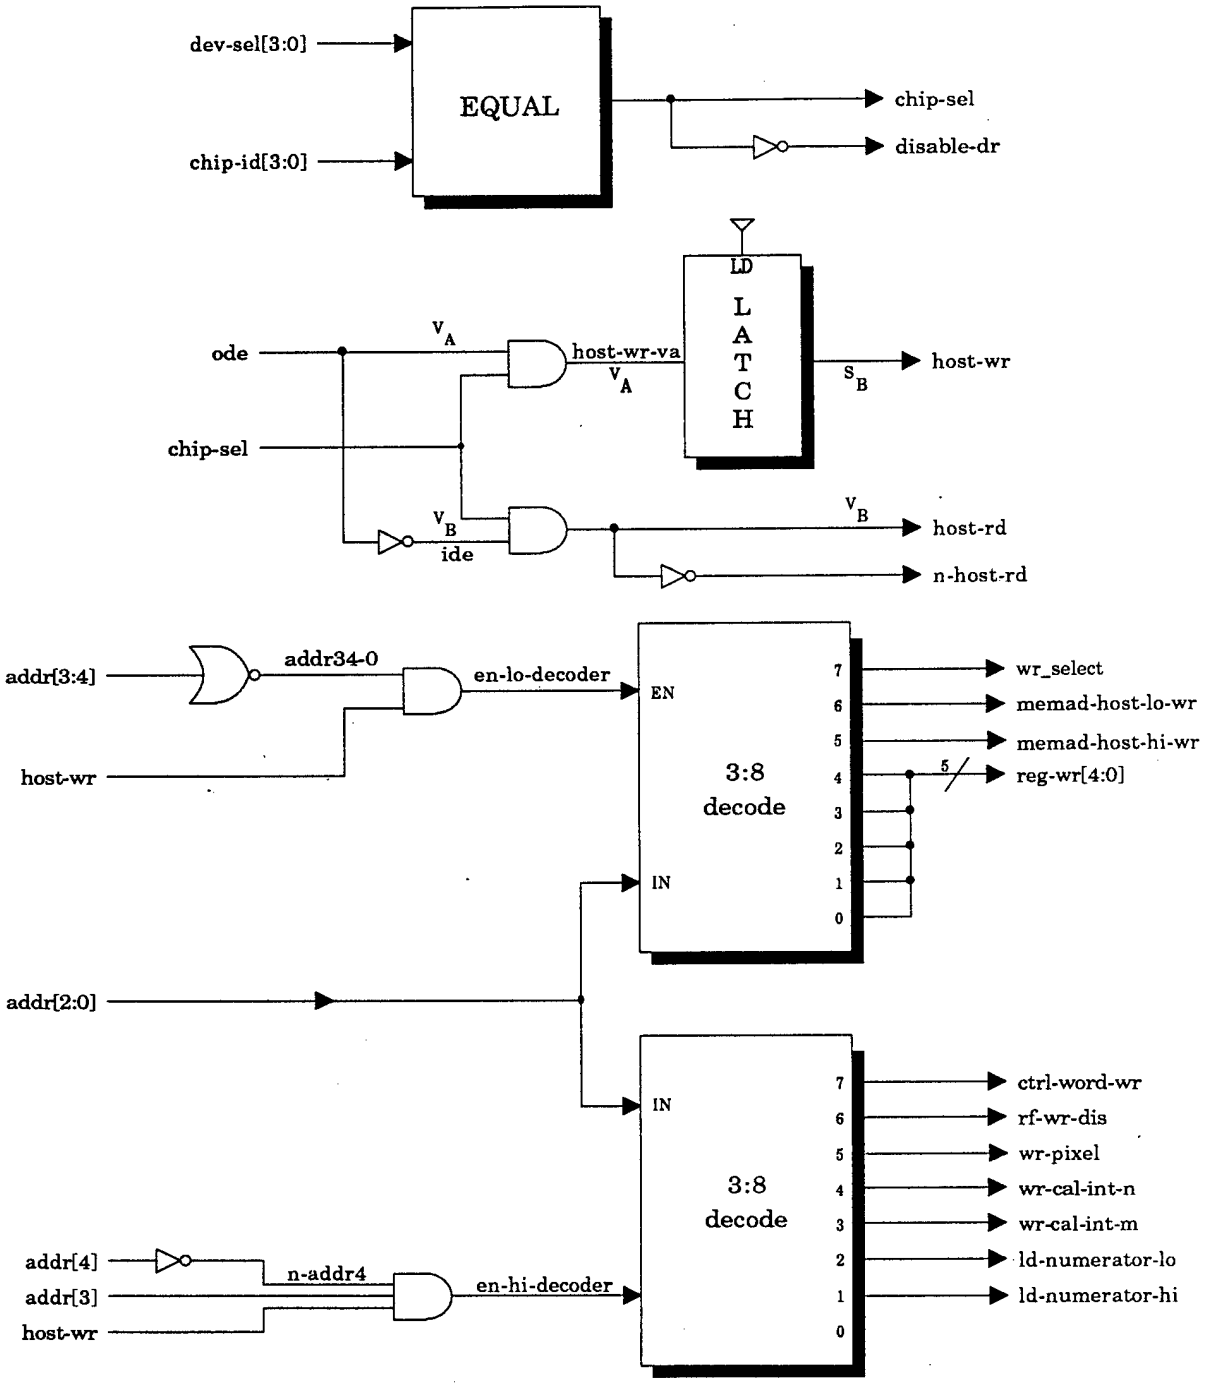

math/mem-host-if/host-ctrl

(page 1 of 2)

Dos: d:\jackson\prem\hostctrl.drw
Gen: <chip>/math/mem-host-if/host-ctrl

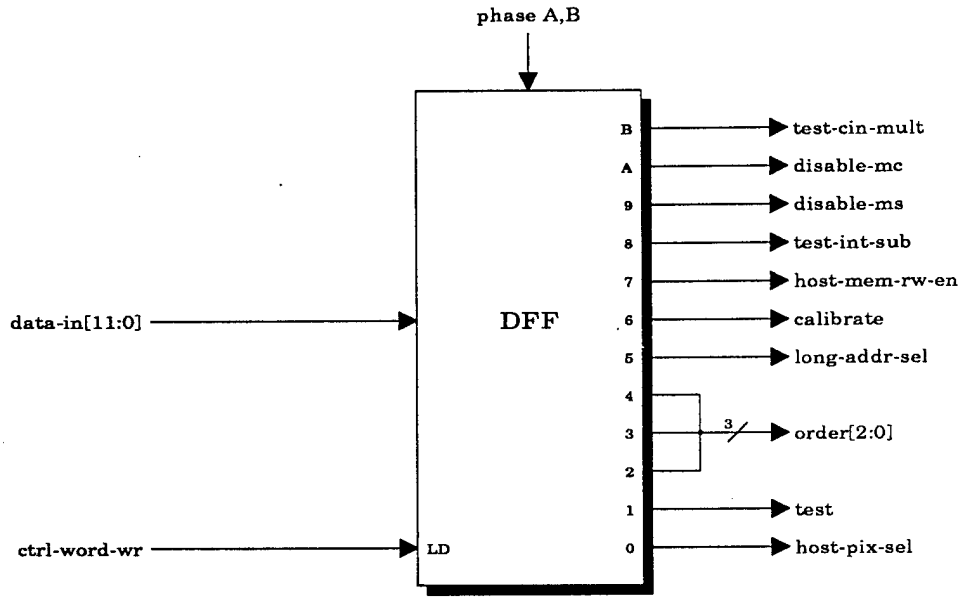

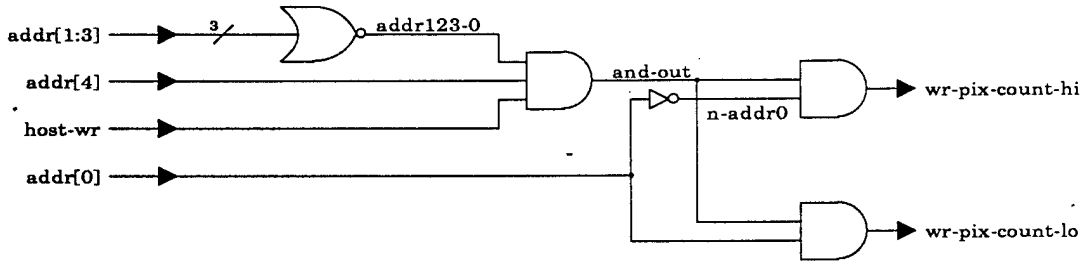

math/mem-host-if/host-ctrl

(page 2 of 2)

Dos: d:\jackson\prem\hostctr2.drw
Gen: <chip>/math/mem-host-if/host-ctrl

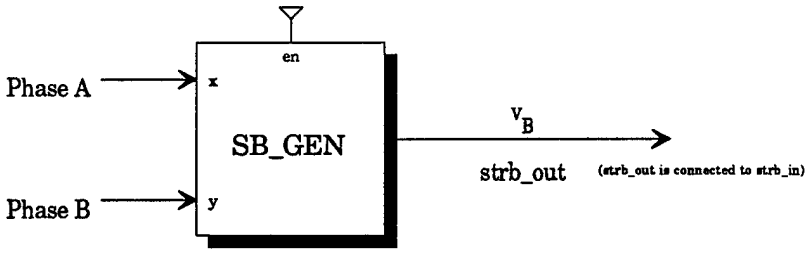

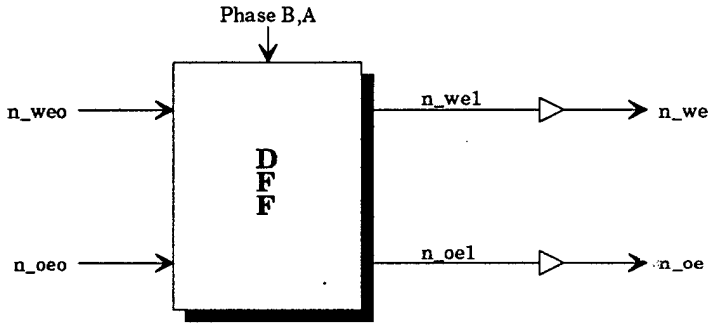

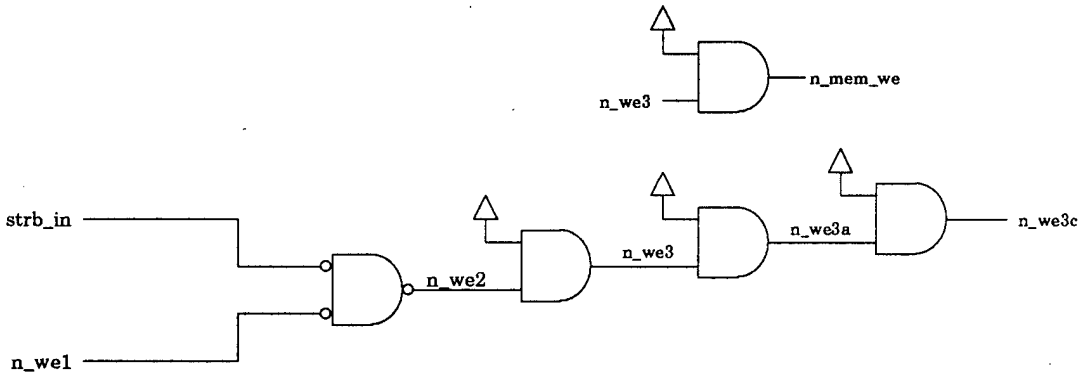

math/strob

Doc: d:\jackson\prem\strob.drw
Gen: <chip>math/strob

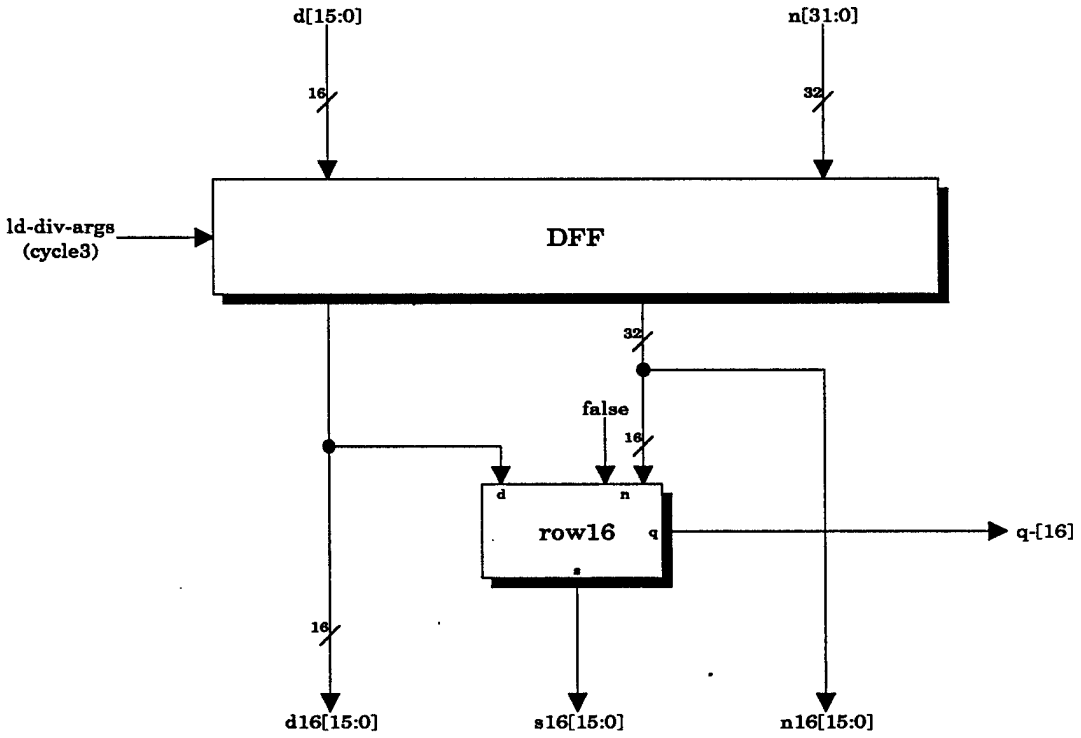

math/divider/Row16

Des: d:\jackson\prem\row16.drw
Gen: <chip>/math/divider/row16

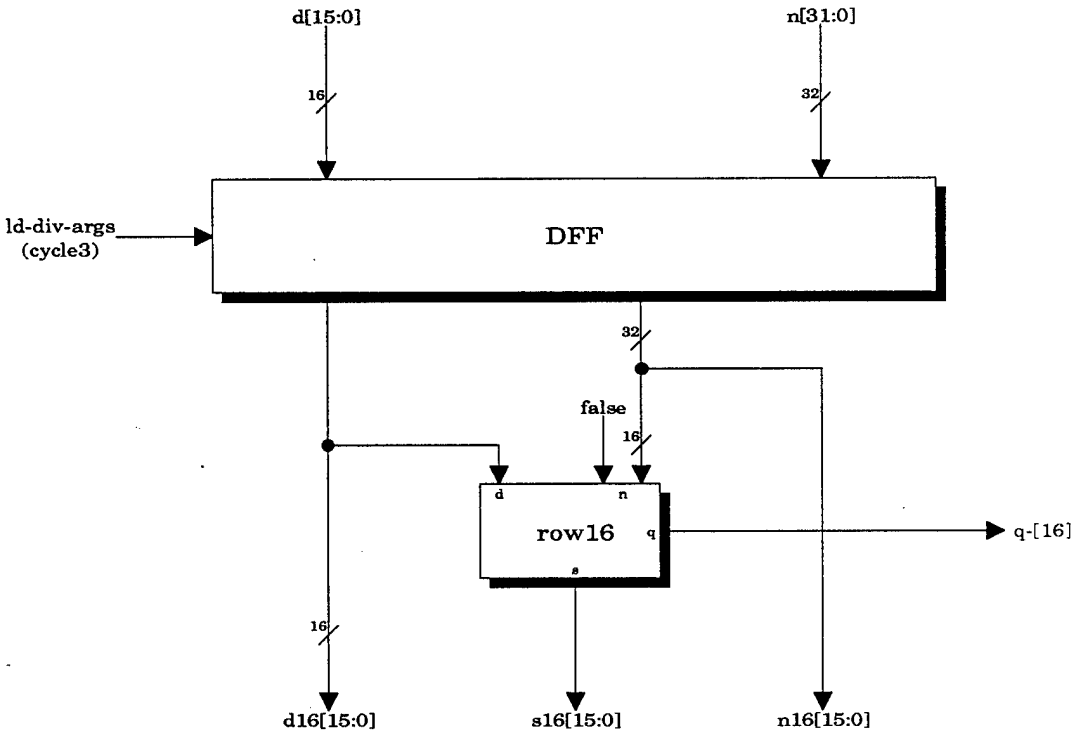

math/divider/Row16

Dos: d:\jackson\prem\row16.drw
Gen: <chip>/math/divider/row16

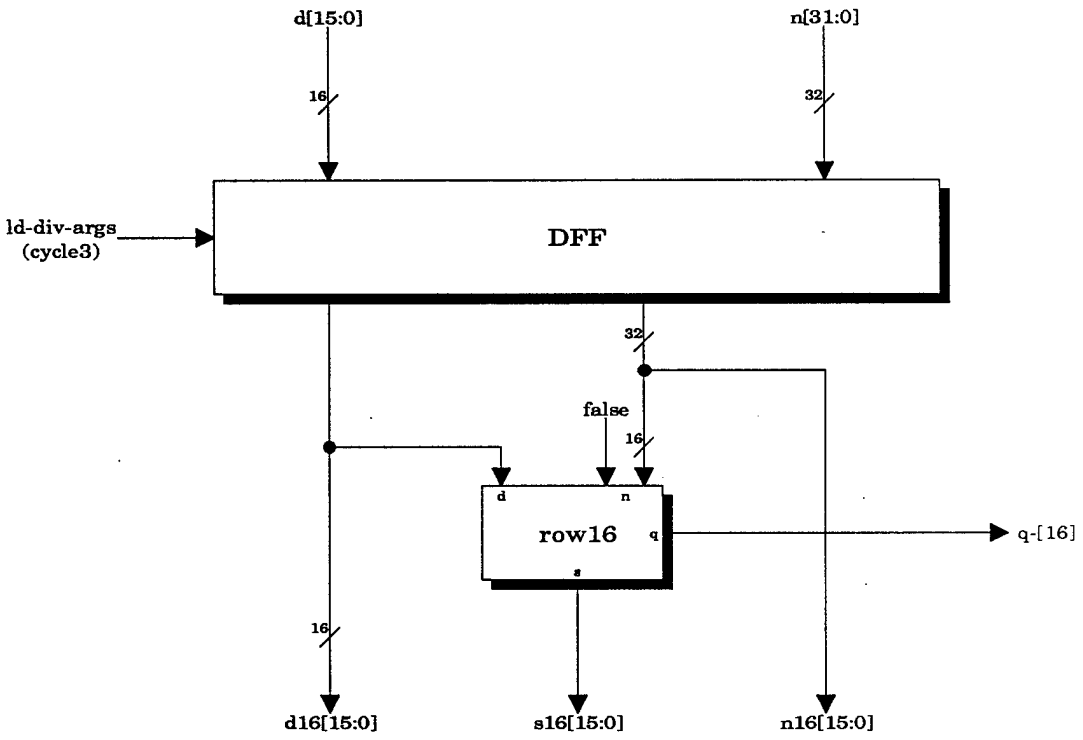

math/divider/Row16

Dos: d:\jackson\prem\row16.drw
Gen: <chip>/math/divider/row16